

1 SP 5A-33N



: 5201933

, EN 1.4401 (AISI 316),
MS40003

40 °C.

MP204 Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
 : 135
 : SIC/SIC
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : CYLINDRICAL


EN 1.4401
AISI AISI 316

EN 1.4401
AISI AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

: Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 3
 (2), : 3
 : 50 Hz
 : 3 x 380-400-415
 : 7.70-7.85-8.10 A
 : 460-490-500 %
 Cos - : 0.82-0.77-0.73
 : 2850-2865-2875 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195608
 :
 : MEI : 0.50
 ErP : EuP /
 : 30.2
 : 32
 : 66.8 ³
 C : DK
 : 8413702900

5201933 SP 5A-33N 50

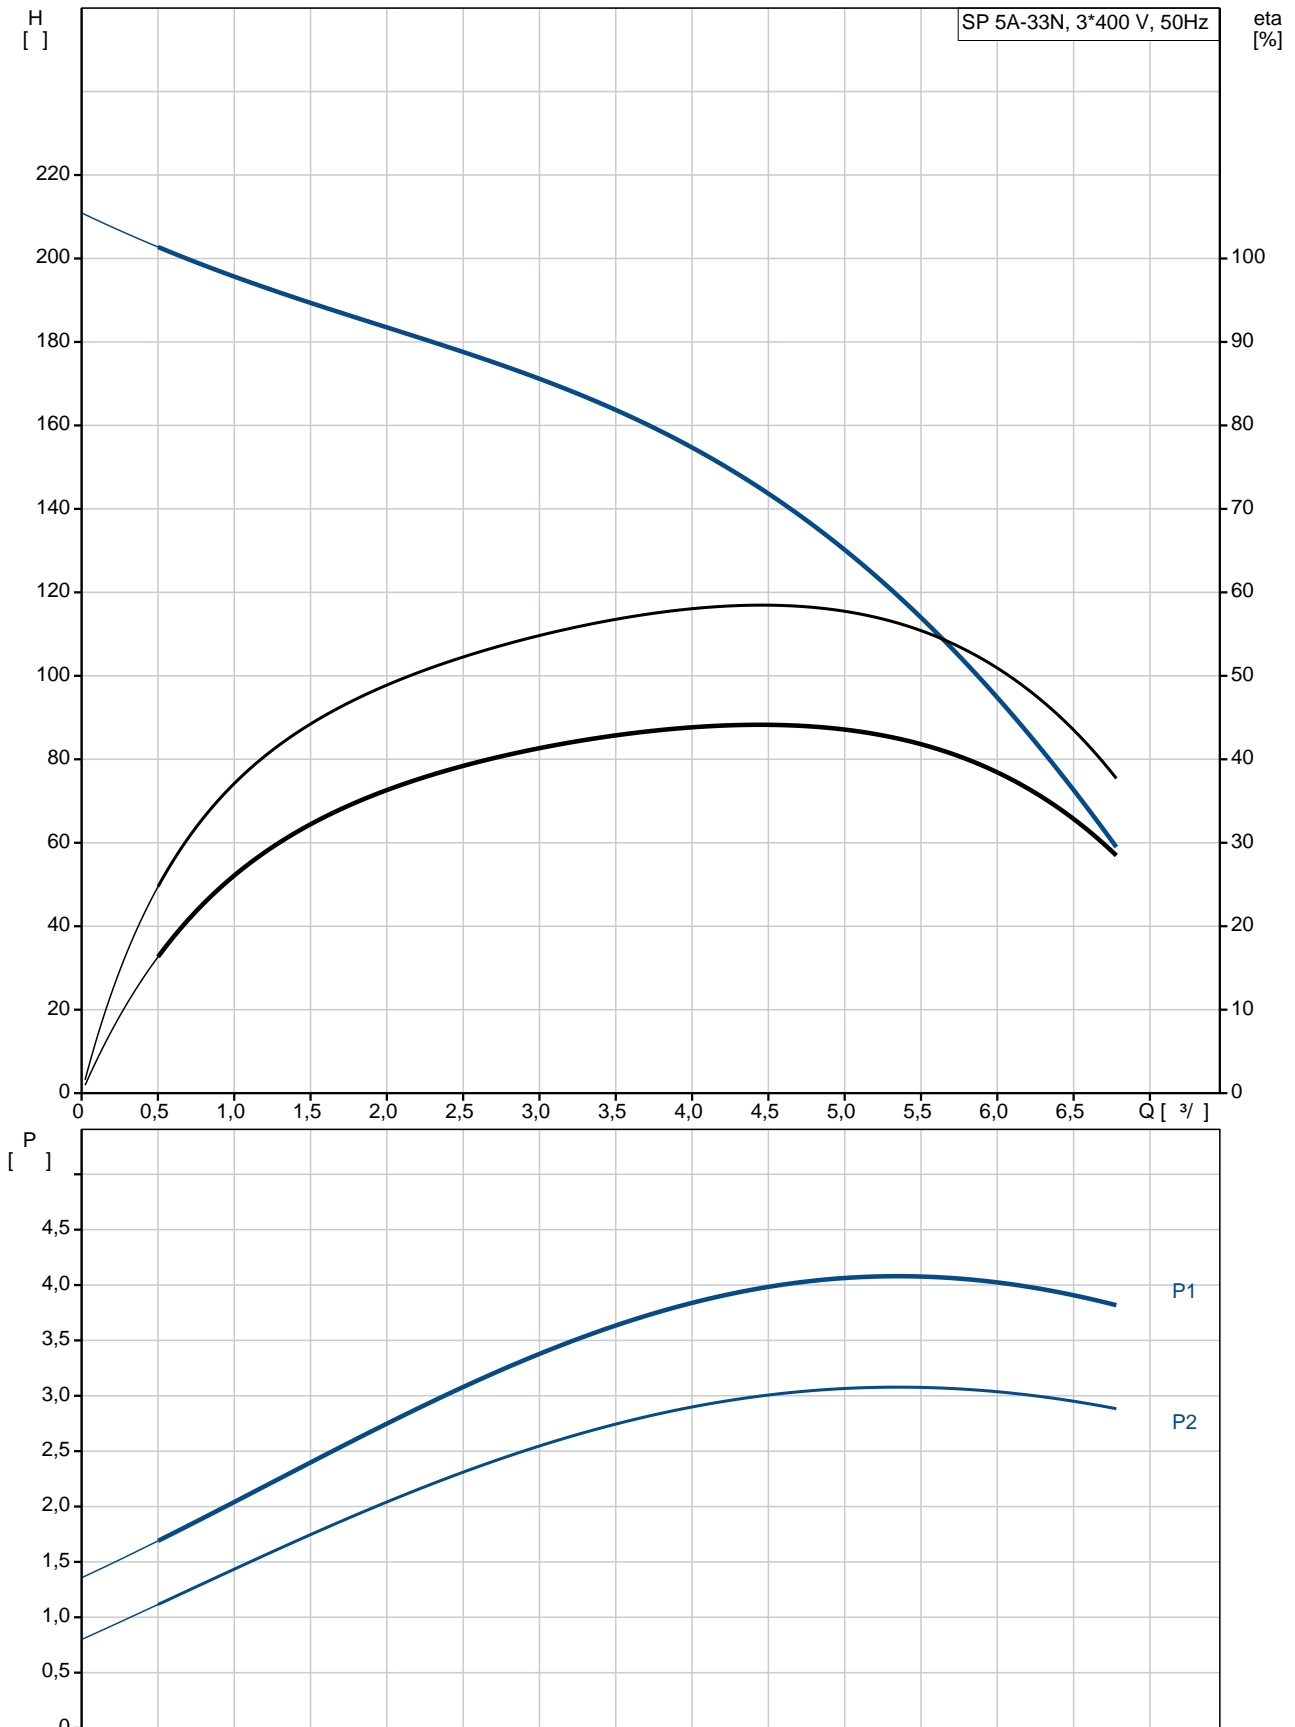

SP 5A-33N
 5201933
 EAN : 5708601059193
 2900 /
 5 3/
 135
 33
 NONE
 SIC/SIC
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 CYLINDRICAL

EN 1.4401
 AISI AISI 316

EN 1.4401
 AISI AISI 316

DIN W.-Nr. 1.4539
 AISI 904 L

Rp1 1/2
 4 inch

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS4000
 GRUNDFOS

- P2: 3





(2), 3

50 Hz
 3 x 380-400-415
 7.70-7.85-8.10 A
 460-490-500 %

Cos : 0.82-0.77-0.73
 2850-2865-2875 /


(IEC 34-5): IP68
 (IEC 85): F

79195608

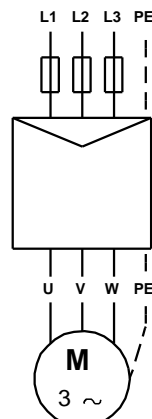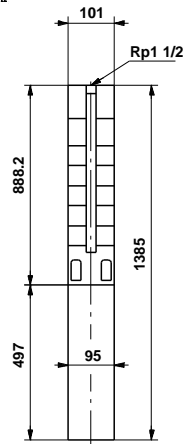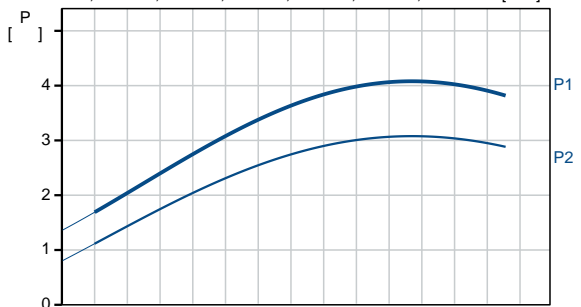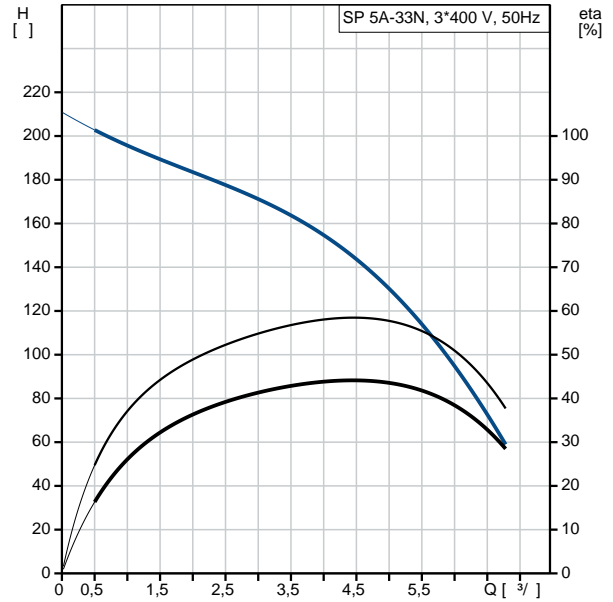


		MEI :	0.50
ErP	:	EuP	/ .
	:		30.2
	:		32
	:		66.8 ³
C	:	DK	
	:		8413702900

5201933 SP 5A-33N 50

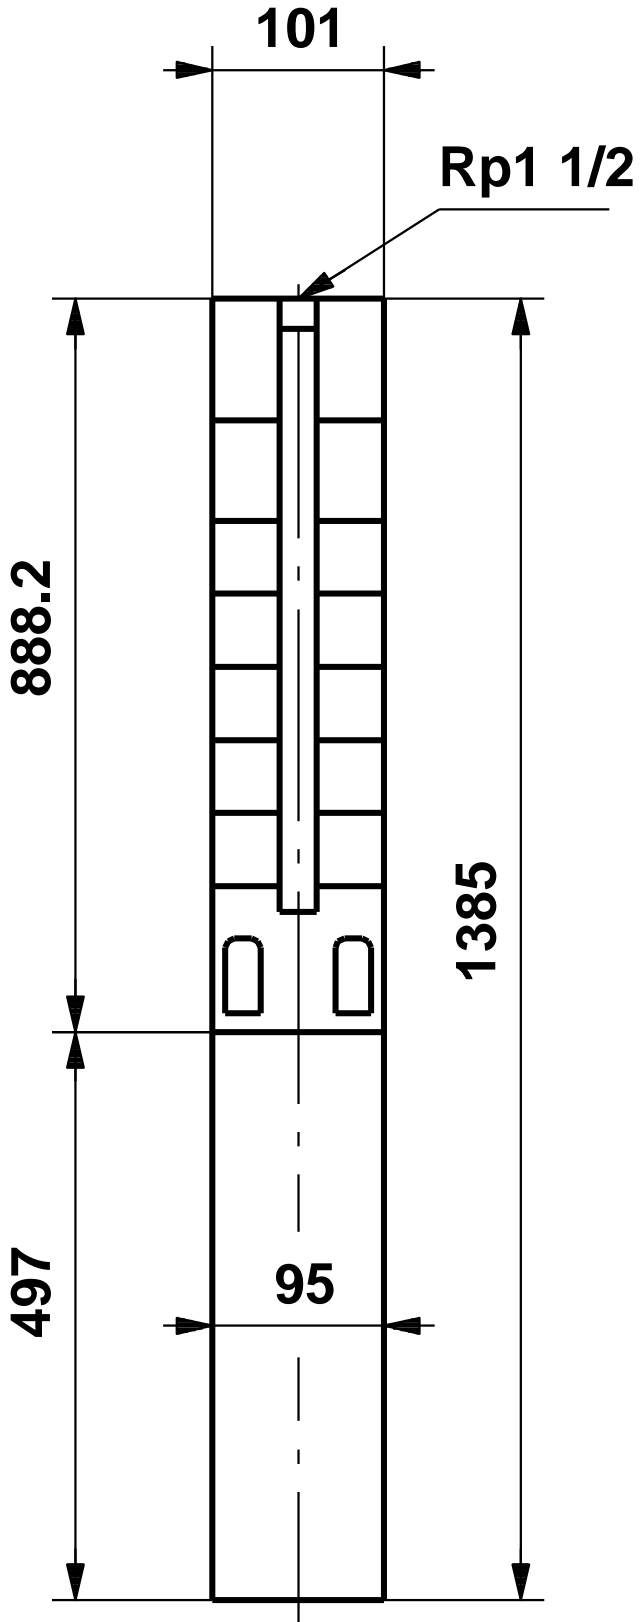

5201933 SP 5A-33N 50

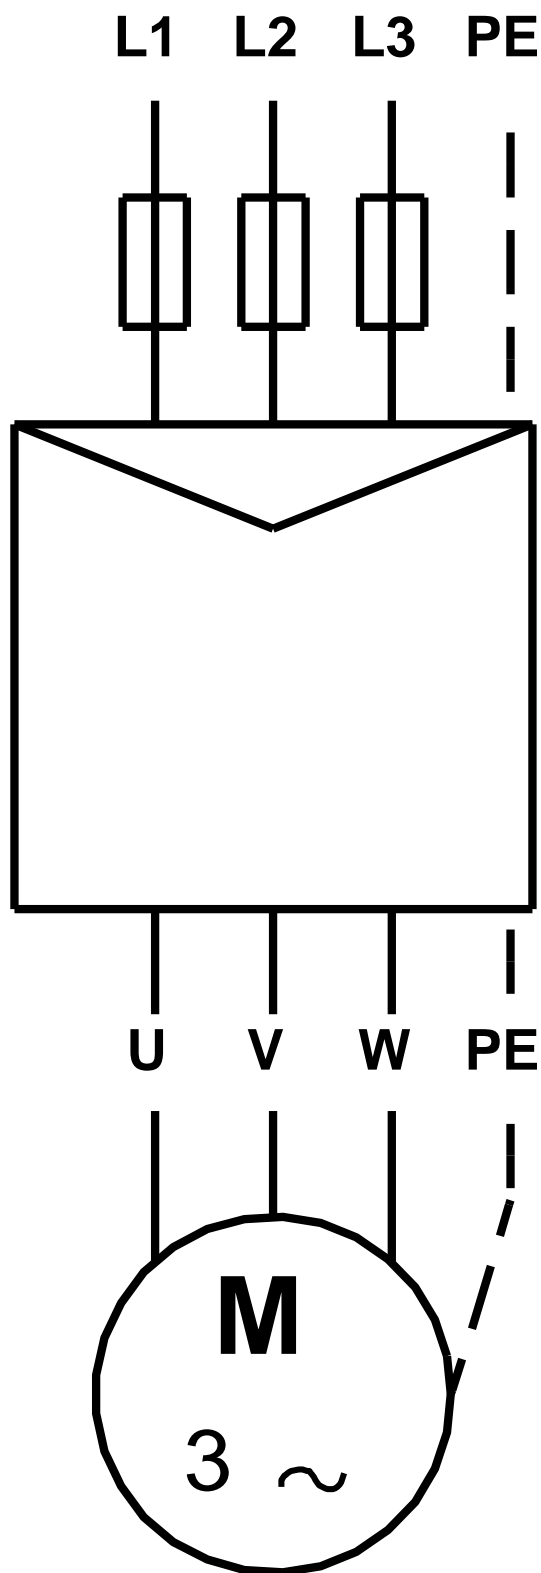

! [], .