

1 SP 5A-6N



: 5202106

, EN 1.4401 (AISI 316),
MS40002.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
25
: SIC/SIC
: CE,EAC
- : ISO9906:2012 3B
: T40
: CYLINDRICAL


EN 1.4401
AISI AISI 316

EN 1.4401
AISI AISI 316





DIN W.-Nr. 1.4539
AISI 904 L

: Rp1 1/2
 : 4 inch
 :
 : MS4000
 : CSCR
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 1 x 220-230
 : 14.6-14.0 A
 : 540-600 %
 Cos - : 0.96-0.96
 : 2850-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79214607
 :
 ErP : MEI : 0.50
 : EuP /
 : 25.8
 : 27.6
 : 16.3 ³

5202106 SP 5A-6N 50

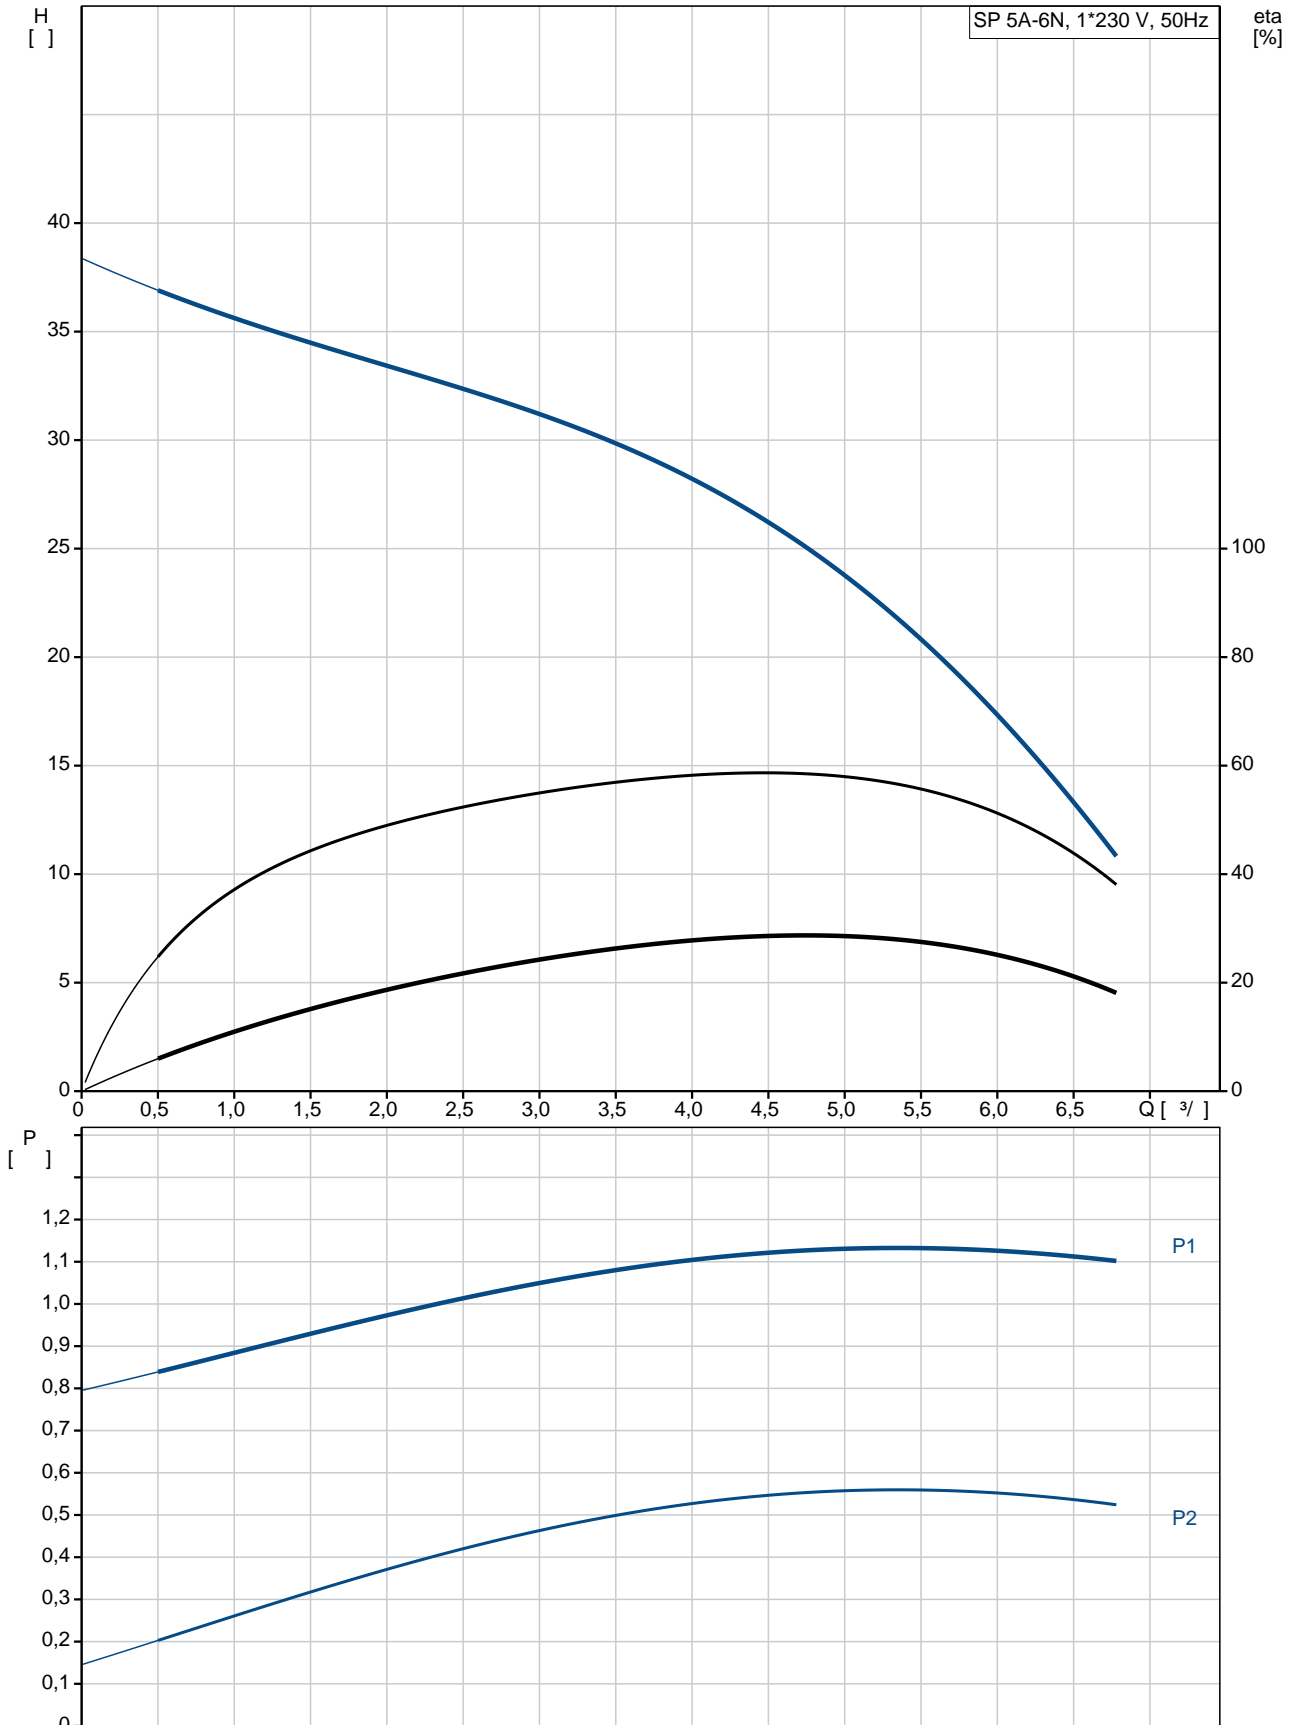


	SP 5A-6N
	5202106
EAN	5700390238278
	2900 /
	5 ^{3/}
	25
	6
	NONE
	SIC/SIC
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	CYLINDRICAL
	EN 1.4401
	AISI AISI 316
	EN 1.4401
	AISI AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS4000
	CSCR
	GRUNDFOS
- P2:	2.2
(2),	2.2
	50 Hz
	1 x 220-230
	14.6-14.0 A
	540-600 %
Cos	0.96-0.96
	2850-2870 /
(IEC 34-5):	IP68
(IEC 85):	F
	79214607

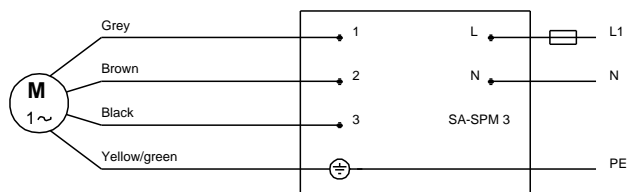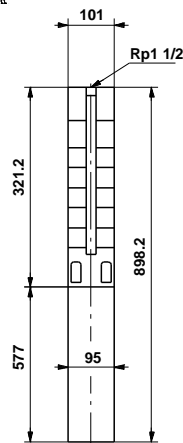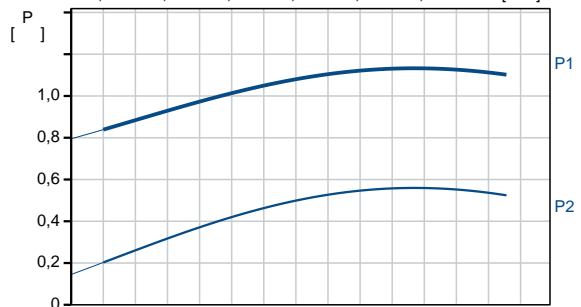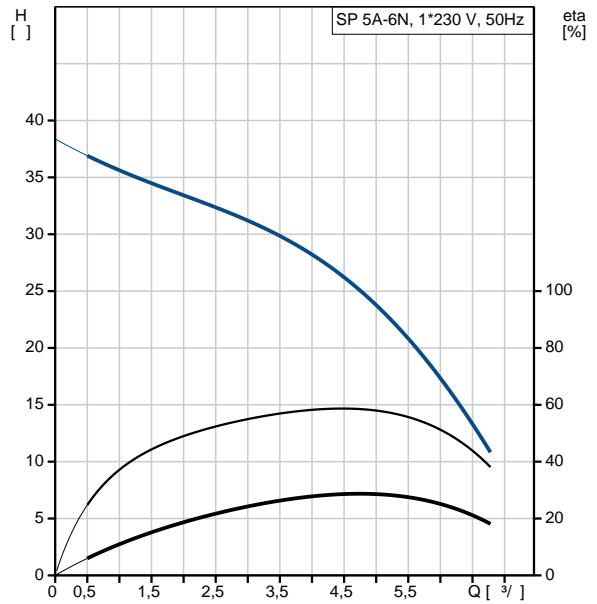

:	
MEI :	0.50
ErP :	EuP / .
:	25.8
:	27.6
:	16.3 ³

5202106 SP 5A-6N 50

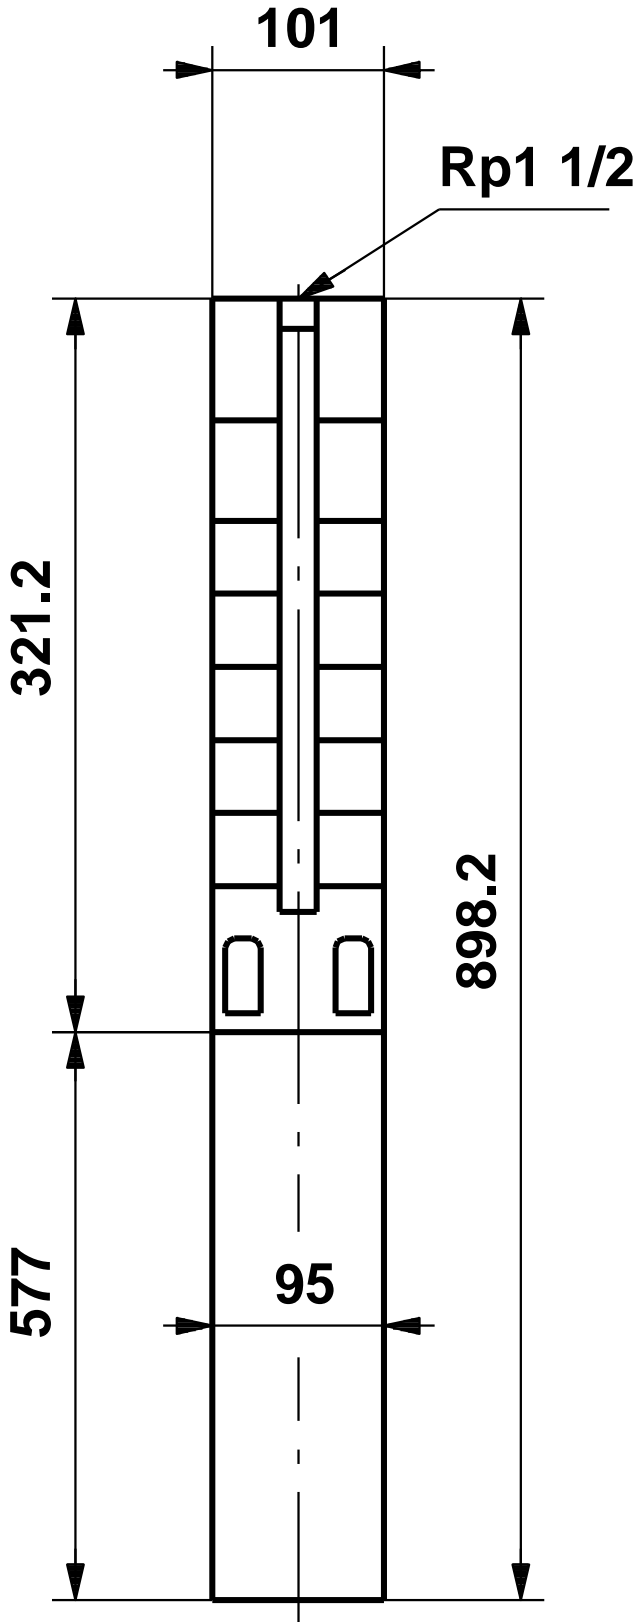

5202106 SP 5A-6N 50

