

1 SP 5A-12NE



: 5221912

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

0,15 / : 40 °C

: 20 °C

998.2 / ³

: 2900 /

5 ³/

49

: SIC/SIC

- : ISO9906:2012 3B

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

: Rp

: 1 1/2 inch

: 4 inch

: MS4000

- P2: 1.1

: 50 Hz


: 3 x 380-400-415

2.80-2.75-2.75 A





Cos - : 0.85-0.82-0.78

: 2850-2870-2880 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195405
:
MEI : 0.50
:
C : 19.2
: DK
: 8413702900


5221912 SP 5A-12NE 50

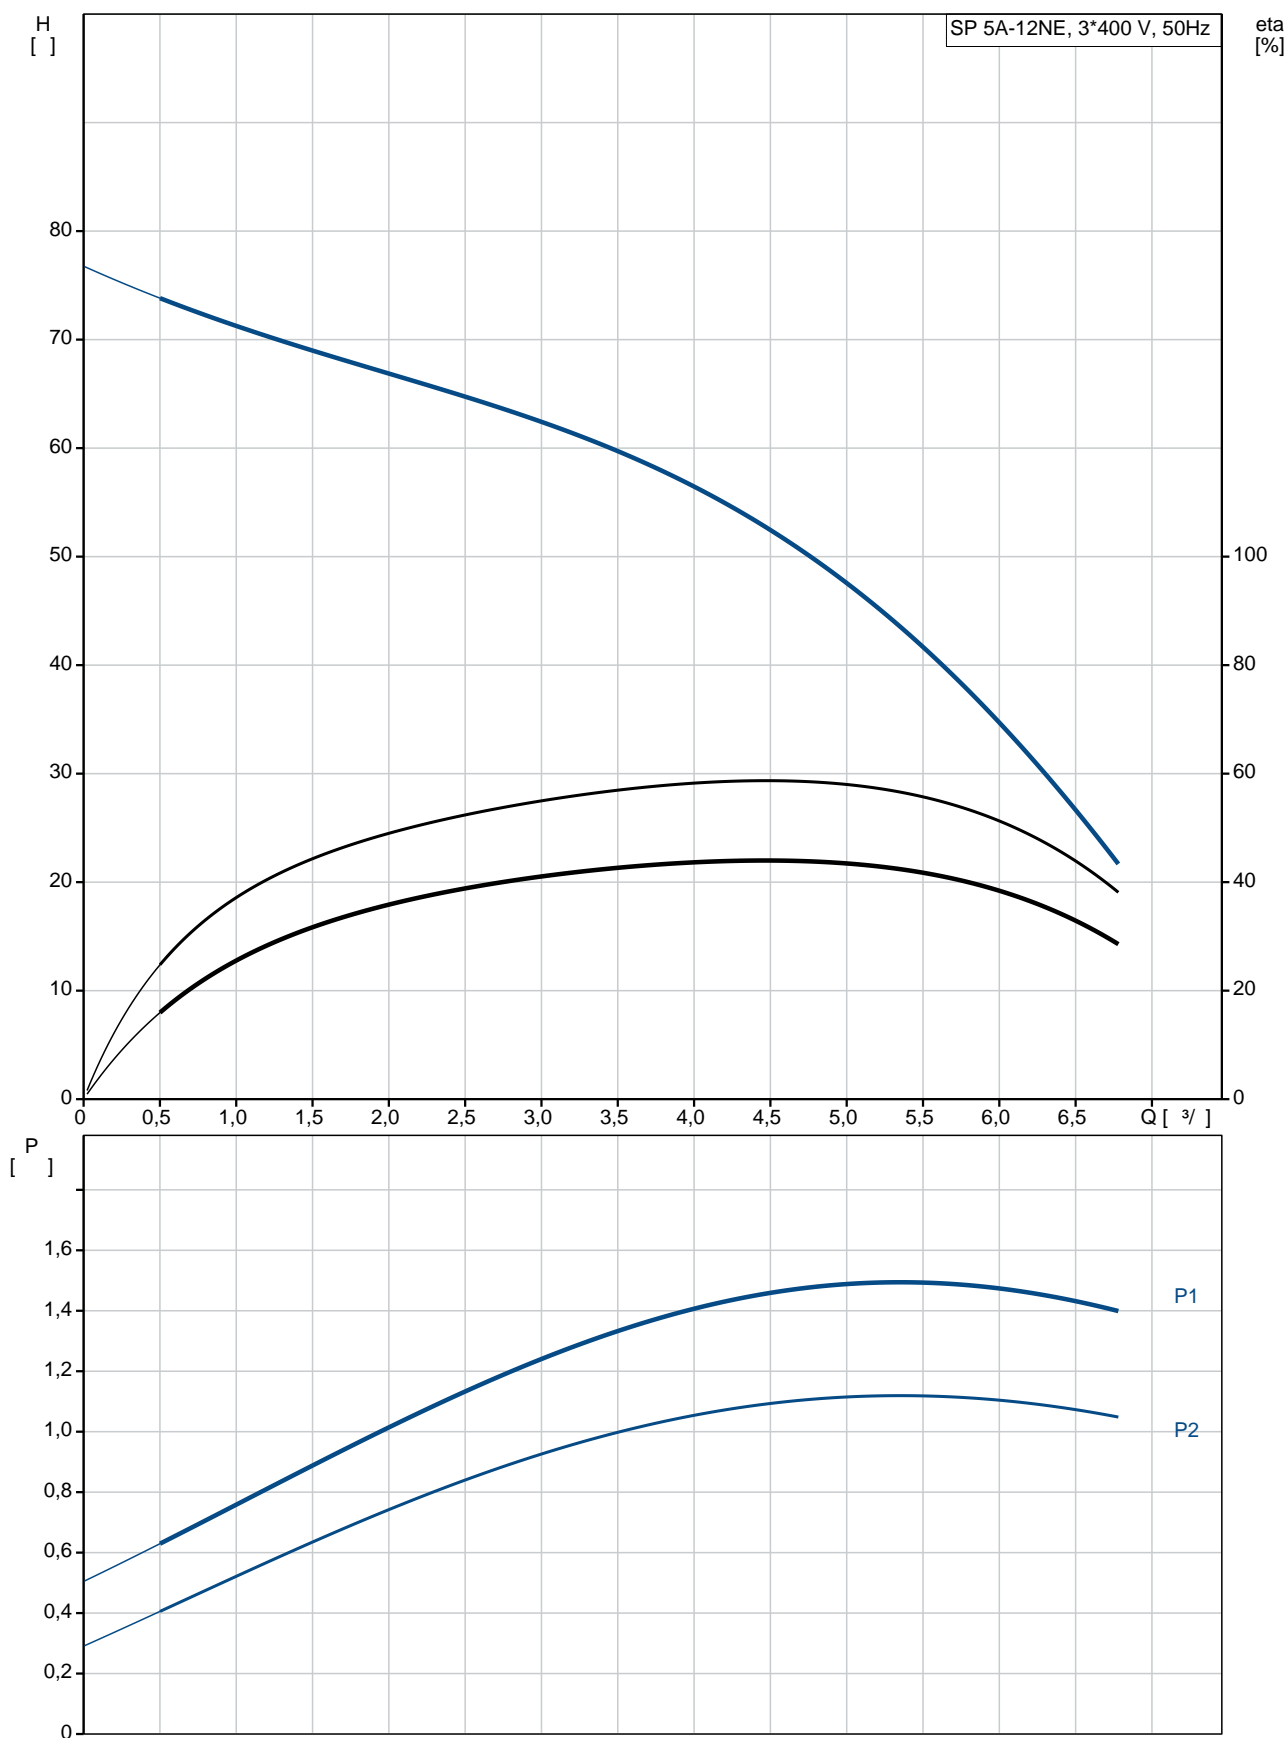

| | | |
|-----|-------------|-------------------|
| | | SP 5A-12NE |
| | | 5221912 |
| EAN | | 5700390241582 |
| | | 2900 / |
| | | 5 3/ |
| | | 49 |
| | | 12 |
| | | SIC/SIC |
| | | ISO9906:2012 3B |
| | | 05220012 |
| | | A |
| | | |
| | | DIN W.-Nr. 1.4401 |
| | | AISI 316 |
| | | |
| | | DIN W.-Nr. 1.4401 |
| | | AISI 316 |
| | | |
| | | DIN W.-Nr. 1.4539 |
| | | AISI 904 L |
| | | |
| | | Rp |
| | | 1 1/2 inch |
| | | 4 inch |
| | | |
| | | |
| t | 0,15 / | 40 °C |
| | | 20 °C |
| | | 998.2 / 3 |
| | | |
| | | MS4000 |
| | - P2: | 1.1 |
| | | 50 Hz |
| | | 3 x 380-400-415 |
| | | 2.80-2.75-2.75 A |
| Cos | | 0.85-0.82-0.78 |
| | | 2850-2870-2880 / |
| | | |
| | | |
| | (IEC 34-5): | IP68 |
| | (IEC 85): | F |
| | | |
| | | |
| | | 79195405 |
| | | |
| MEI | | 0.50 |
| | | 19.2 |
| C | | DK |
| | | 8413702900 |

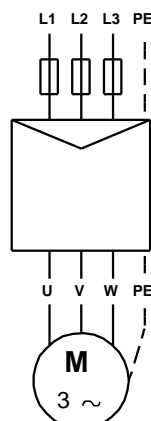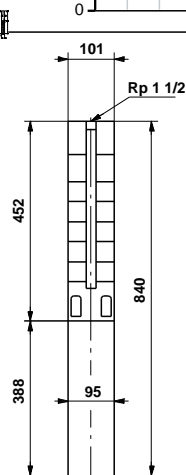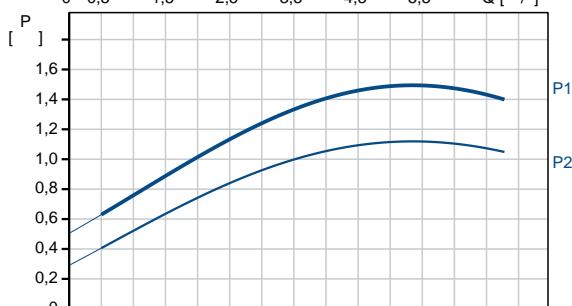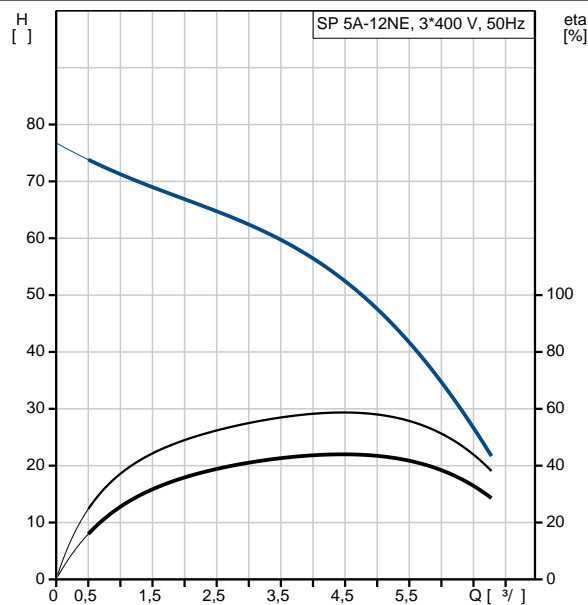

5221912 SP 5A-12NE 50

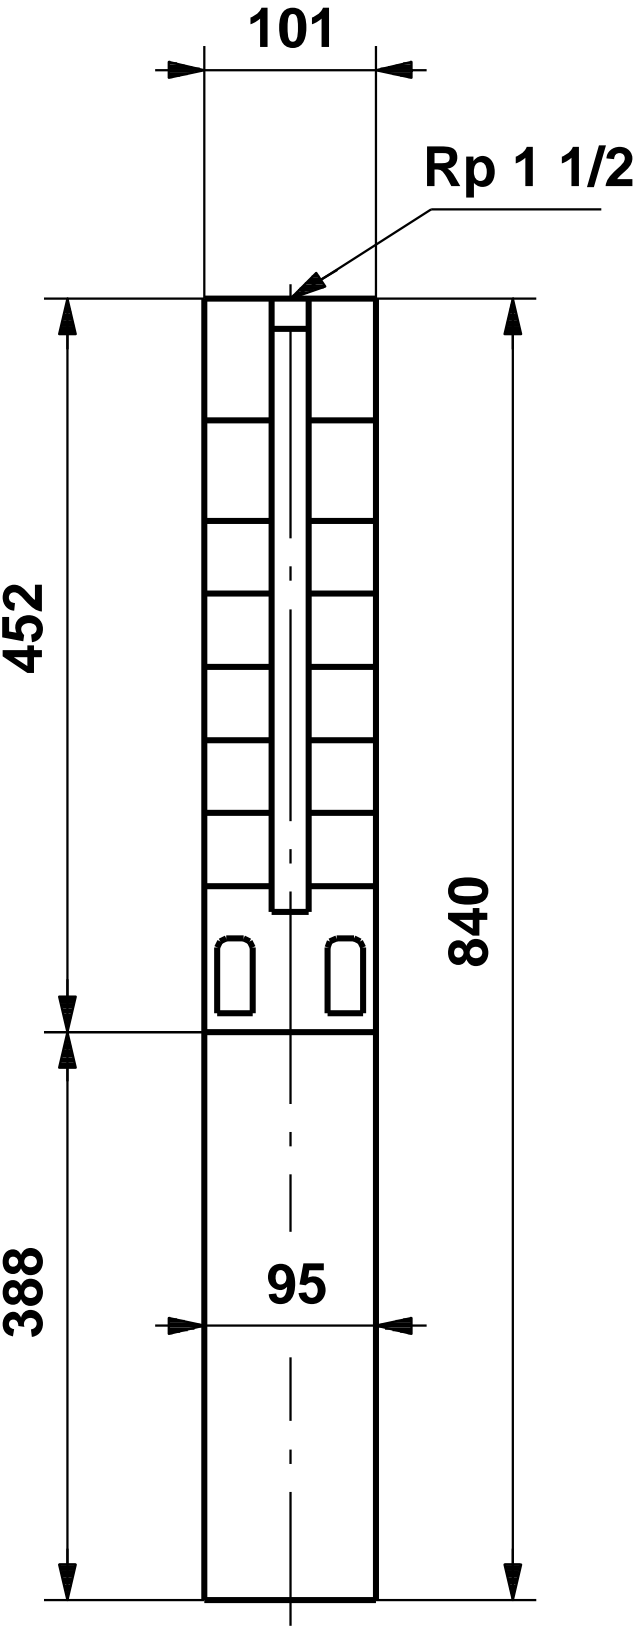

5221912 SP 5A-12NE 50

