

1 SP 5A-17NE



: 5221917

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

. t : 0,15 / : 40 °C

: 20 °C

998.2 / ³

: 2900 /

5 ^{3/}

70

: SIC/SIC

- : ISO9906:2012 3B

DIN W.-Nr. 1.4401

AISI 316

DIN W.-Nr. 1.4401

AISI 316

DIN W.-Nr. 1.4539

AISI 904 L

: Rp

: 1 1/2 inch

: 4 inch

: MS4000

- P2: 1.5

: 50 Hz



: 3 x 380-400-415

3.95-4.00-4.10 A





Cos - : 0.84-0.78-0.74

: 2840-2860-2870 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195406
:
: MEI : 0.50
: 22.8
C : DK
: 8413702900


5221917 SP 5A-17NE 50

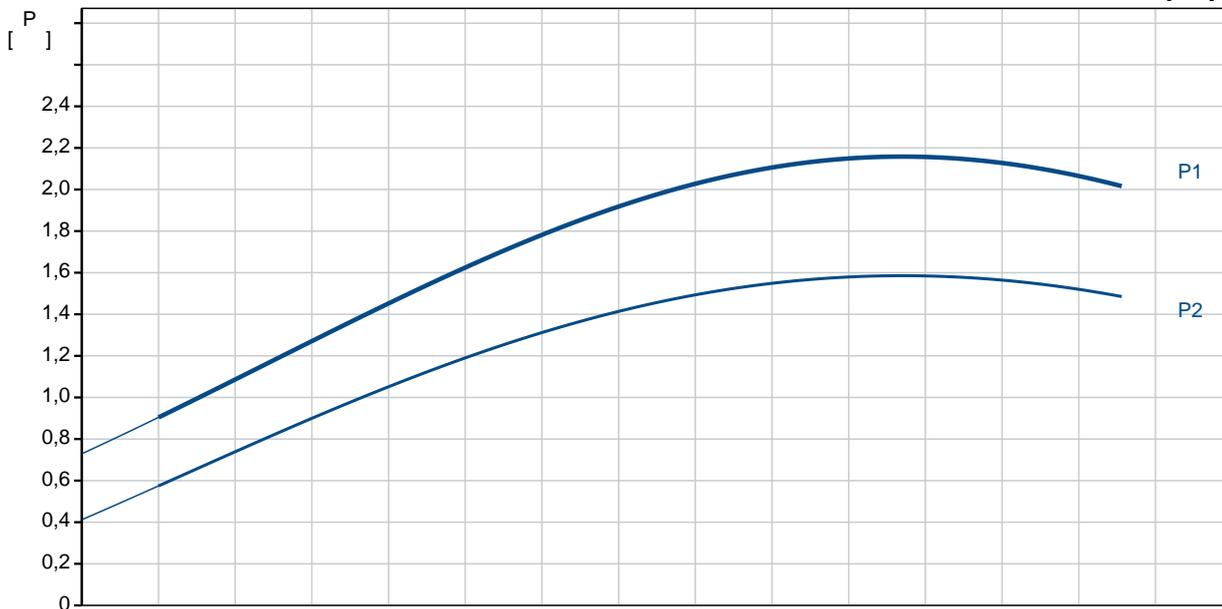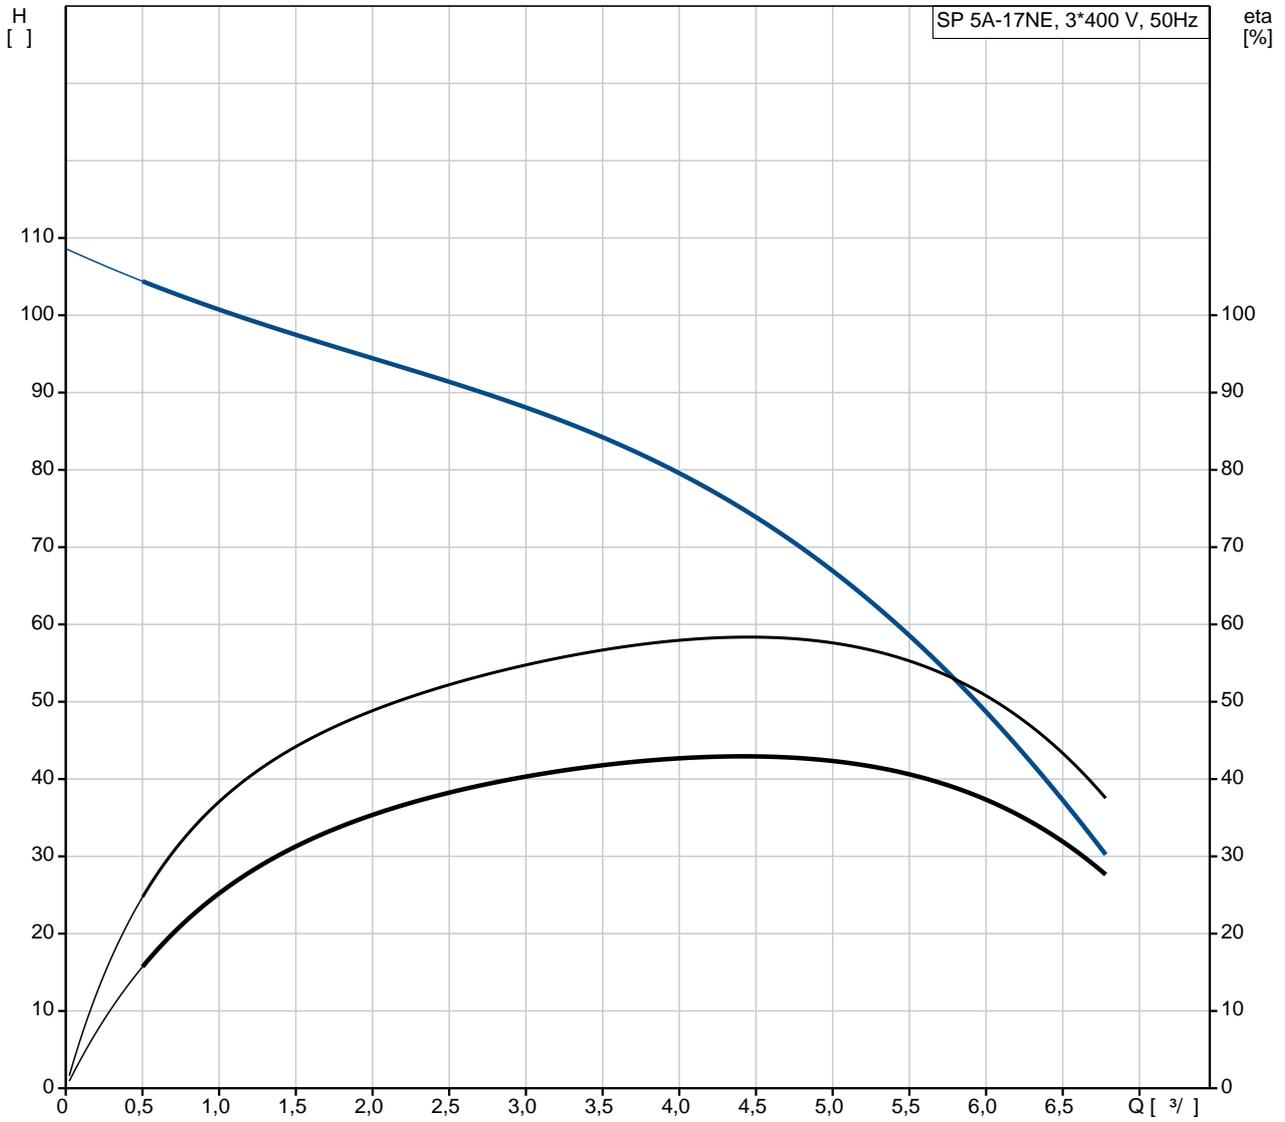


| | |
|-----|----------------------|
| | SP 5A-17NE |
| | 5221917 |
| EAN | 5700390241636 |
| | 2900 / |
| | 5 ^{3/} |
| | 70 |
| | 17 |
| | SIC/SIC |
| | ISO9906:2012 3B |
| | 05220017 |
| | A |
| | DIN W.-Nr. 1.4401 |
| | AISI 316 |
| | DIN W.-Nr. 1.4401 |
| | AISI 316 |
| | DIN W.-Nr. 1.4539 |
| | AISI 904 L |
| | Rp |
| | 1 1/2 inch |
| | 4 inch |
| t | 0,15 / |
| | 40 °C |
| | 20 °C |
| | 998.2 / ³ |
| | MS4000 |
| | - P2: 1.5 |
| | 50 Hz |
| | 3 x 380-400-415 |
| | 3.95-4.00-4.10 A |
| Cos | 0.84-0.78-0.74 |
| | 2840-2860-2870 / |
| | (IEC 34-5): IP68 |
| | (IEC 85): F |
| | 79195406 |
| MEI | 0.50 |
| | 22.8 |
| C | DK |
| | 8413702900 |

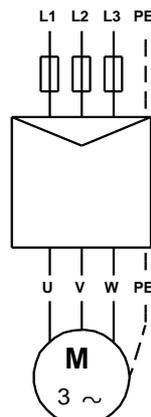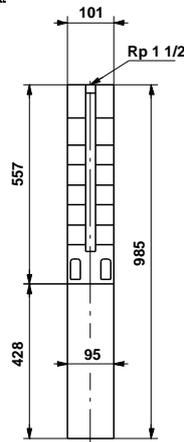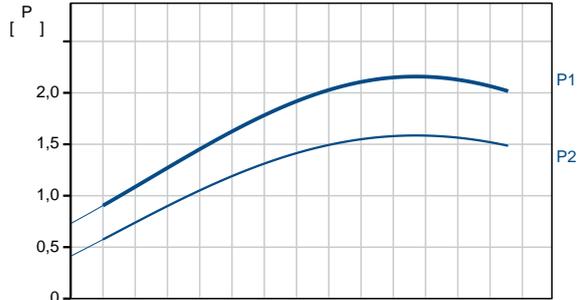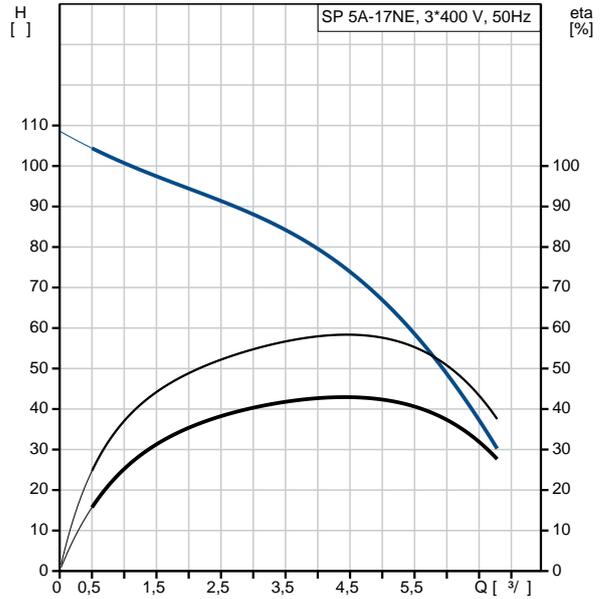

5221917 SP 5A-17NE 50

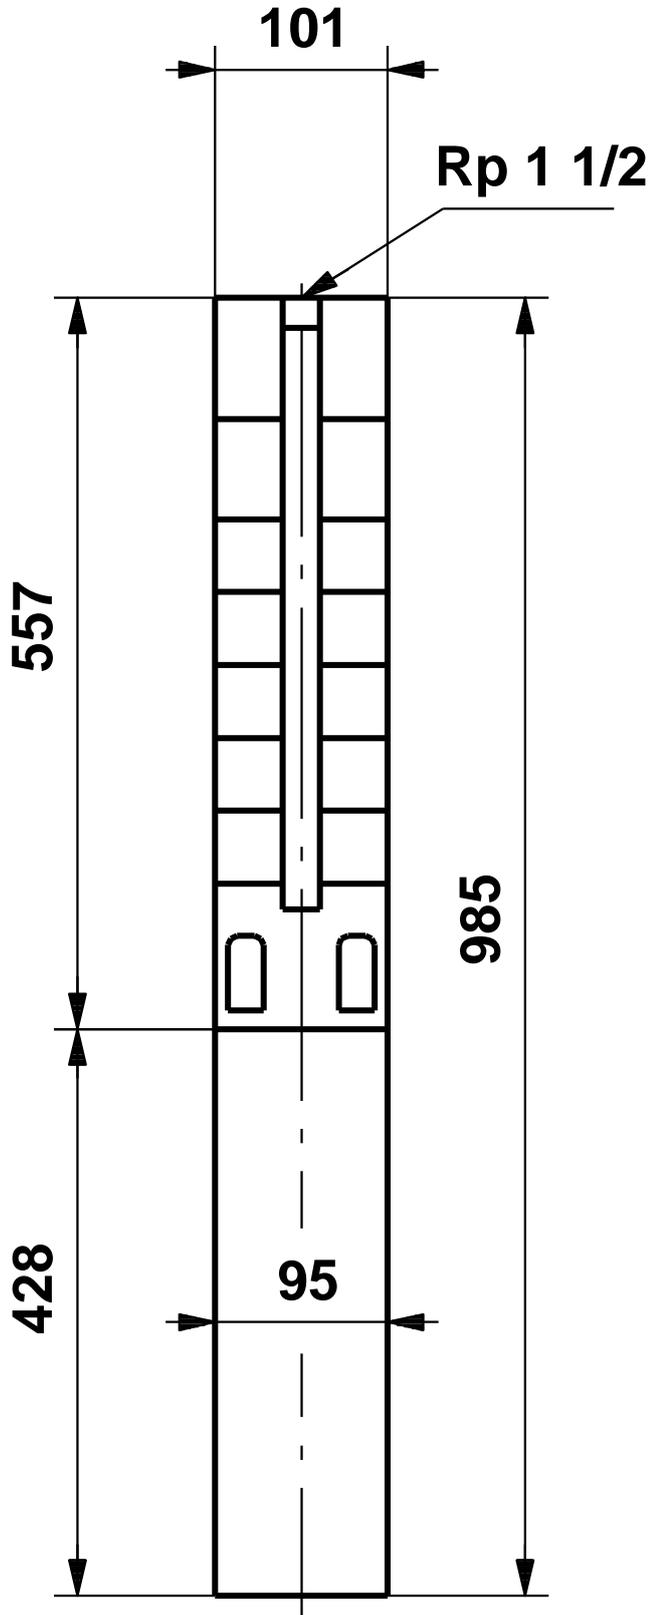

5221917 SP 5A-17NE 50

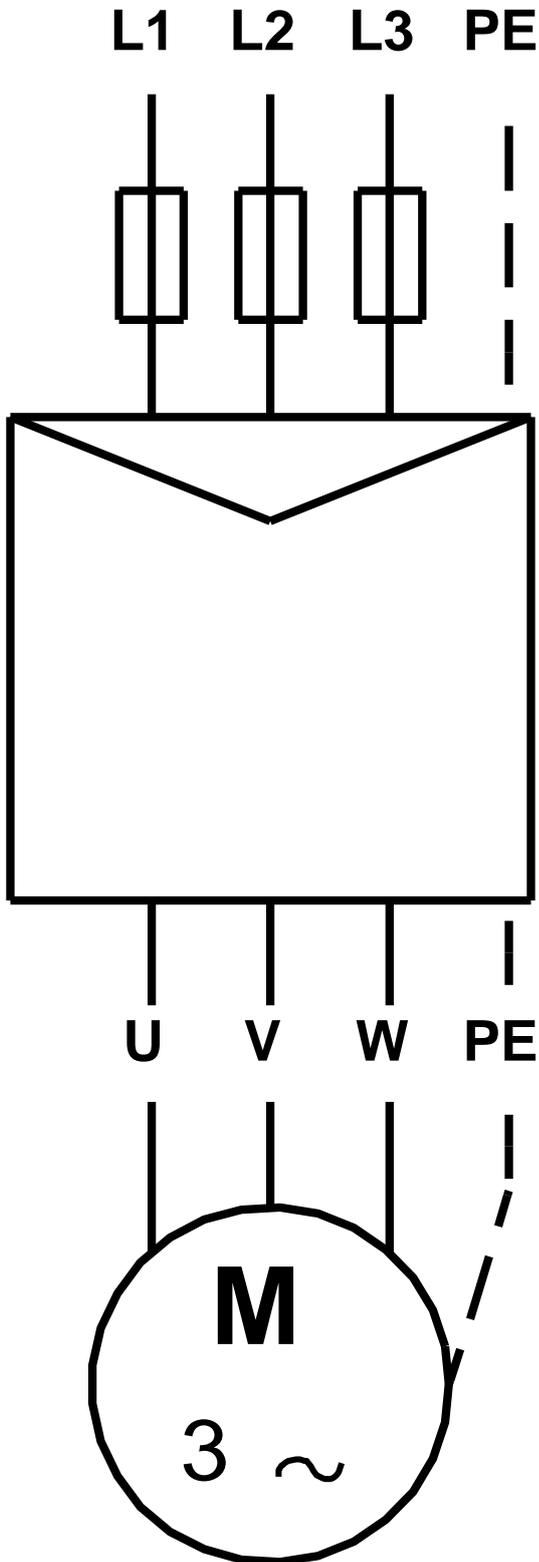

! [], .