

1 SP 5A-21NE



: 5221921

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

. t : 0,15 / : 40 °C
: : 20 °C
: 998.2 / ³

: 2900 /

: 5 ^{3/}
: 86

: SIC/SIC
- : ISO9906:2012 3B

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

: Rp
: 1 1/2 inch
: 4 inch

: MS4000

- P2: 2.2

: 50 Hz



: 3 x 380-400-415

5.75-6.00-6.30 A





Cos - : 0.82-0.76-0.71

: 2840-2860-2870 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195407
:
MEI : 0.50
:
C : 27.8
: DK
: 8413702900


5221921 SP 5A-21NE 50

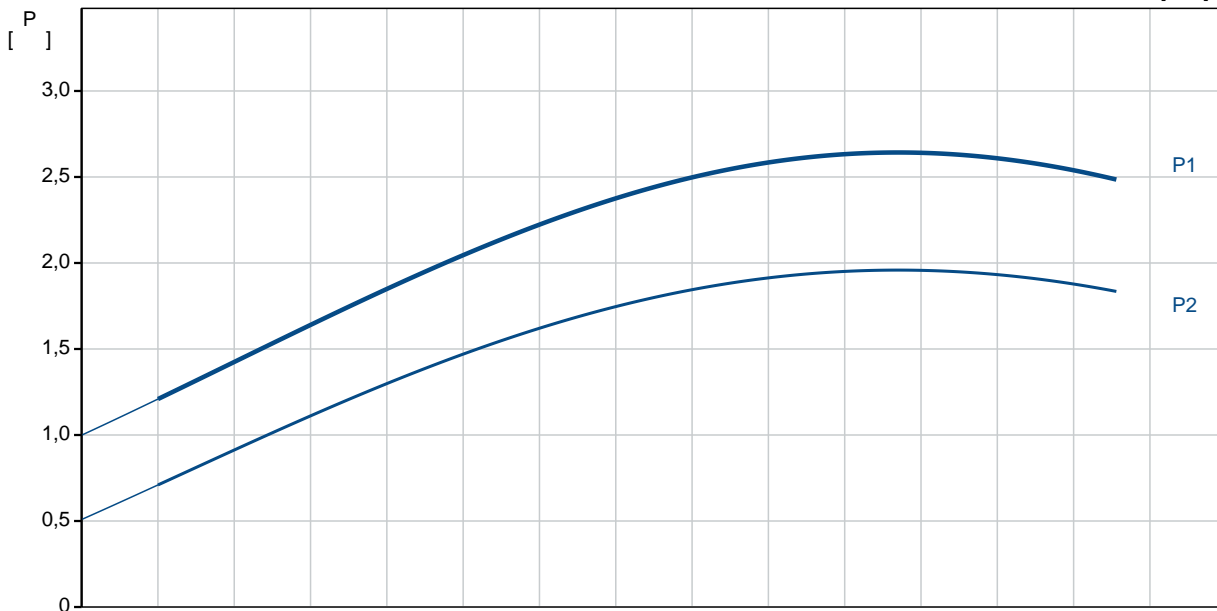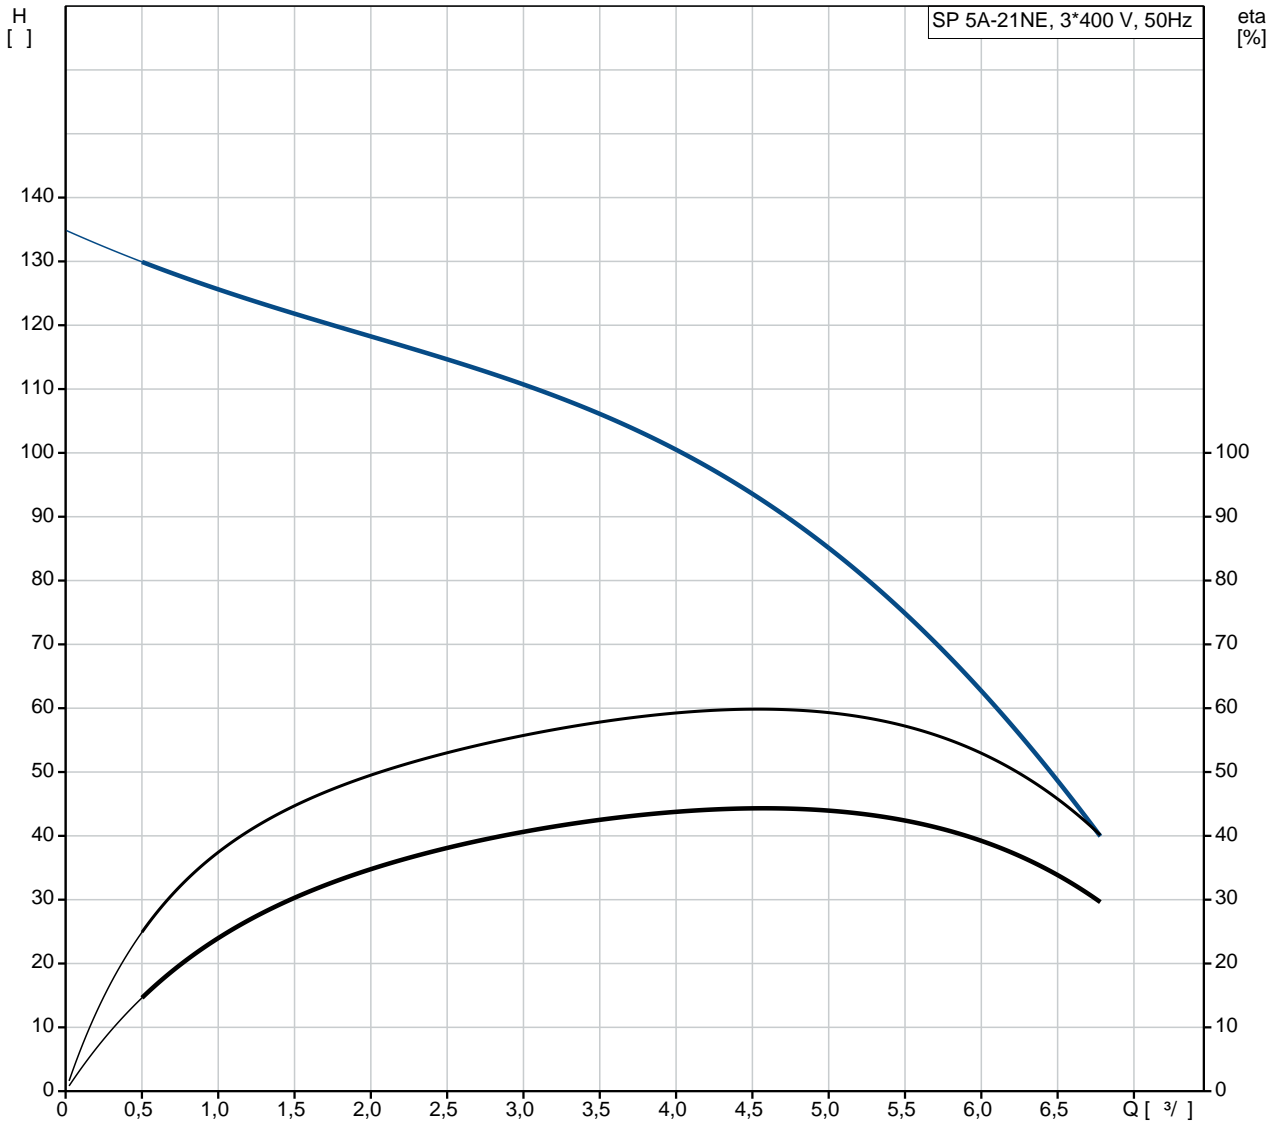


	SP 5A-21NE
	5221921
EAN	5700390241667
	2900 /
	5 ^{3/}
	86
	21
	SIC/SIC
	ISO9906:2012 3B
	05220021
	A
	DIN W.-Nr. 1.4401
	AISI 316
	DIN W.-Nr. 1.4401
	AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp
	1 1/2 inch
	4 inch
t	0,15 /
	40 °C
	20 °C
	998.2 / ³
	MS4000
	- P2:
	2.2
	50 Hz
	3 x 380-400-415
	5.75-6.00-6.30 A
Cos	0.82-0.76-0.71
	2840-2860-2870 /
	(IEC 34-5): IP68
	(IEC 85): F
	79195407
MEI	0.50
	27.8
C	DK
	8413702900

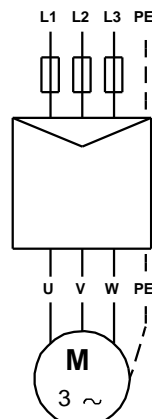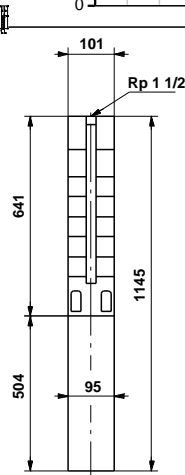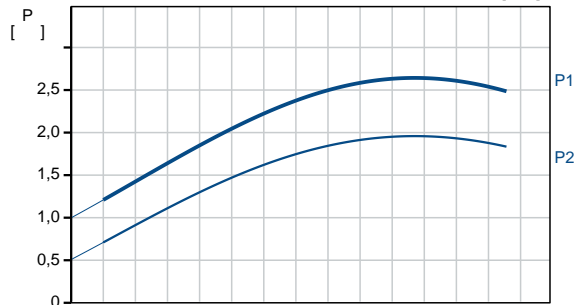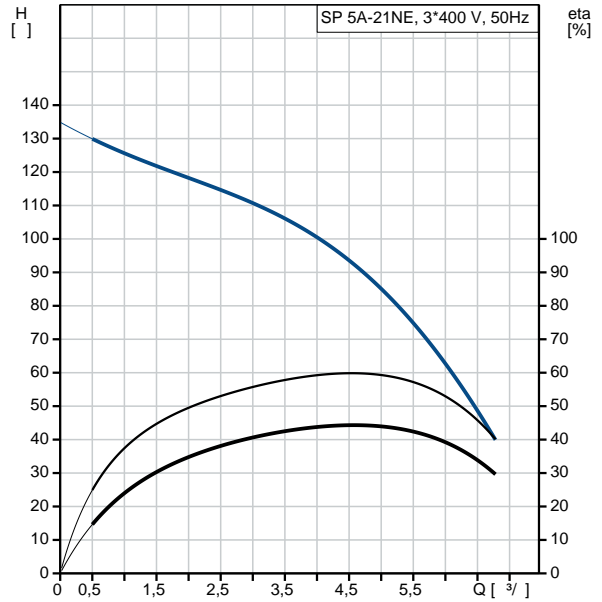

5221921 SP 5A-21NE 50

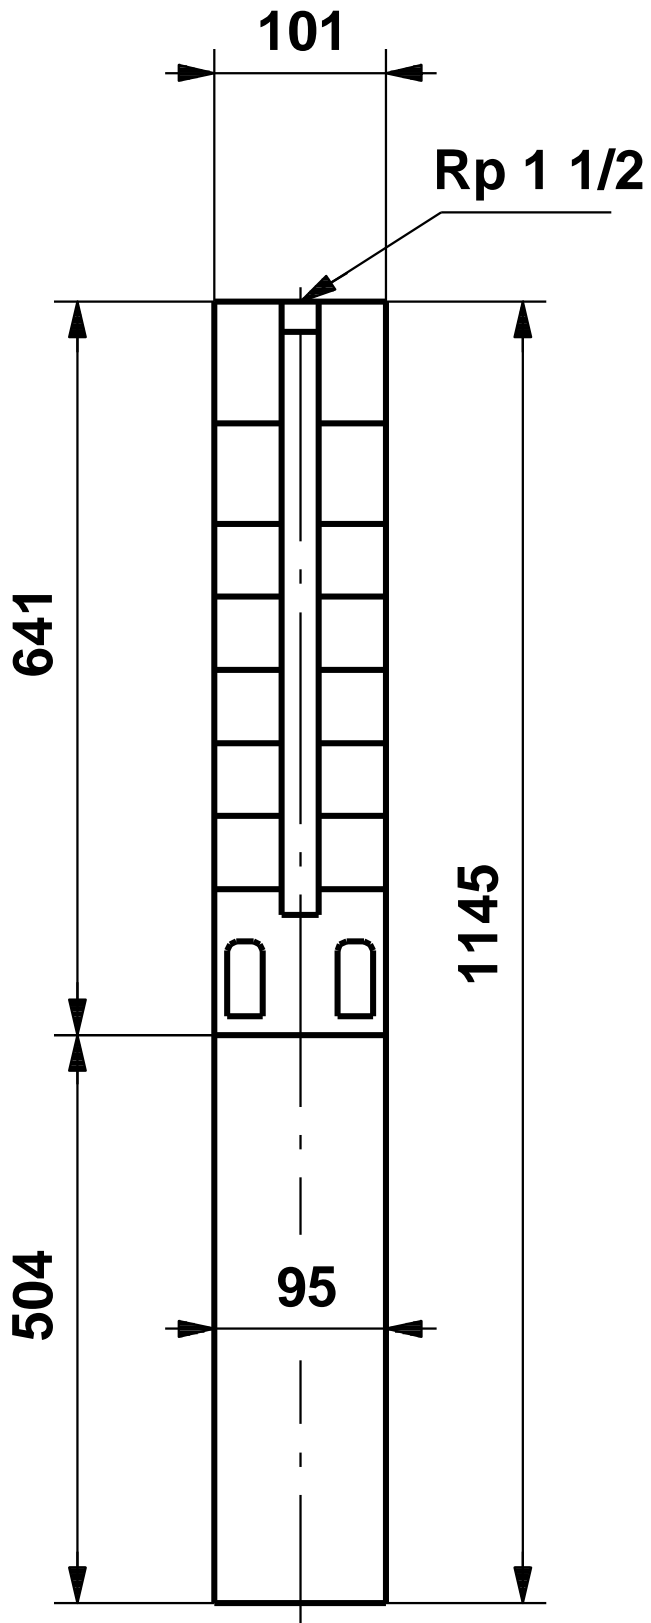

5221921 SP 5A-21NE 50

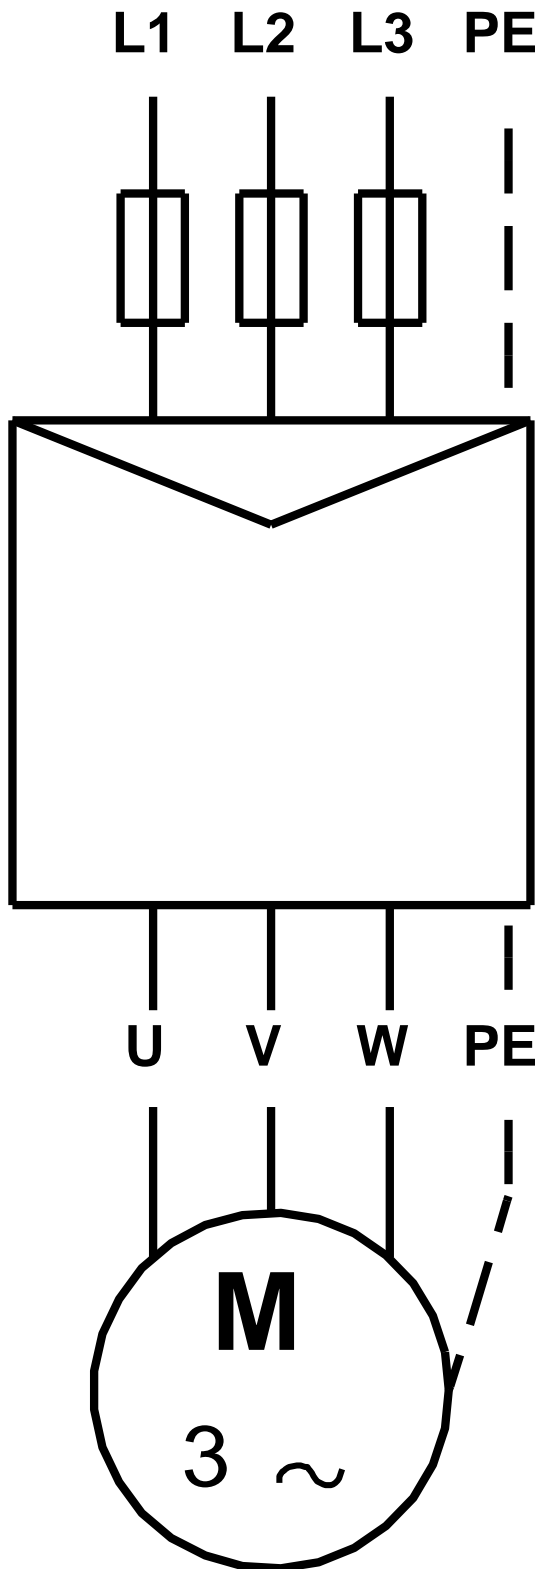

! [], .