

1 SP 5A-25NE



: 5221925

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

. t : 0,15 / : 40 °C
: : 20 °C
: 998.2 / ³

: 2900 /

: 5 ^{3/}
: 102
: SIC/SIC
- : ISO9906:2012 3B

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4539
AISI 904 L


: Rp
: 1 1/2 inch
: 4 inch

: MS4000
- P2: 2.2
: 50 Hz
: 3 x 380-400-415
: 5.75-6.00-6.30 A





Cos - : 0.82-0.76-0.71

: 2840-2860-2870 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195407
:
: MEI : 0.50
: 29.2
C : DK
: 8413702900


5221925 SP 5A-25NE 50

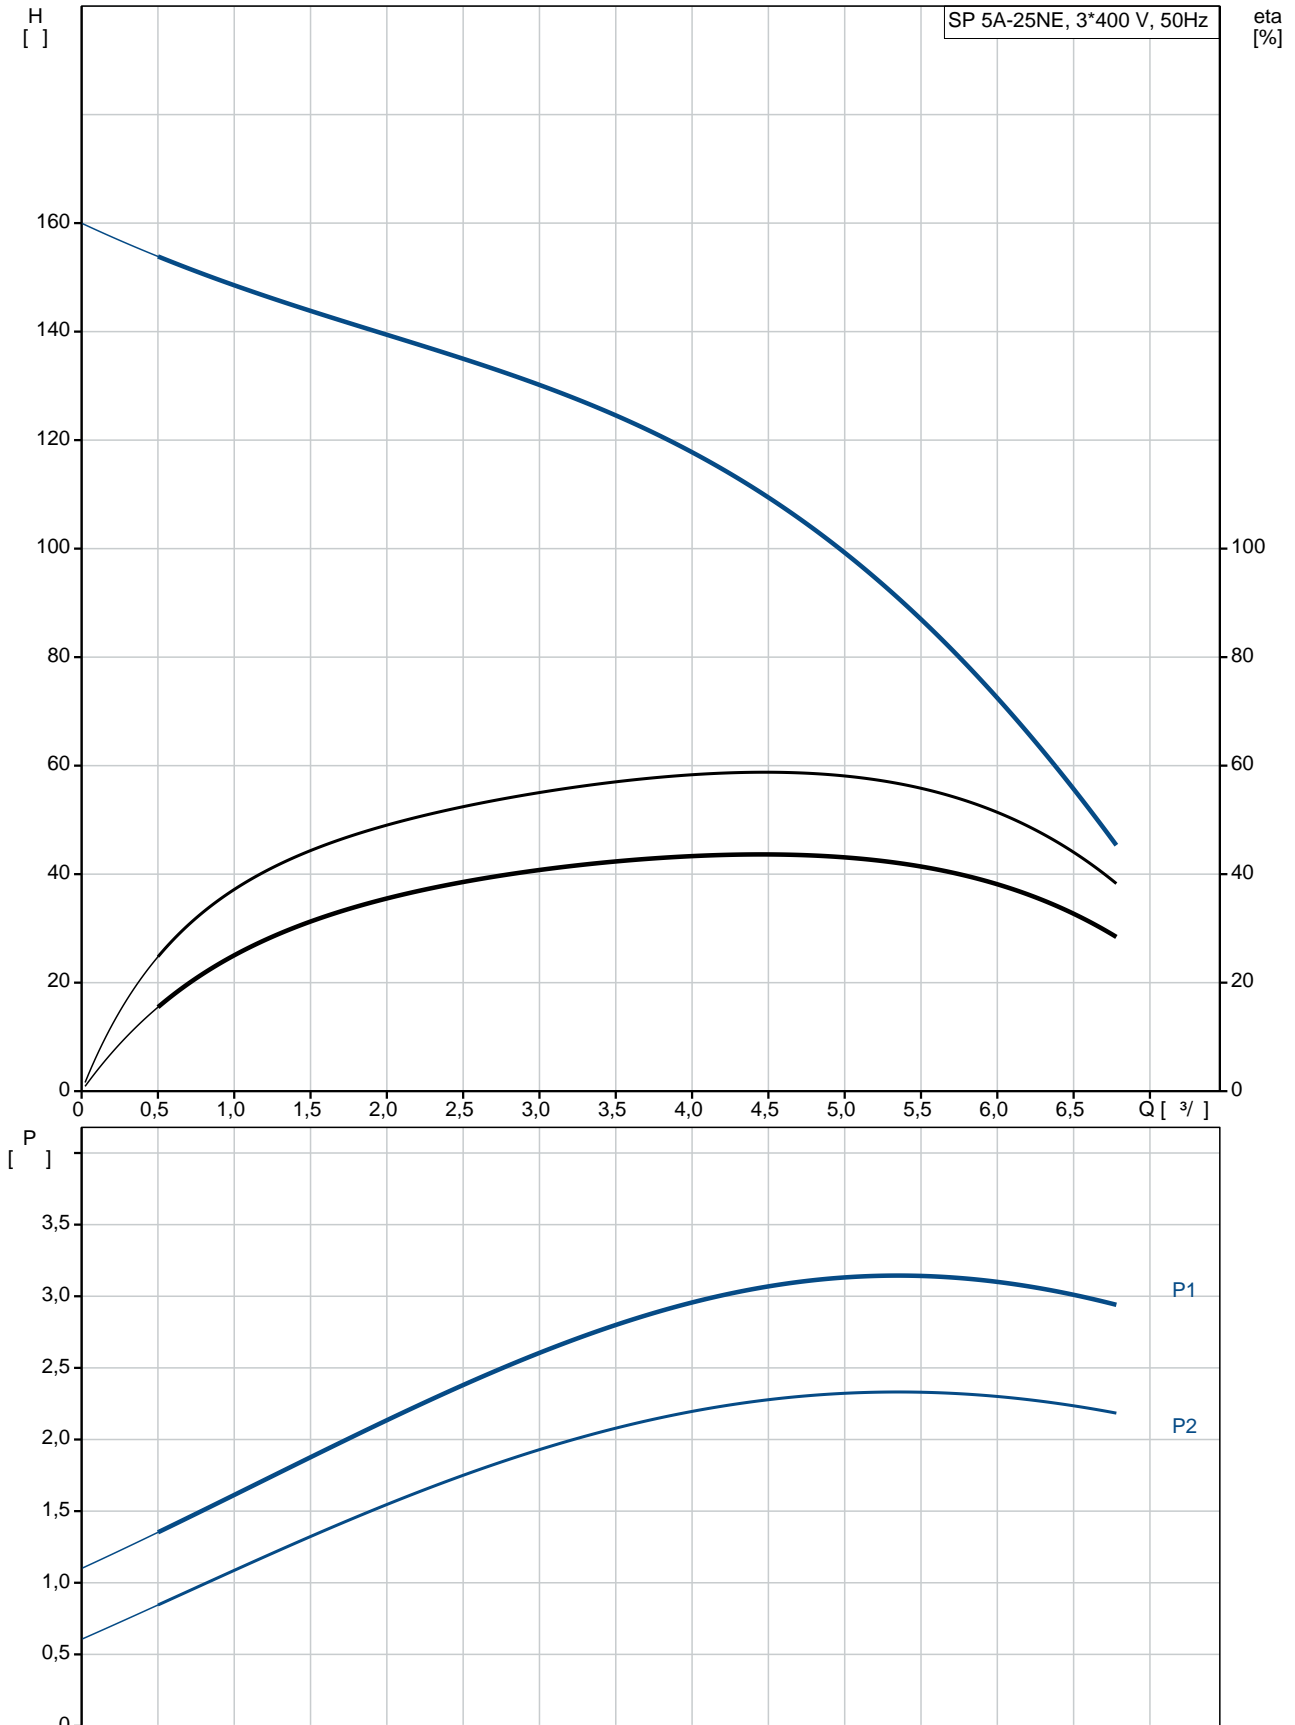


		SP 5A-25NE
		5221925
EAN		5700390241704
		2900 /
		5 ^{3/}
		102
		25
		SIC/SIC
		ISO9906:2012 3B
		05220025
		A
		DIN W.-Nr. 1.4401
		AISI 316
		DIN W.-Nr. 1.4401
		AISI 316
		DIN W.-Nr. 1.4539
		AISI 904 L
		Rp
		1 1/2 inch
		4 inch
t	0,15 /	40 °C
		20 °C
		998.2 / ³
		MS4000
		- P2: 2.2
		50 Hz
		3 x 380-400-415
		5.75-6.00-6.30 A
Cos		0.82-0.76-0.71
		2840-2860-2870 /
		(IEC 34-5): IP68
		(IEC 85): F
		79195407
MEI		0.50
		29.2
C		DK
		8413702900

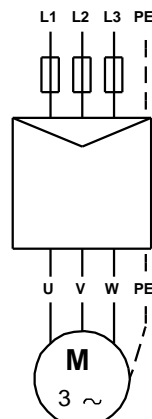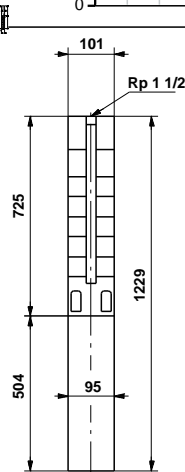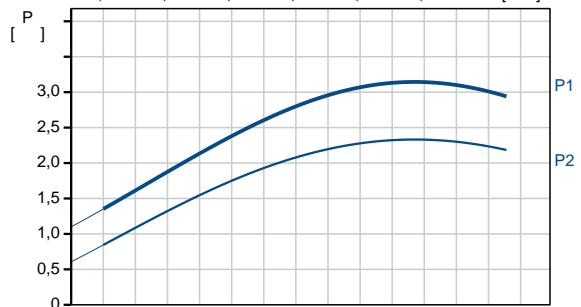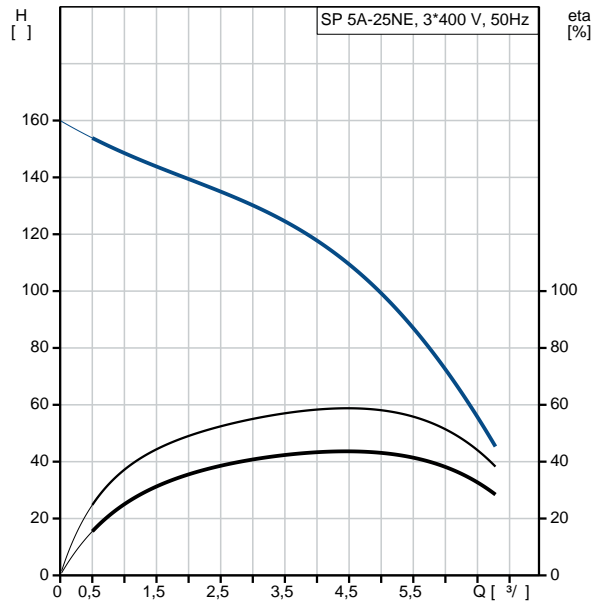

5221925 SP 5A-25NE 50

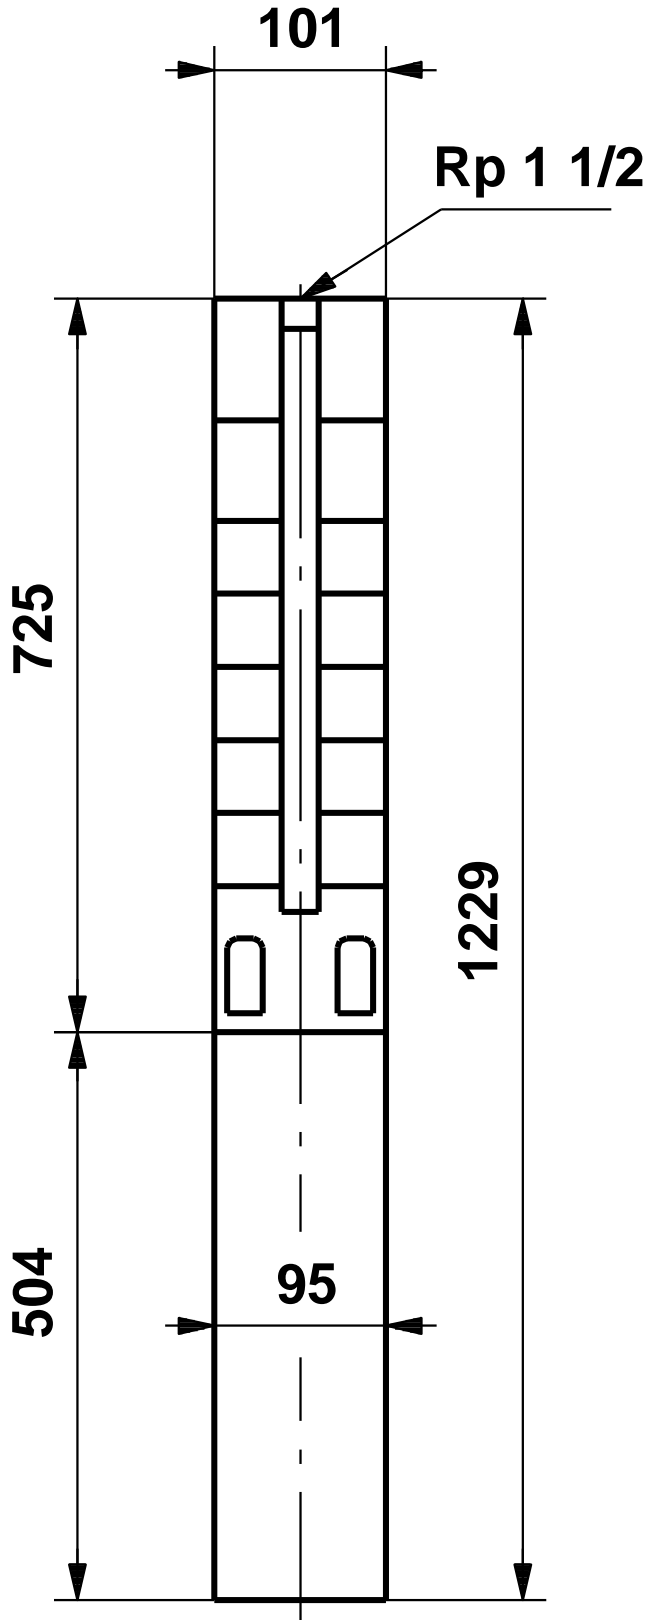

5221925 SP 5A-25NE 50

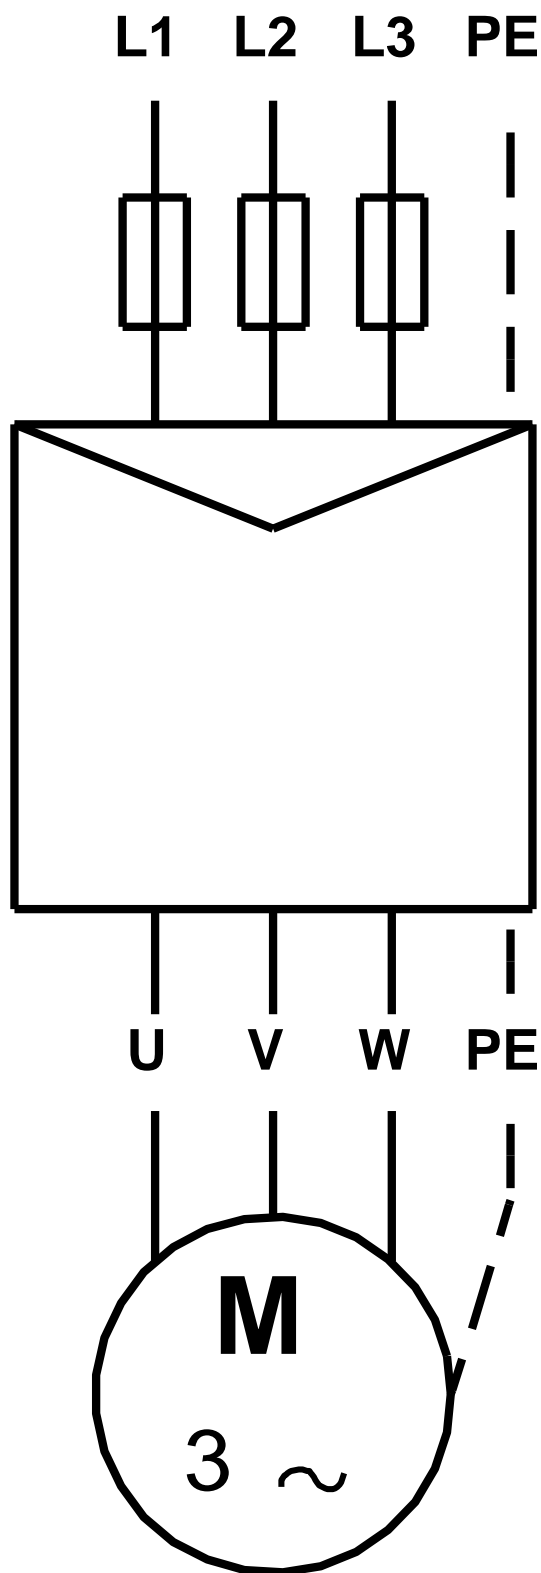

! [], .