

1 UP 20-15 N 150



: 59641500

, PES/PP.

: 2 .. 110 °C
: 60 °C
983.2 / 3

TF : 95
: CE,VDE,EAC,WEEE


DIN W.-Nr. 1.4301
AISI 304
, PES/PP

.T : - 80 0C: 80 °C





: 10
: G 1 1/4
: PN 10
: 150

: : 65
: 50 Hz
: 1 x 230
3: 0.28 A


59641500 UP 20-15 N 150 50

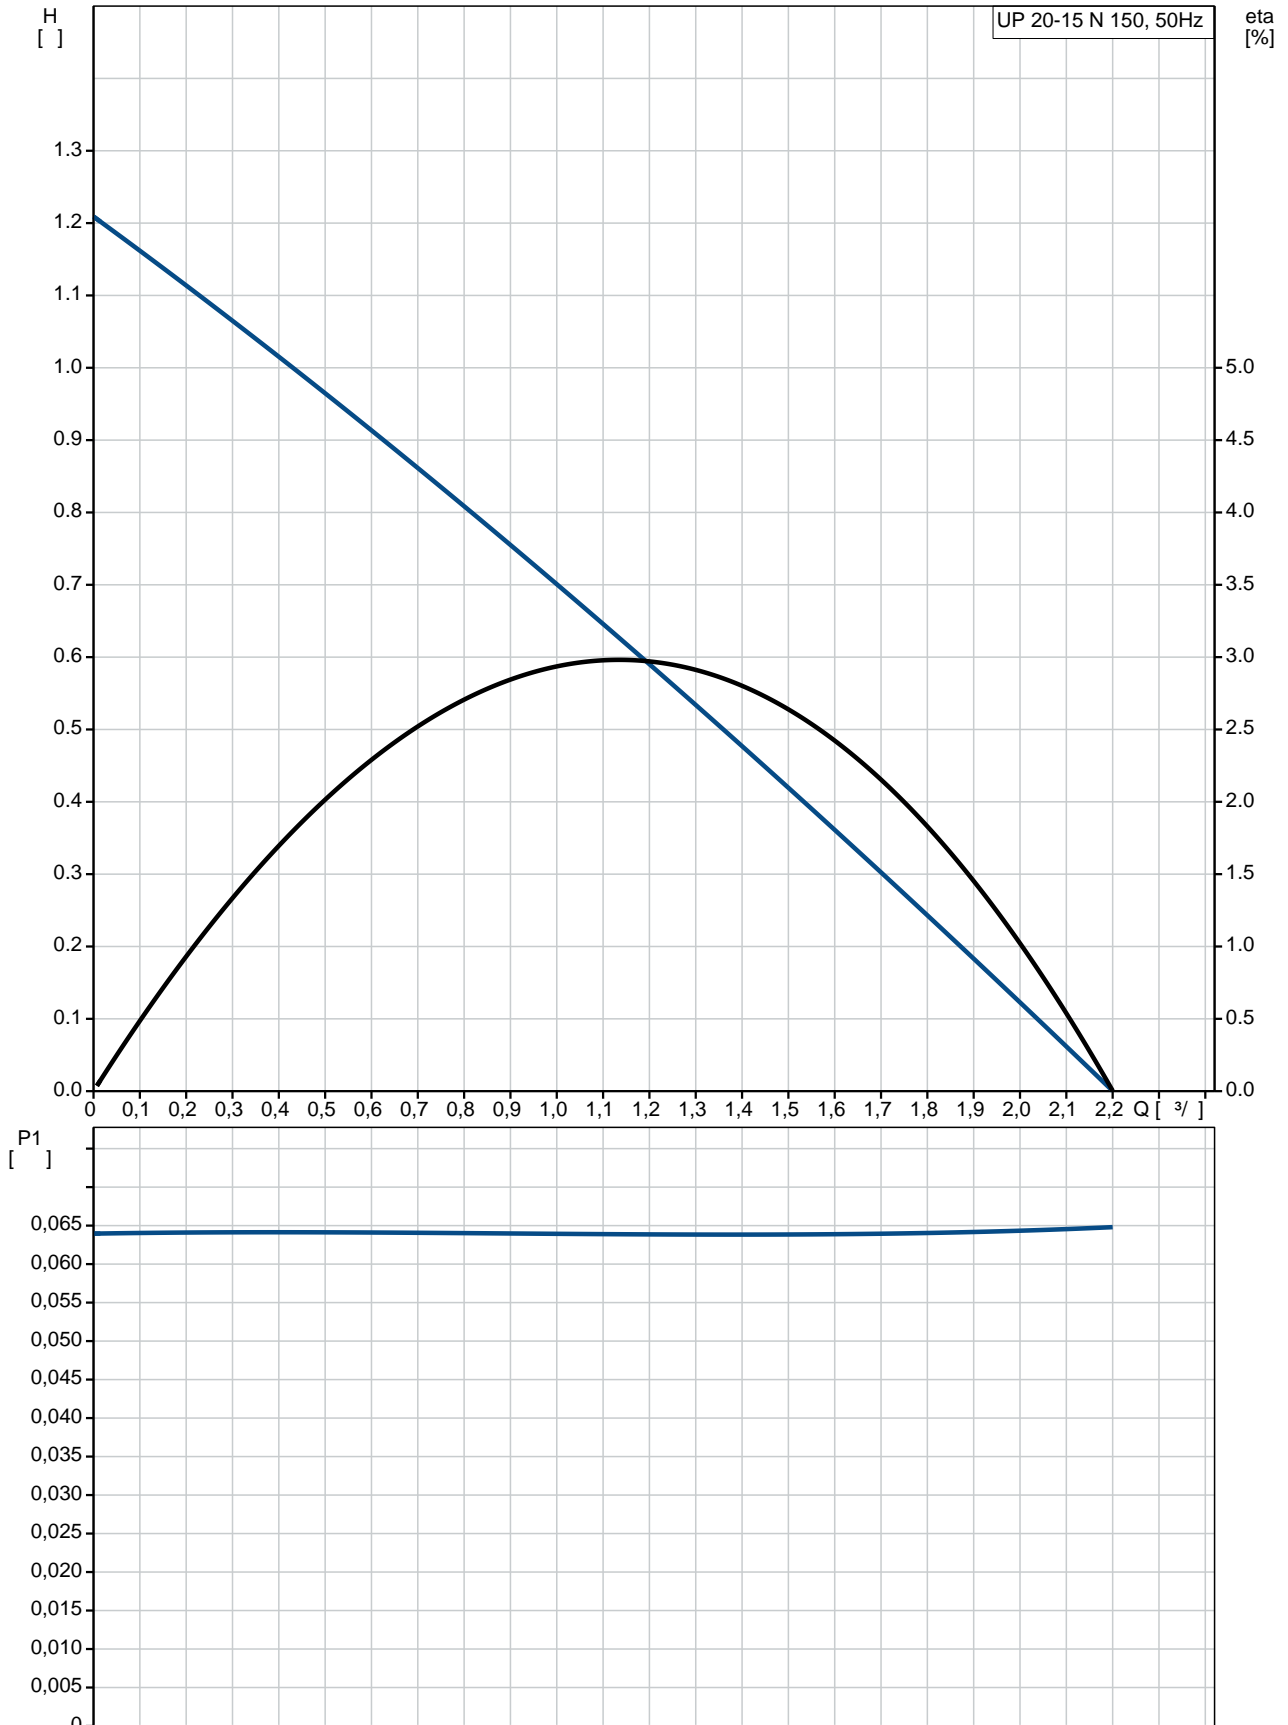


	UP 20-15 N 150
	59641500
EAN	5708601058738
	1
	15
TF	95
	CE,VDE,EAC,WEEE
	DIN W.-Nr. 1.4301
	AISI 304
	, PES/PP
80 OC:	80 °C
	10
	G 1 1/4
	PN 10
	150
	2.. 110 °C
	60 °C
	983.2 / 3
	65
	50 Hz
	1 x 230
3:	0.28 A
	2
(IEC 34-5):	IP44
(IEC 85):	F
	9H
	2.1
	2.3
	0.004 3
Danish VVS No.:	380615100
Swedish RSK No.:	5803011
Finnish LVI No.:	4615604
Norwegian NRF no.:	9042209
C	RS
	8413703000

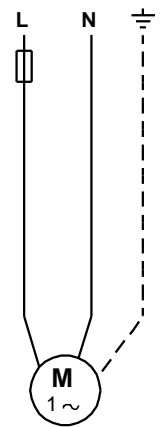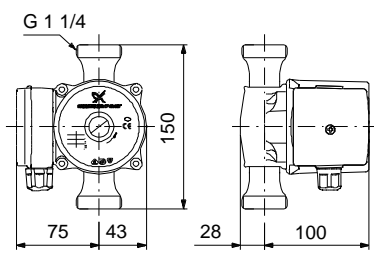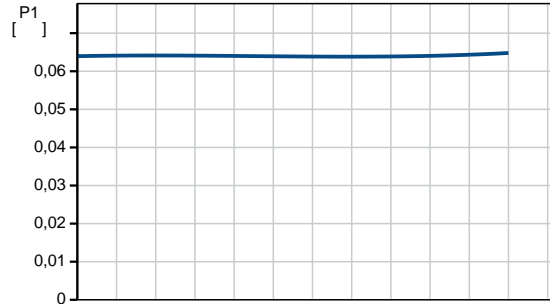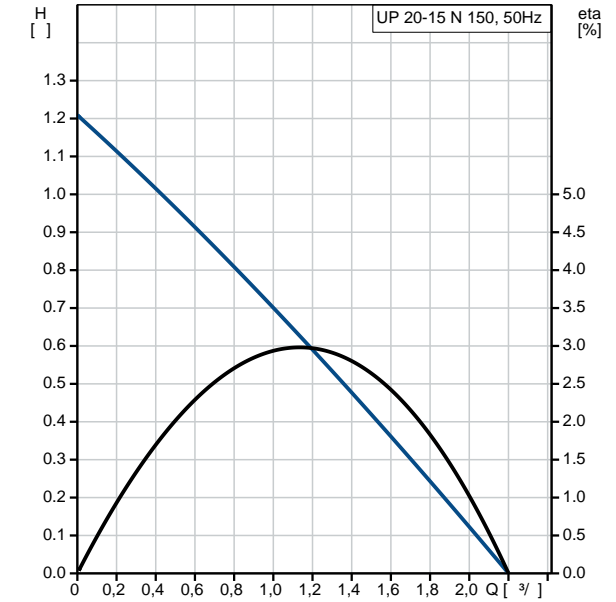

59641500 UP 20-15 N 150 50

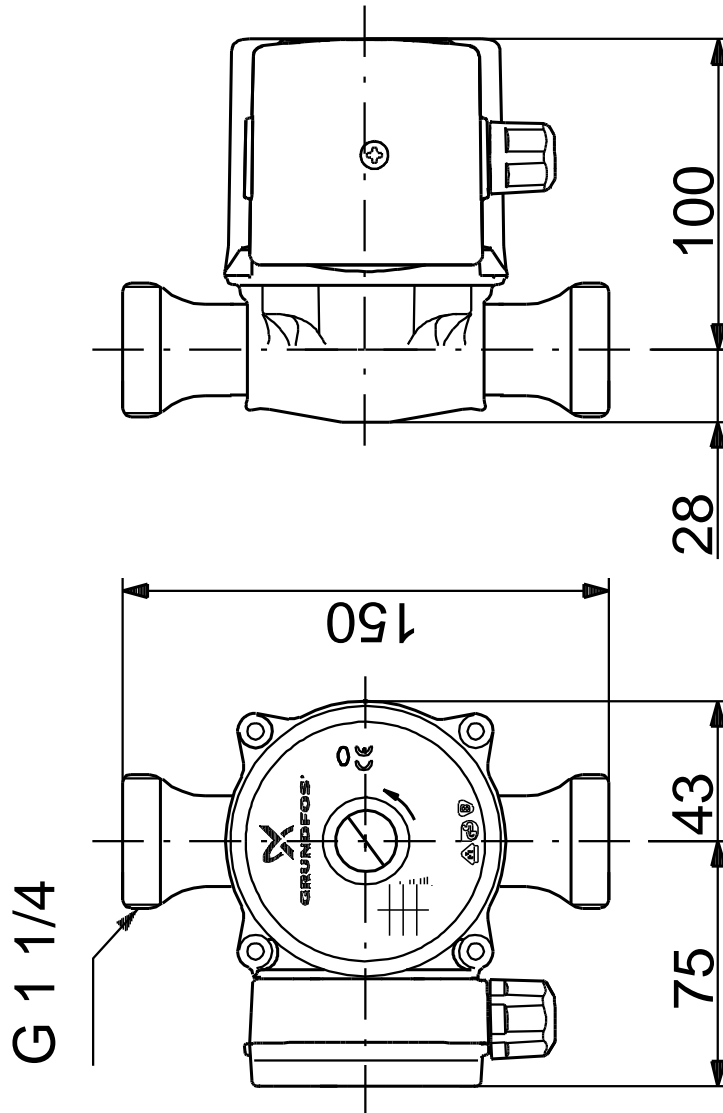

59641500 UP 20-15 N 150 50

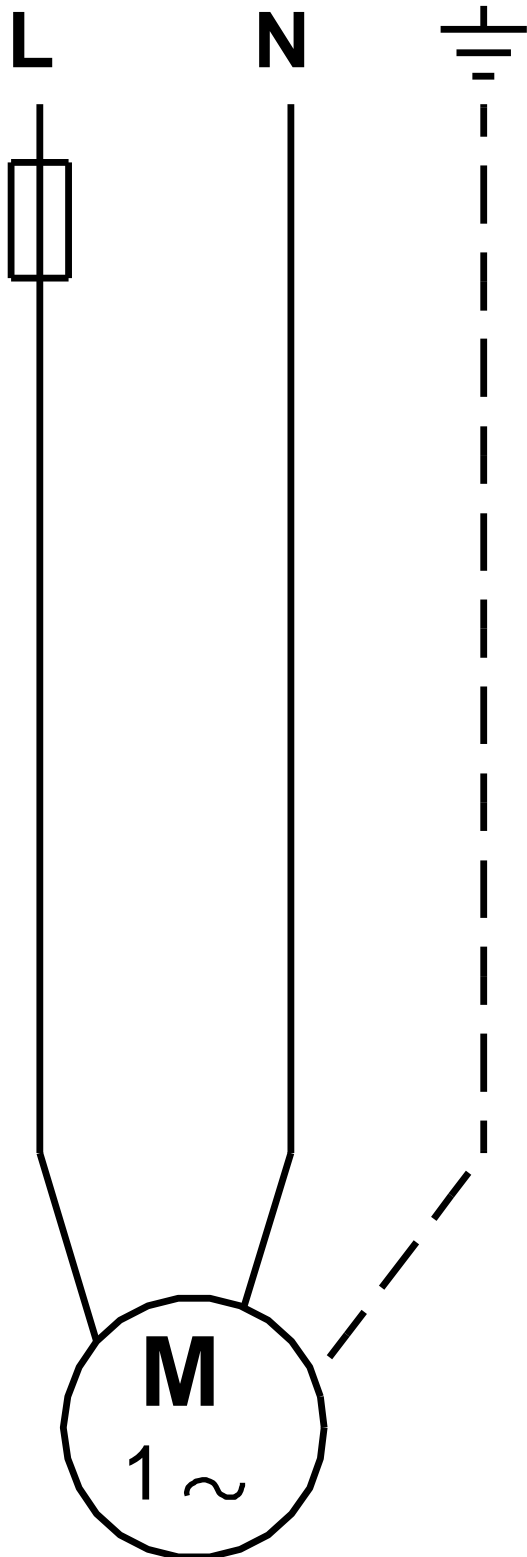

! [], .