

1 SP 5A-25R



: 5991925

, EN 1.4539 (AISI 904L),

MS40002.2

40 °C.

MP204

Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 .t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 5 <sup>3</sup>/  
 : 102  
 : SIC/SIC  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : CYLINDRICAL


EN 1.4539  
 AISI ASTM A240

EN 1.4539  
 AISI AISI 904L





DIN W.-Nr. 1.4539  
 AISI 904 L

:  
 : Rp1 1/2  
 : 4 inch  
 :  
 : MS4000  
 - P2: 2.2  
 ( 2), : 2.2  
 : 50 Hz  
 : 3 x 380-400-415  
 : 5.75-6.00-6.30 A  
 : 440-450-450 %  
 Cos - : 0.82-0.76-0.71  
 : 2840-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195607  
 :  
 ErP : MEI : 0.50  
 : EuP / .  
 : 26.7  
 : 28.5  
 : 21.7 <sup>3</sup>  
 C : DK  
 : 8413702900

## 5991925 SP 5A-25R 50

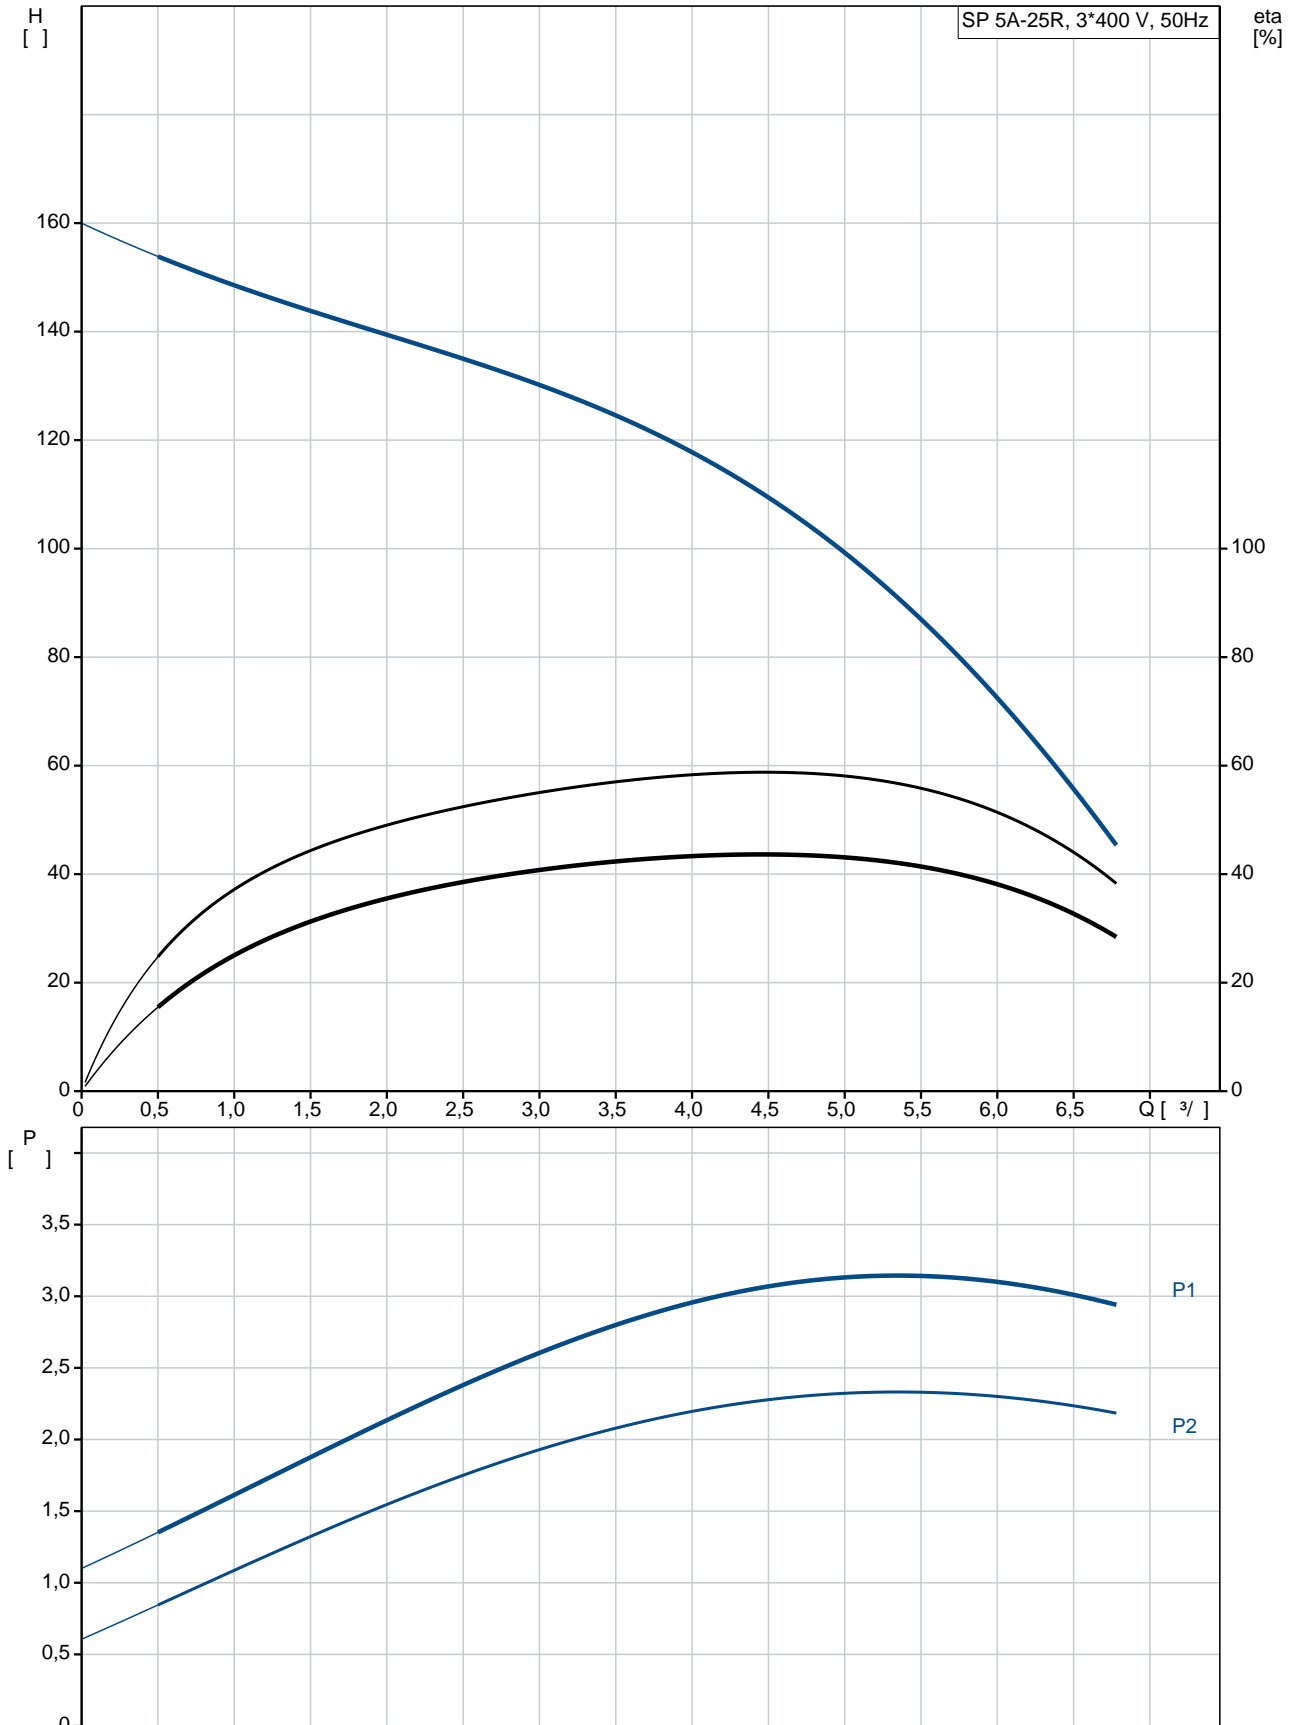


	SP 5A-25R
	5991925
EAN	5700395945515
	2900 /
	5 3/
	102
	25
	NONE
	SIC/SIC
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	CYLINDRICAL
	EN 1.4539
	AISI ASTM A240
	EN 1.4539
	AISI AISI 904L
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS4000
	GRUNDFOS
- P2:	2.2
( 2),	2.2
	50 Hz
	3 x 380-400-415
	5.75-6.00-6.30 A
	440-450-450 %
Cos -	0.82-0.76-0.71
	2840-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	F
	79195607

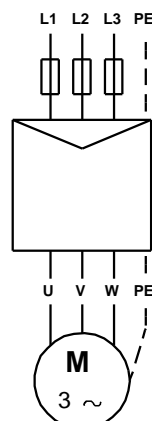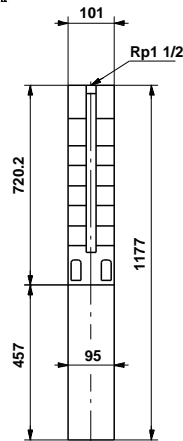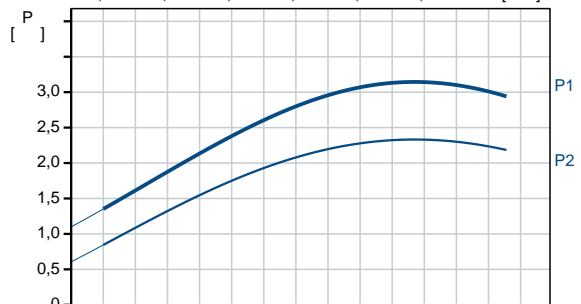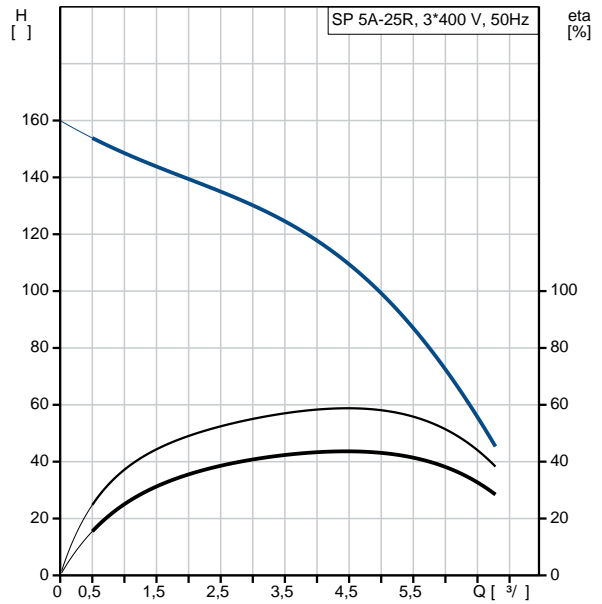


MEI :		0.50
ErP :	EuP	/ .
:		26.7
:		28.5
:		21.7 <sup>3</sup>
C :	DK	
:		8413702900

**5991925 SP 5A-25R 50**

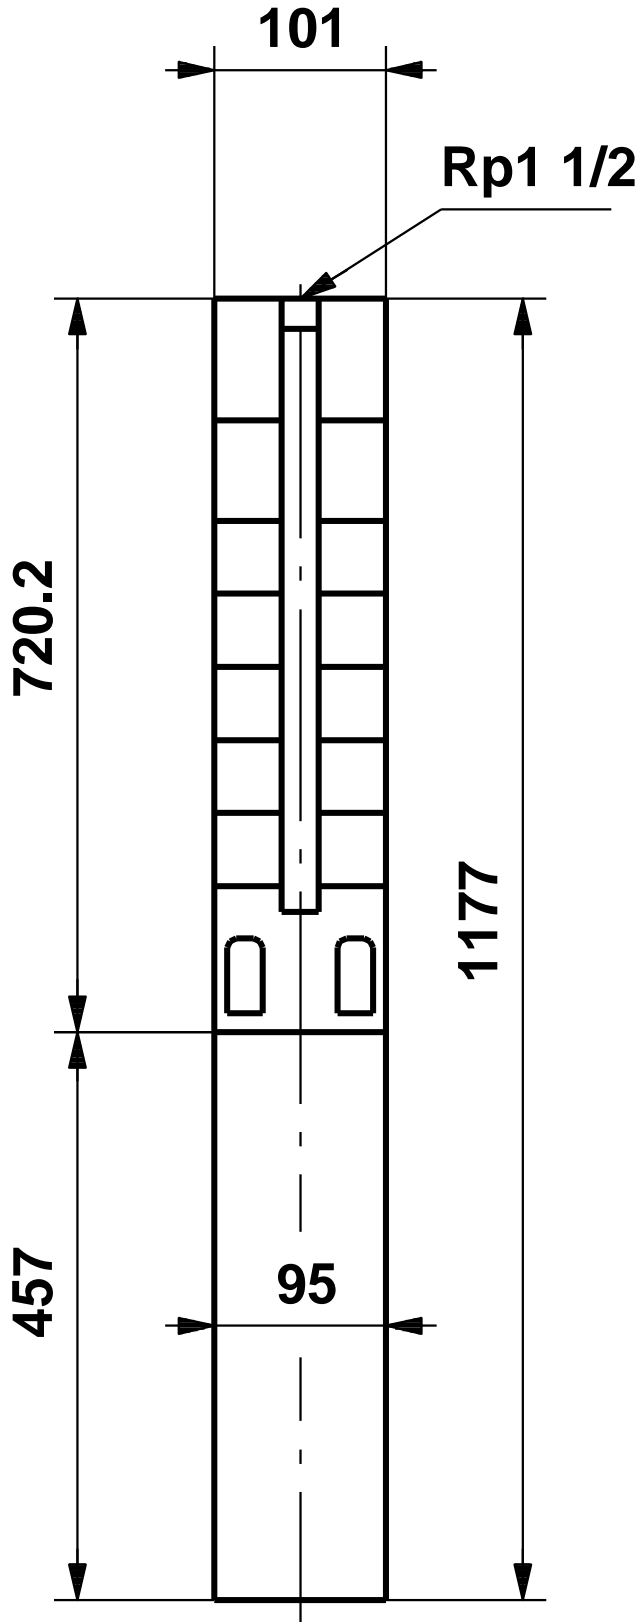

5991925 SP 5A-25R 50

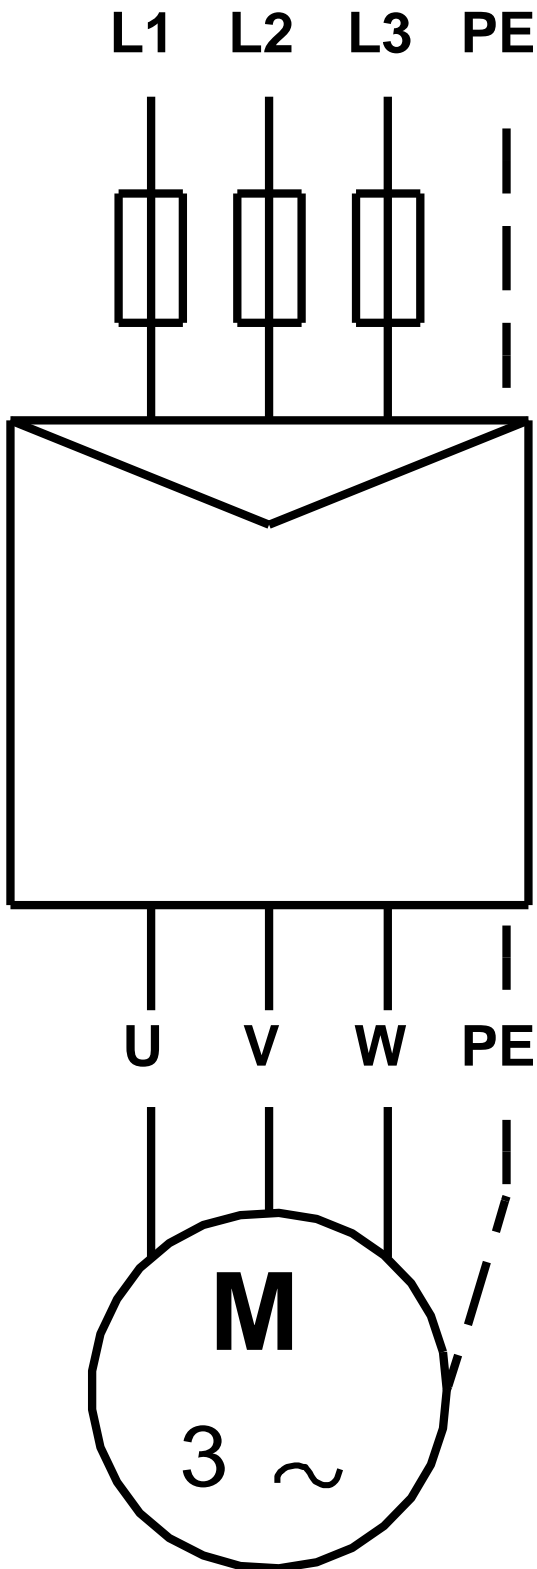

!

[ ],