

1 Unilift AP12.40.06.A3



: 96023872

F.

0,8

10


():

12


10

: 0..55 °C
998.2 / 3


96023872 Unilift AP12.40.06.A3 50

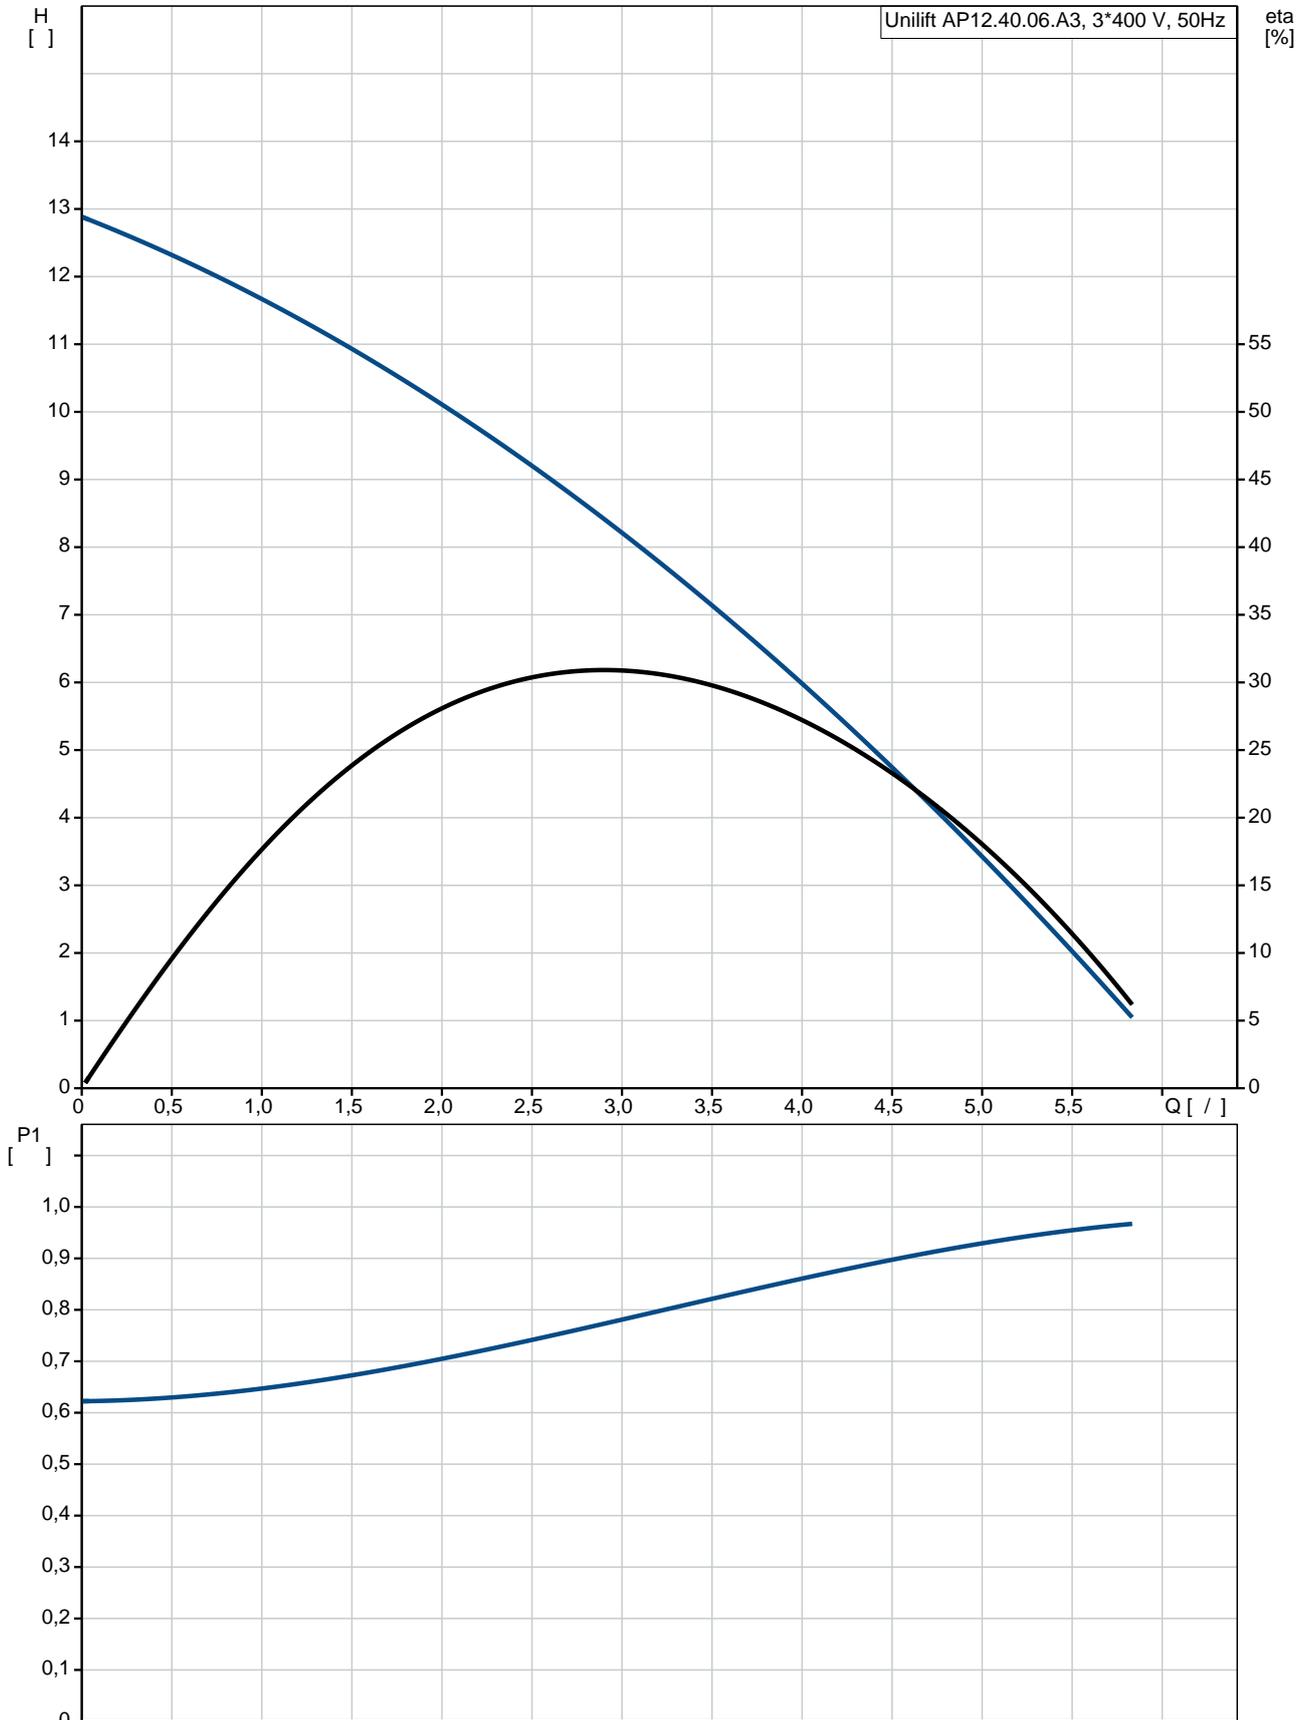


: Unilift AP12.40.06.A3	
: 96023872	
EAN :	5700390547417
: UER 504	
Maximum flow:	5 /
Ma . :	5 /
: 13	
: 12	
: DIN W.-Nr. 1.4301	
: AISI 304	
: DIN W.-Nr. 1.4301	
: AISI 304	
: Rp 1 1/2	
: 7	
/ : D/S	
: 0 .. 55 °C	
: 998.2 / ³	
: - P1: 0.9	
P2:	0.6
: 50 Hz	
: 3 x 400	
: 1.6 A	
Cos phi -	: 0.83
: 2815 /	
(IEC 34-5): IP68	
(IEC 85): F	
: 10	
: CEE	
: 14.3	
: 15.8	
C	: HU
: 8413702100	

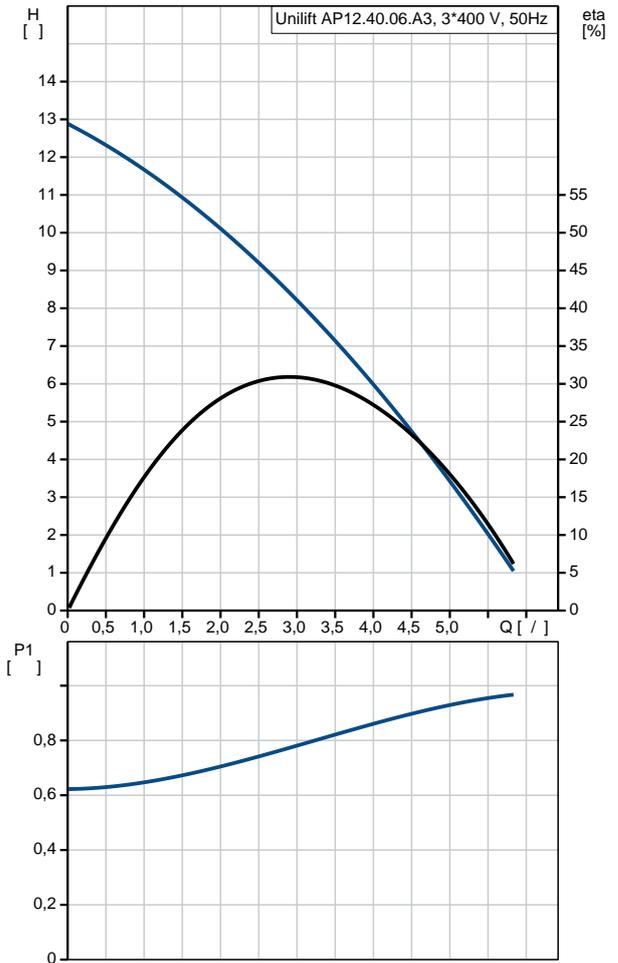

96023872 Unilift AP12.40.06.A3 50

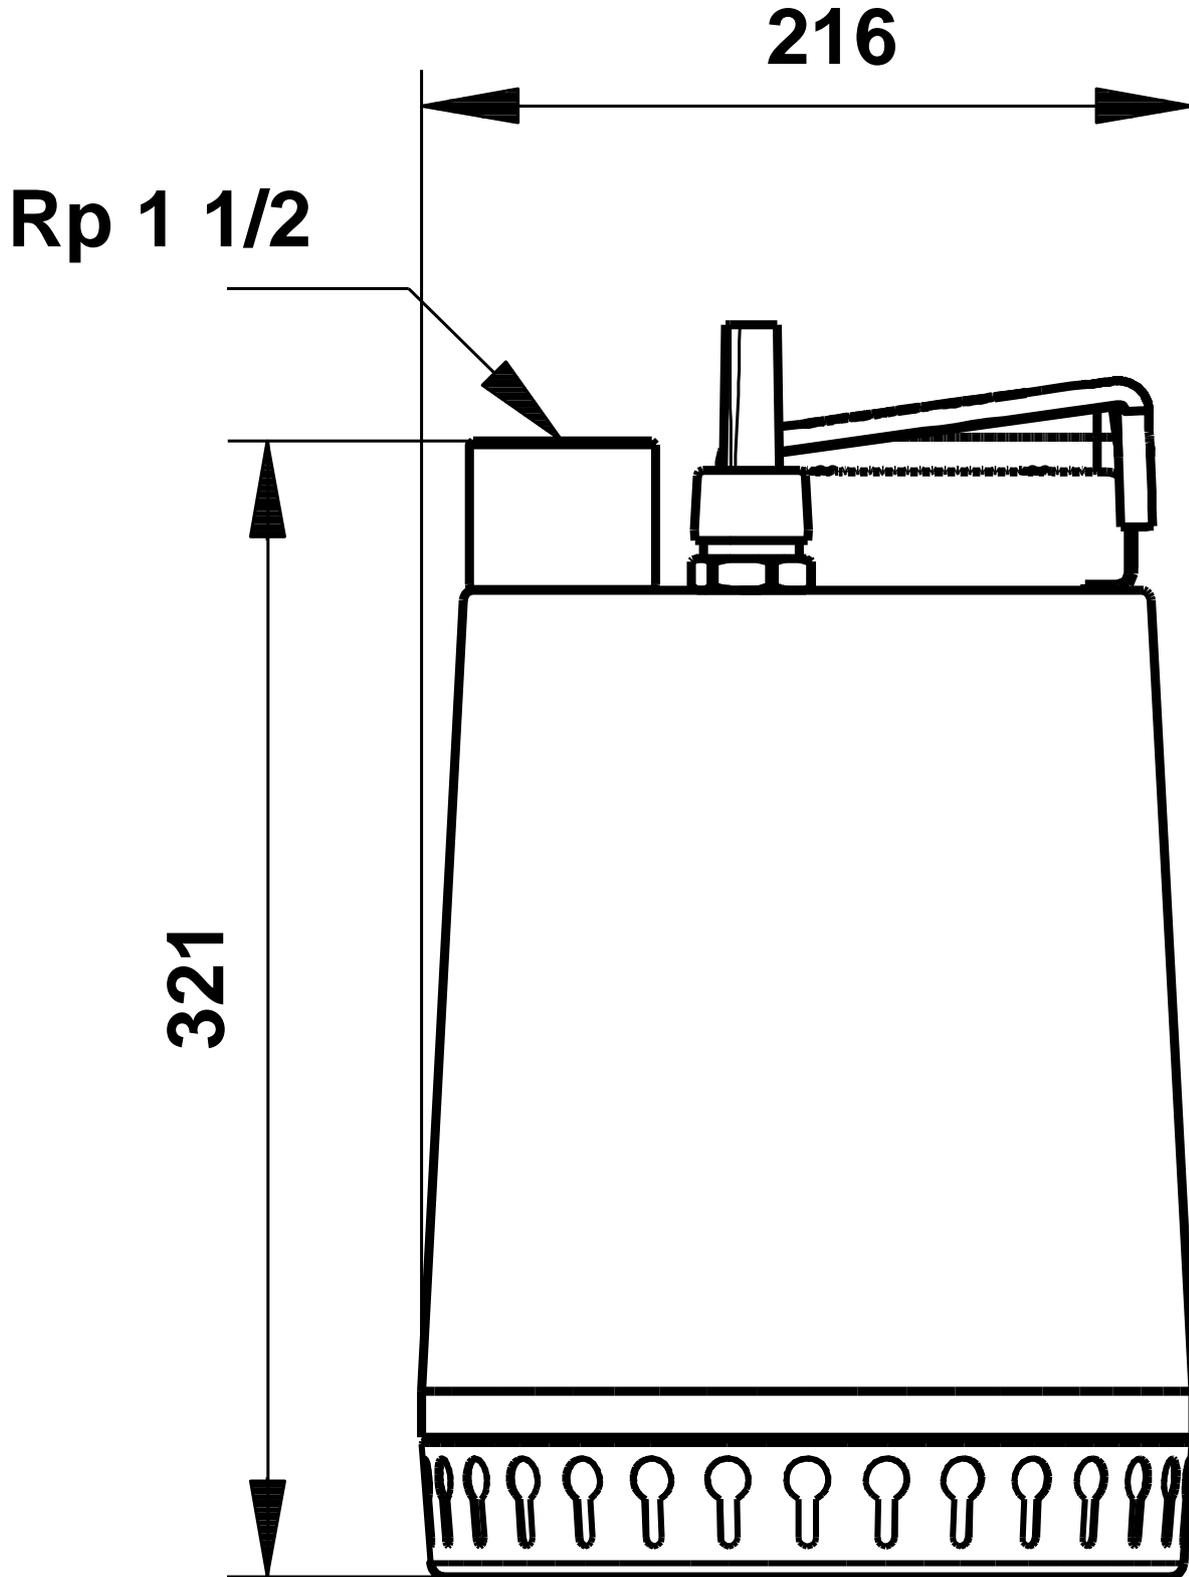

96023872 Unilift AP12.40.06.A3 50

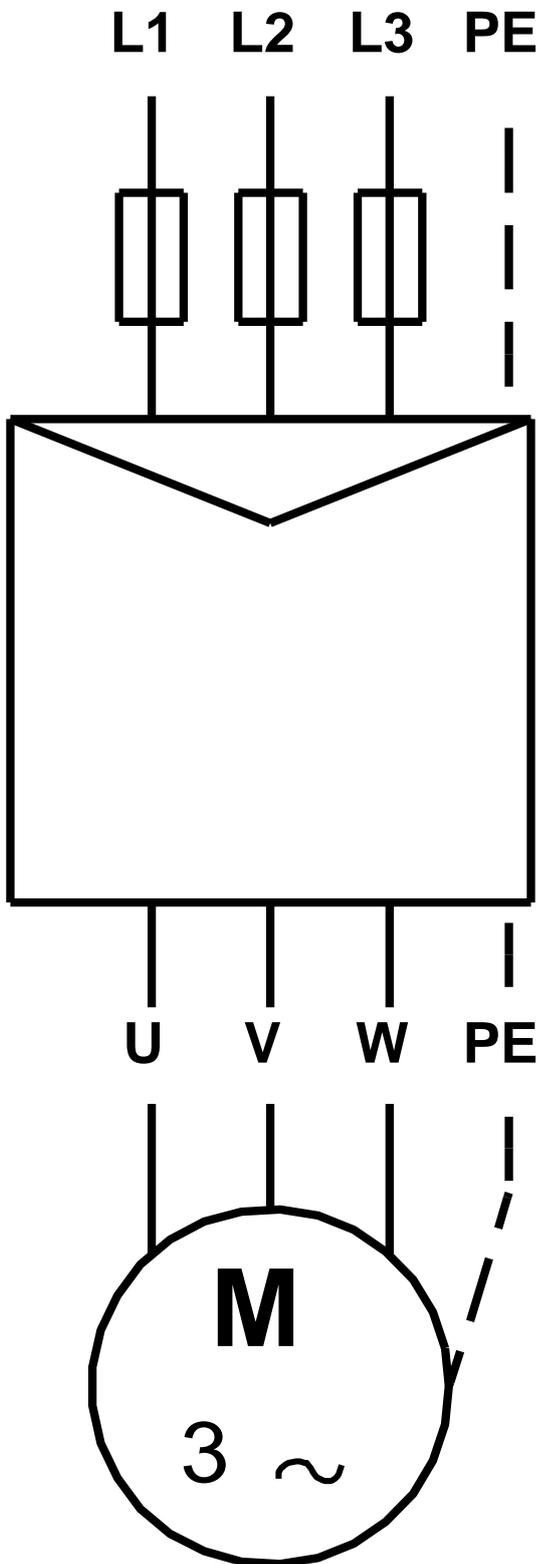

! [], .