

1 CRT 4-4 A-P-A-E-AUUE



: 96100767

" - "

EN 12756.

/ PJE.

- 1-

: -20 .. 120 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 6 <sup>3</sup>/<sub>4</sub>  
 : 22.1

: AUUE  
 : CE,TR  
 - : ISO9906:2012 3B

ASTM B 265

ASTM B 265  
 NONE


Maximum ambient temperature: 40 °C

- : 25 / 120 °C  
 : 25 / -20 °C




: PJE  
 : 42,4 mm  
 : FT100

: 80B  
- P2: 0.75  
( 2), : 0.75  
0.75  
: 50 Hz  
: 1 x 220-230/240  
: 5.10/4.75 A  
: 300 %  
Cos - : 0.99  
: 2780 /  
: 72.1% : 72.1 %  
: 2  
(IEC 34-5): 55 Dust/Jetting  
(IEC 85): F  
: 85215104  
:  
: MEI : 0.7  
: 18.8  
: 23.8

## 96100767 CRT 4-4 A-P-A-E-AUUE 50

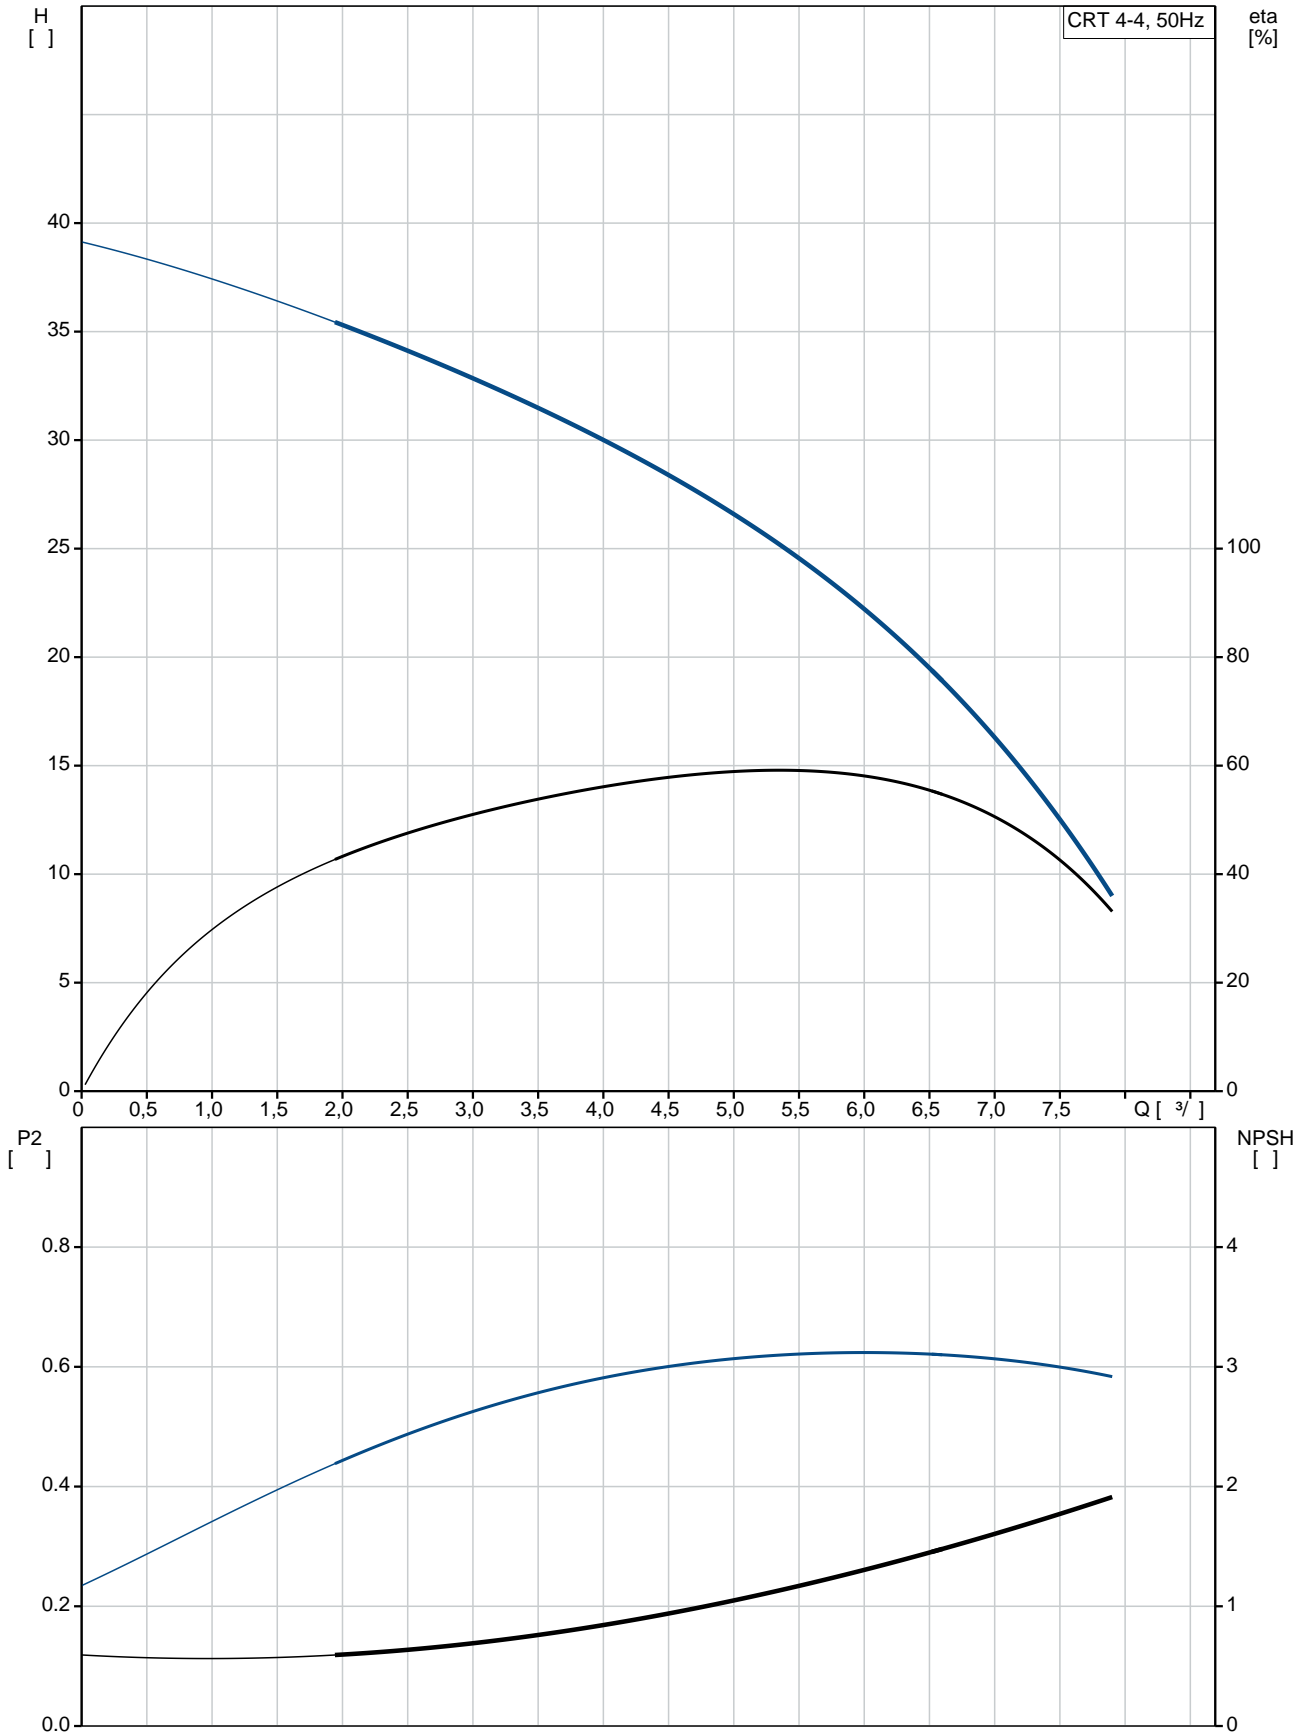


	CRT 4-4
	A-P-A-E-AUUE
	96100767
EAN	5700395848823
	2900 /
	6 <sup>3/4</sup>
	22.1
Maximum head:	40.2
	40.2
	4
	4
	AUUE
	CE,TR
	ISO9906:2012 3B
	A
	A
	ASTM B 265
	ASTM B 265
	A
	E
	NONE
Maximum ambient temperature:	40 °C
	- : 25 / 120 °C
	- : 25 / -20 °C
	PJE
	42,4 mm
	FT100
	P
	-20 .. 120 °C
	20 °C
	998.2 / <sup>3</sup>
	80B
	- P2: 0.75
( 2),	: 0.75
( 2),	: 0.75
	50 Hz
	1 x 220-230/240
	5.10/4.75 A
	300 %
Cos	: 0.99
	2780 /
	72.1%
	72.1 %
	2
(IEC 34-5):	55 Dust/Jetting
(IEC 85):	F
	PTO

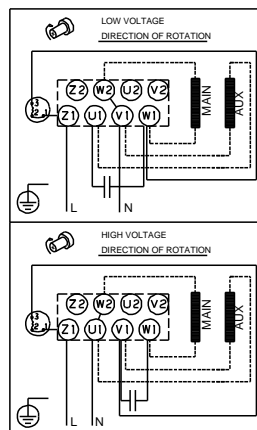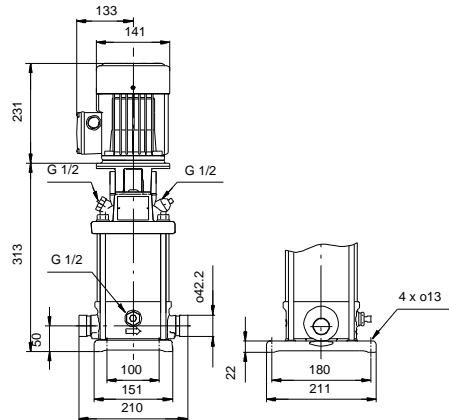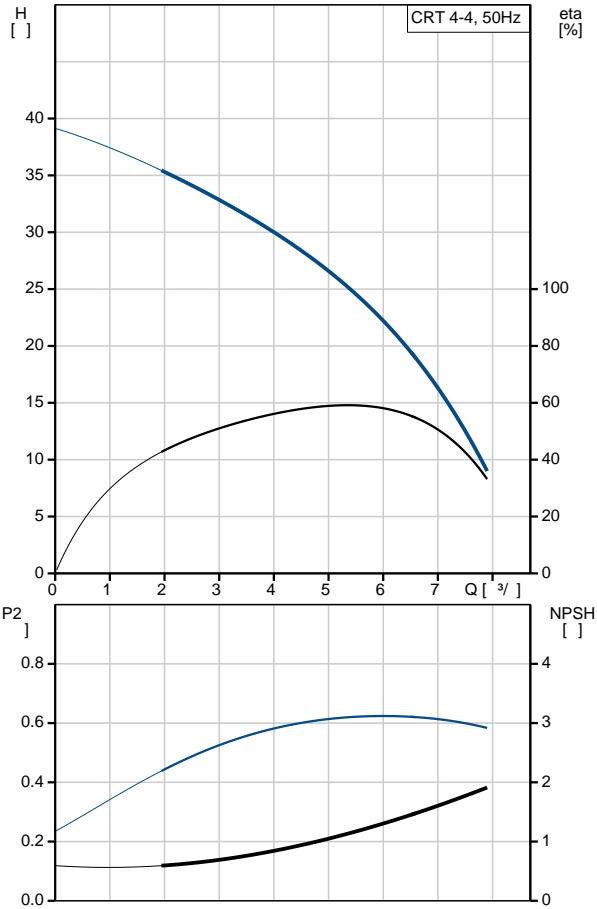

	85215104
MEI :	0.7
	18.8
	23.8

**96100767 CRT 4-4 A-P-A-E-AUUE 50**

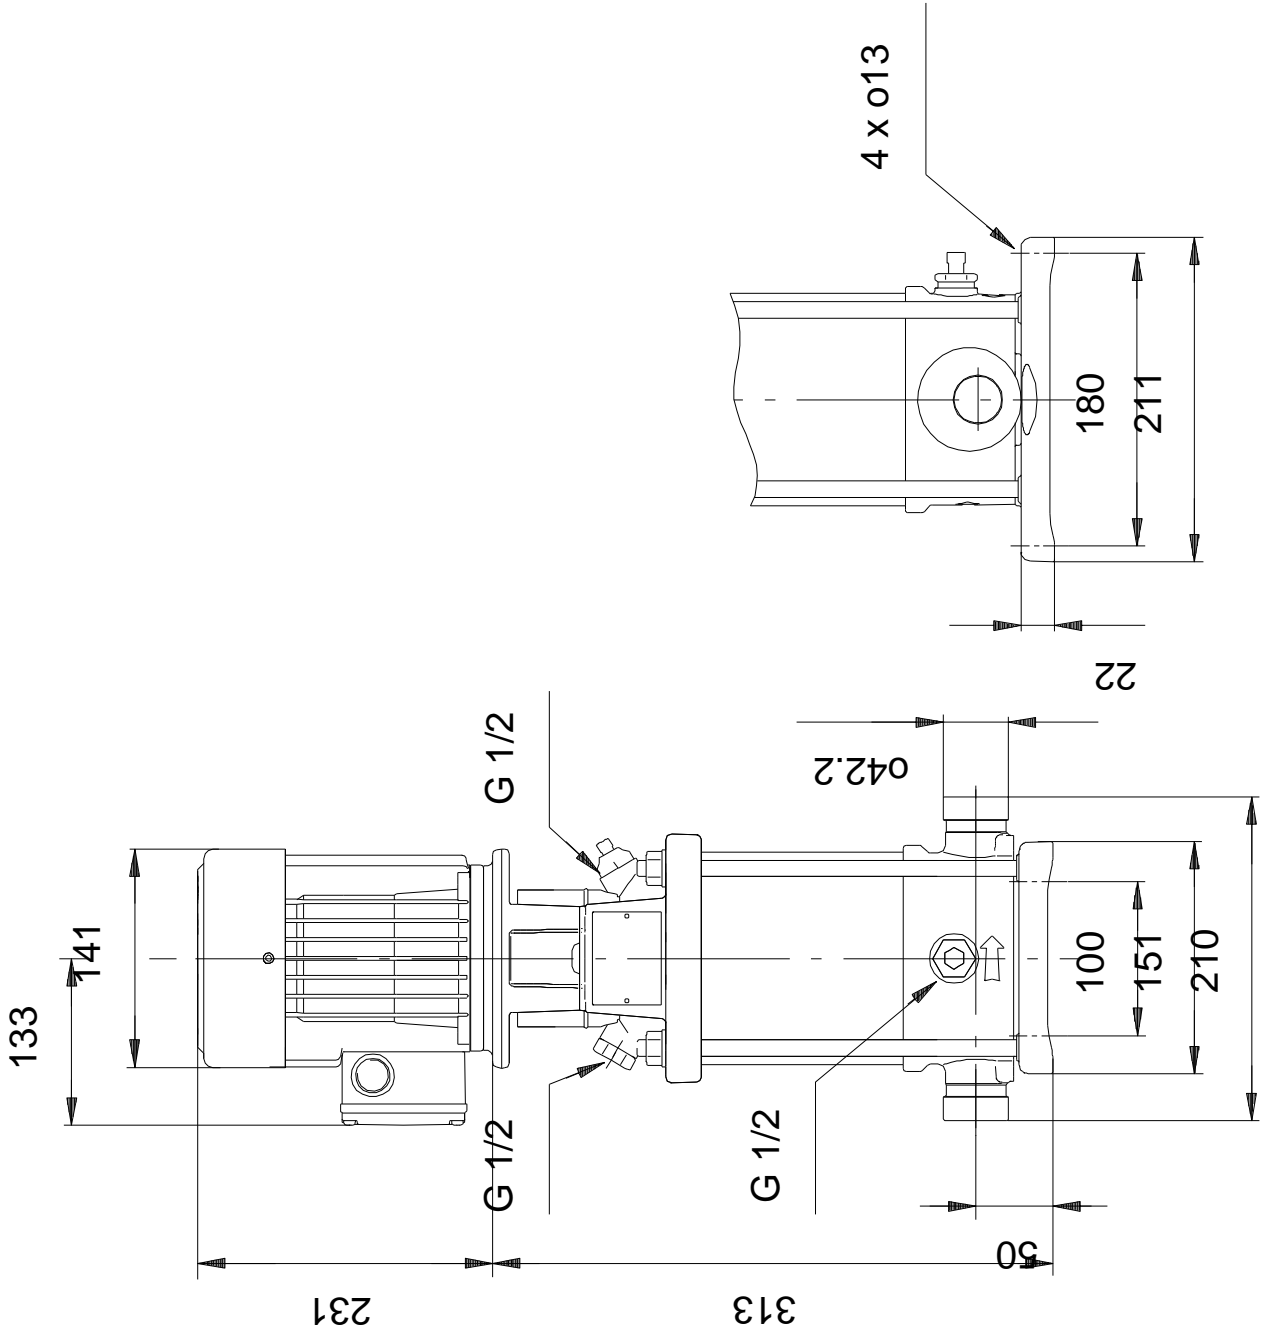

## 96100767 CRT 4-4 A-P-A-E-AUUE 50

