

1 UPS 65-120 F B



: 96402285

« » , . . .

- \* : \* 3
- \* ,
- \* ,
- \* :
- \* \*

- 1 -

Relay:

: -10 .. 120 °C  
 : 60 °C  
 983.2 / 3

: CE,EAC,AAA,WEEE

DIN W.-Nr. 2.1176.01  
 ASTM B-271

DIN W.-Nr. 1.4301  
 AISI 304

: 0 .. 40 °C

: 10

:

DIN

:

DN 65

:

PN 6 / PN 10

:

340

:

1: 1050

2: 1150

: 1200

:

50 Hz

:

1 x 230-240

1:

5.1 A

2:

5.6 A

3:

5.5 A

Cos

1:

0.9

Cos

2:

0.89

Cos :

0.95

-

: 30 /400

(IEC 85):

H

(IEC 60529):

X4D

:

:

33.8

:

35.3

:

0.043 <sup>3</sup>

C


:

RS




:

8413703000





## 96402285 UPS 65-120 F B 50

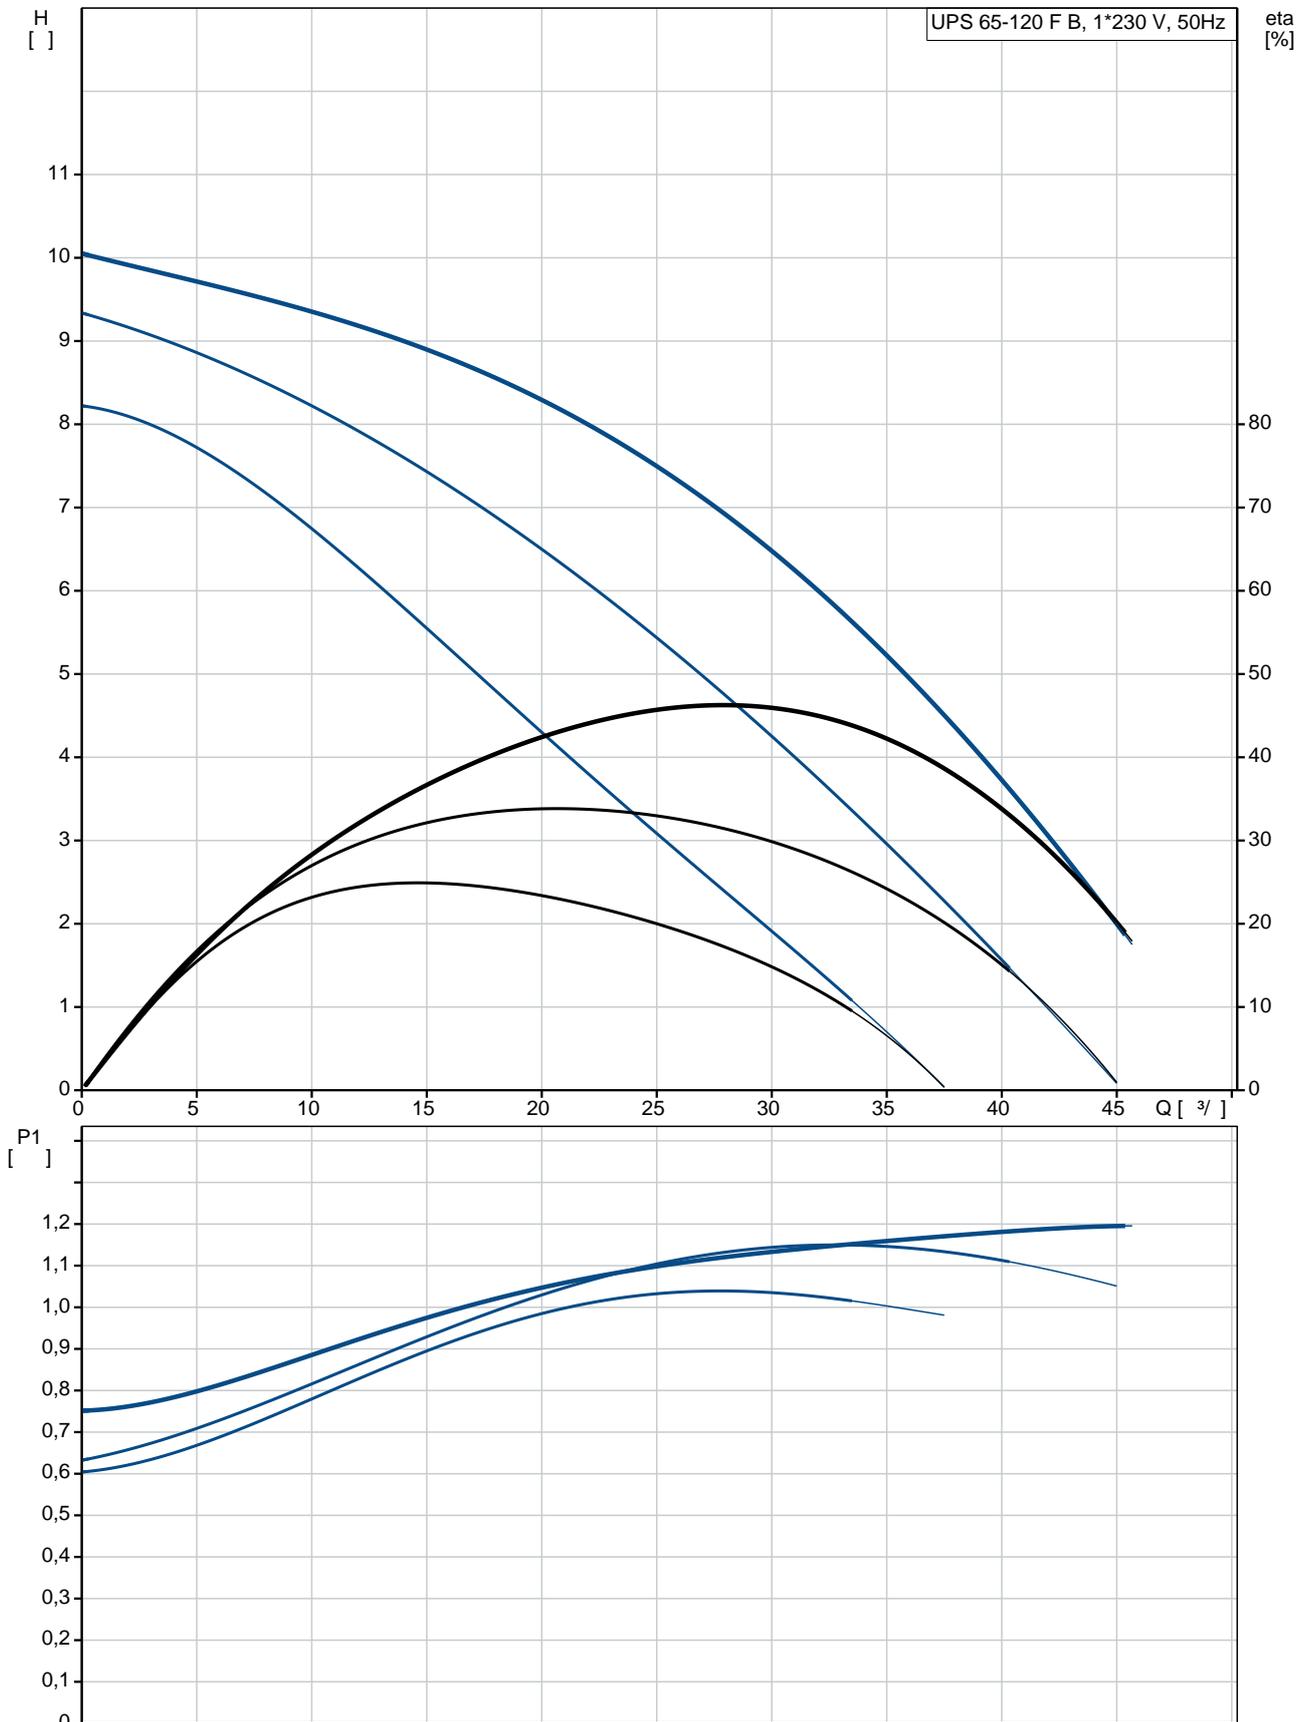

		UPS 65-120 F B
		96402285
EAN		5700390665128
		3
		120
		CE,EAC,AAA,WEEE
		DIN W.-Nr. 2.1176.01
		ASTM B-271
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 65
		PN 6 / PN 10
		340
		-10 .. 120 °C
		60 °C
		983.2 / 3
		1: 1050
		2: 1150
		1200
		50 Hz
		1 x 230-240
	1:	5.1 A
	2:	5.6 A
	3:	5.5 A
Cos	1:	0.9
Cos	2:	0.89
Cos		0.95
		30 /400
	(IEC 85):	H
	(IEC 60529):	X4D
		CONTACT
		1.30H
		33.8
		35.3
		0.043 3
C		RS
		8413703000

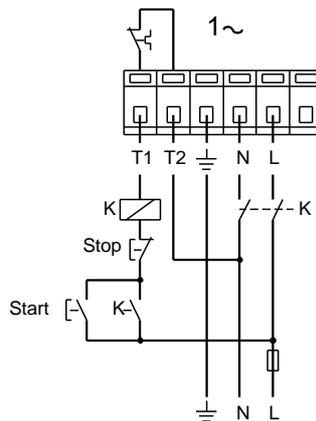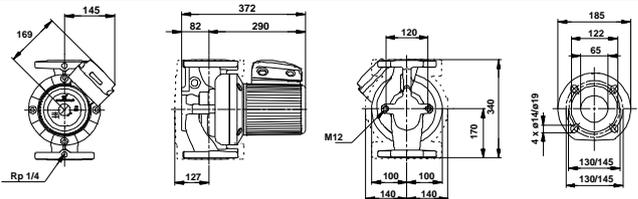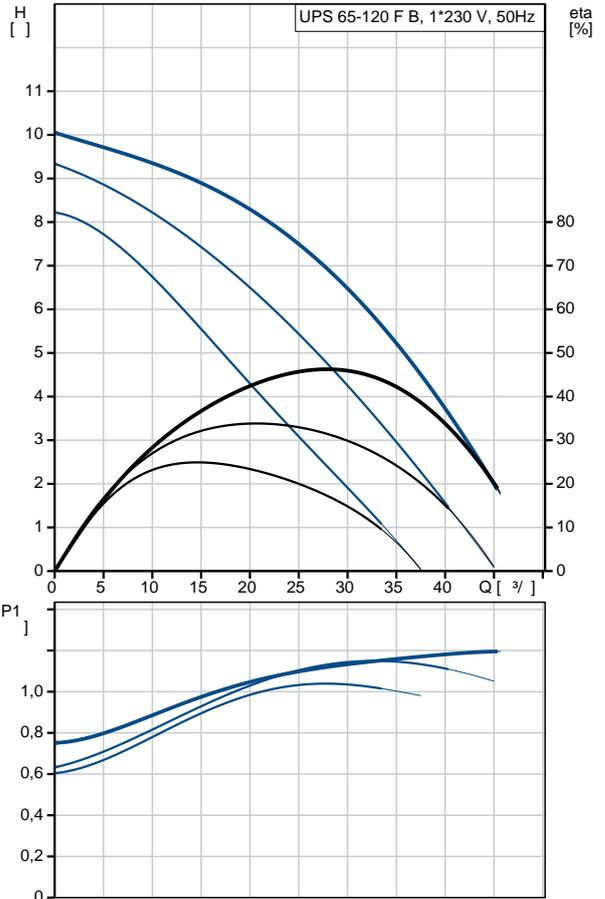

## 96402285 UPS 65-120 F B 50

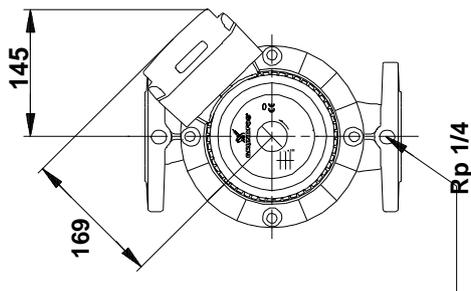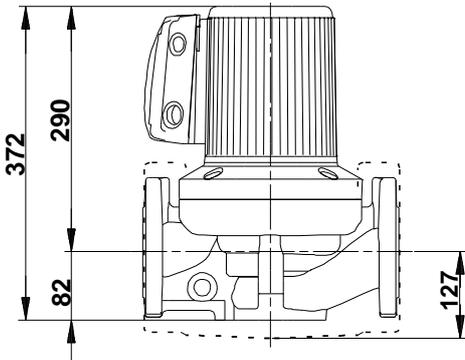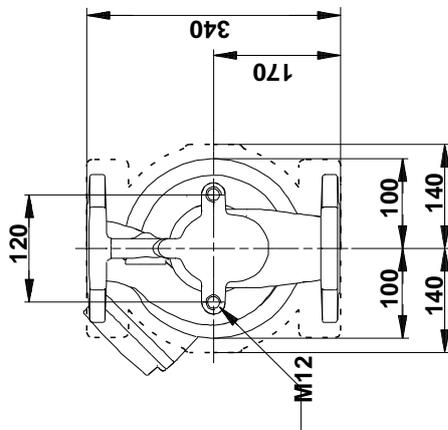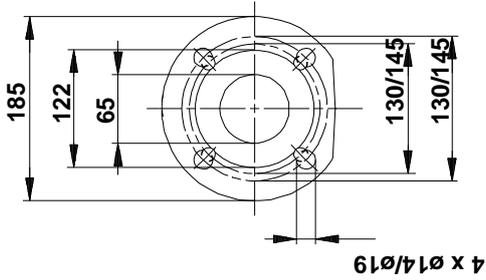

## 96402285 UPS 65-120 F B 50

