

1 UPS 80-120 F B



: [96402445](#)

« » , . . .

- * : * 3
- * , ,
- * ,
- * : *
- * ,

- 3 -

Relay:

: -10 .. 120 °C
 : 60 °C
 : 983.2 / 3

: CE,EAC,AAA,WEEE

DIN W.-Nr. 2.1176.01
 ASTM B-271

DIN W.-Nr. 1.4301
 AISI 304

: 0 .. 40 °C

: 10
: DIN
: DN 80
: PN 10
: 360

:
1: 1000
2: 1100

: 1500
: 50 Hz
: 3 x 400-415
1: 1.65 A
2: 1.8 A
3: 2.75 A


Cos 1: 0.87
Cos 2: 0.88
Cos : 0.79

(IEC 85): H
(IEC 60529): X4D





:
: 43.2
: 45
: 0.055 ³

Danish VVS No.: 380745144
C : RS
: 8413703000





96402445 UPS 80-120 F B 50

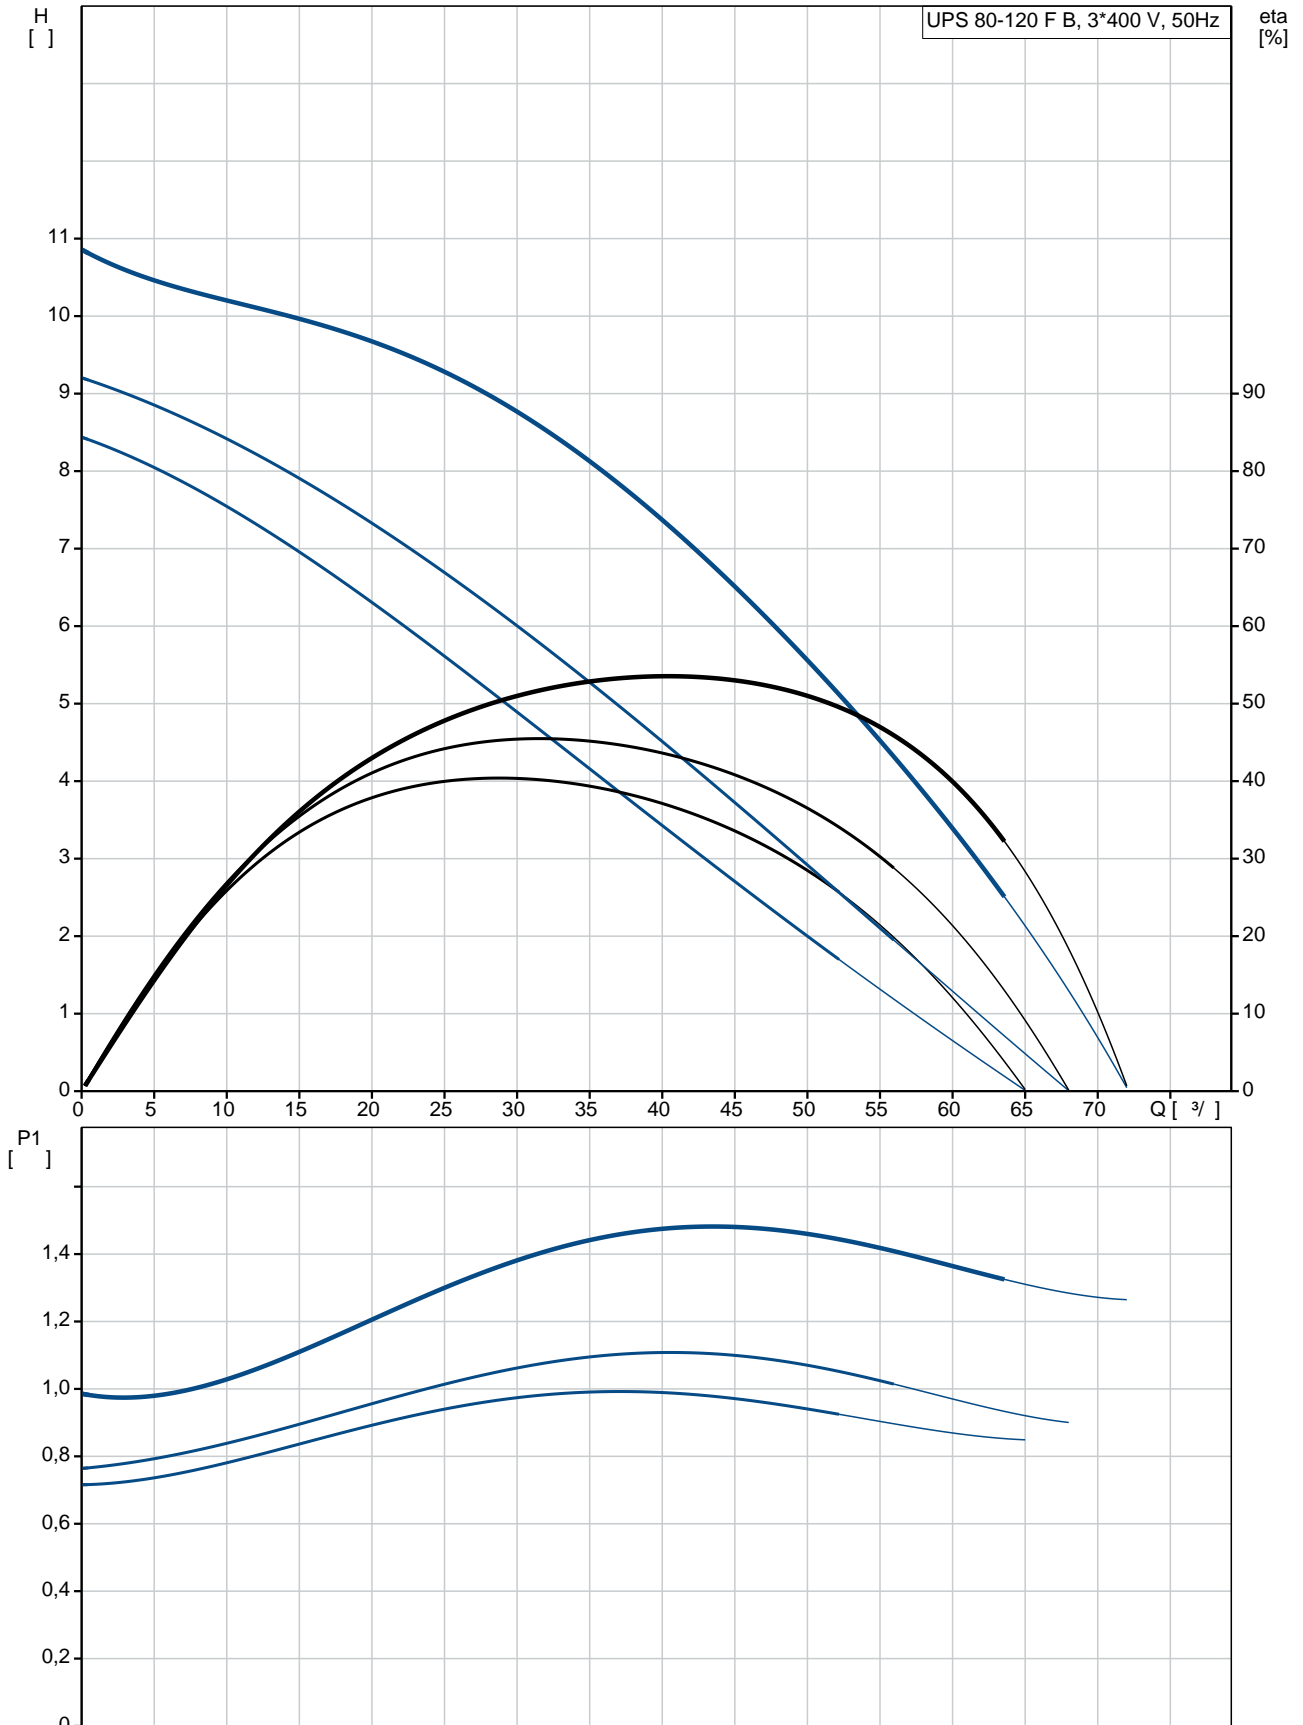

		UPS 80-120 F B
		96402445
EAN	:	5708601066214
		3
		120
		CE,EAC,AAA,WEEE
		DIN W.-Nr. 2.1176.01
		ASTM B-271
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		10
		DIN
		DN 80
		PN 10
		360
		-10 .. 120 °C
		60 °C
		983.2 / 3
		1: 1000
		2: 1100
		1500
		50 Hz
		3 x 400-415
		1: 1.65 A
		2: 1.8 A
		3: 2.75 A
Cos	1:	0.87
Cos	2:	0.88
Cos	:	0.79
		(IEC 85): H
		(IEC 60529): X4D
		CONTACT
		1.30H
		43.2
		45
		0.055 3
Danish VVS No.:	:	380745144
C	:	RS
		8413703000

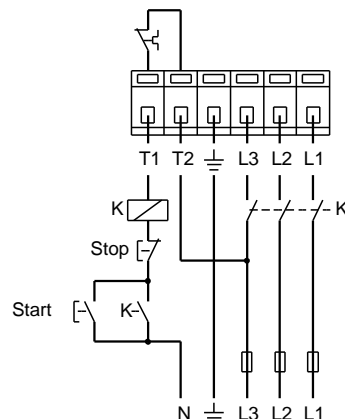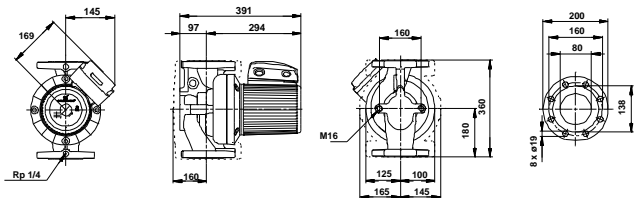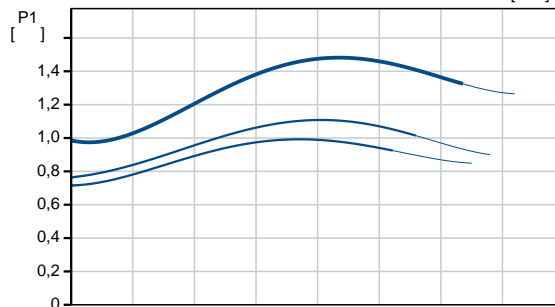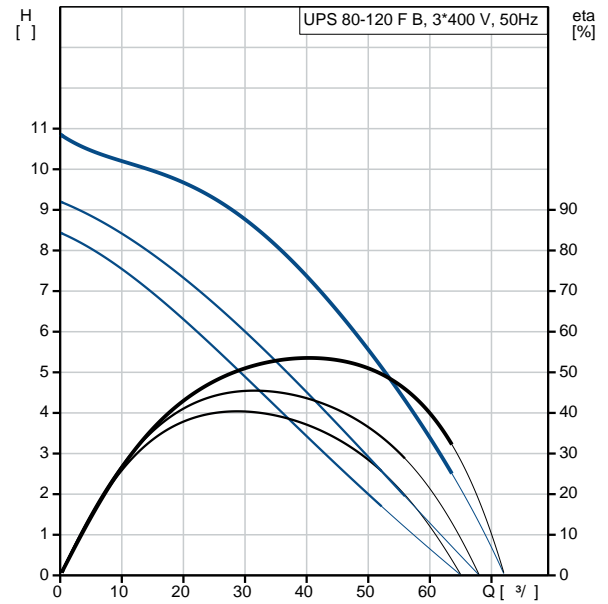

96402445 UPS 80-120 F B 50

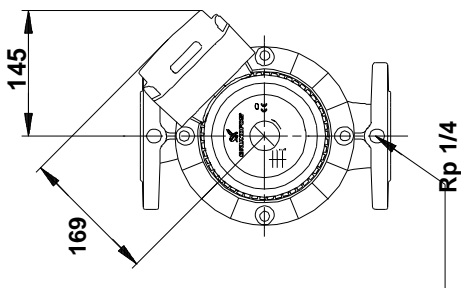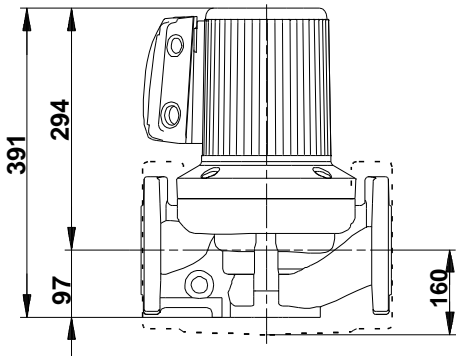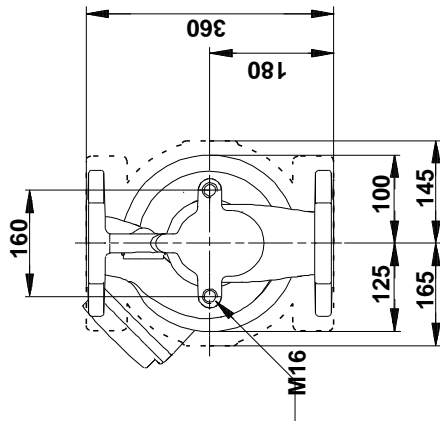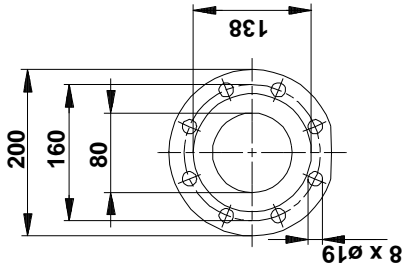

96402445 UPS 80-120 F B 50

