

1 UPSD 80-60 F



: 96408952

- *
- *
- *
- *
- *
- *
- *

Relay:

: -10 .. 120 °C
: 60 °C
983.2 / 3

: AAA,EAC


EN-JL1040
ASTM 35 B - 40 B

DIN W.-Nr. 1.4301
AISI 304





: 0 .. 40 °C

. : 6
: : DIN
: : DN 80
: : PN 6
: : 360
:
1: 470
2: 570
: 880
: 50 Hz
: 3 x 400-415
1: 0.84 A
2: 1 A
3: 1.8 A
Cos 1: 0.81
Cos 2: 0.82
Cos : 0.71
(IEC 85): H
(IEC 60529): X4D
:
: 72.5
: 80.7
: 0.2³
C : RS
: 8413703000





96408952 UPSD 80-60 F 50

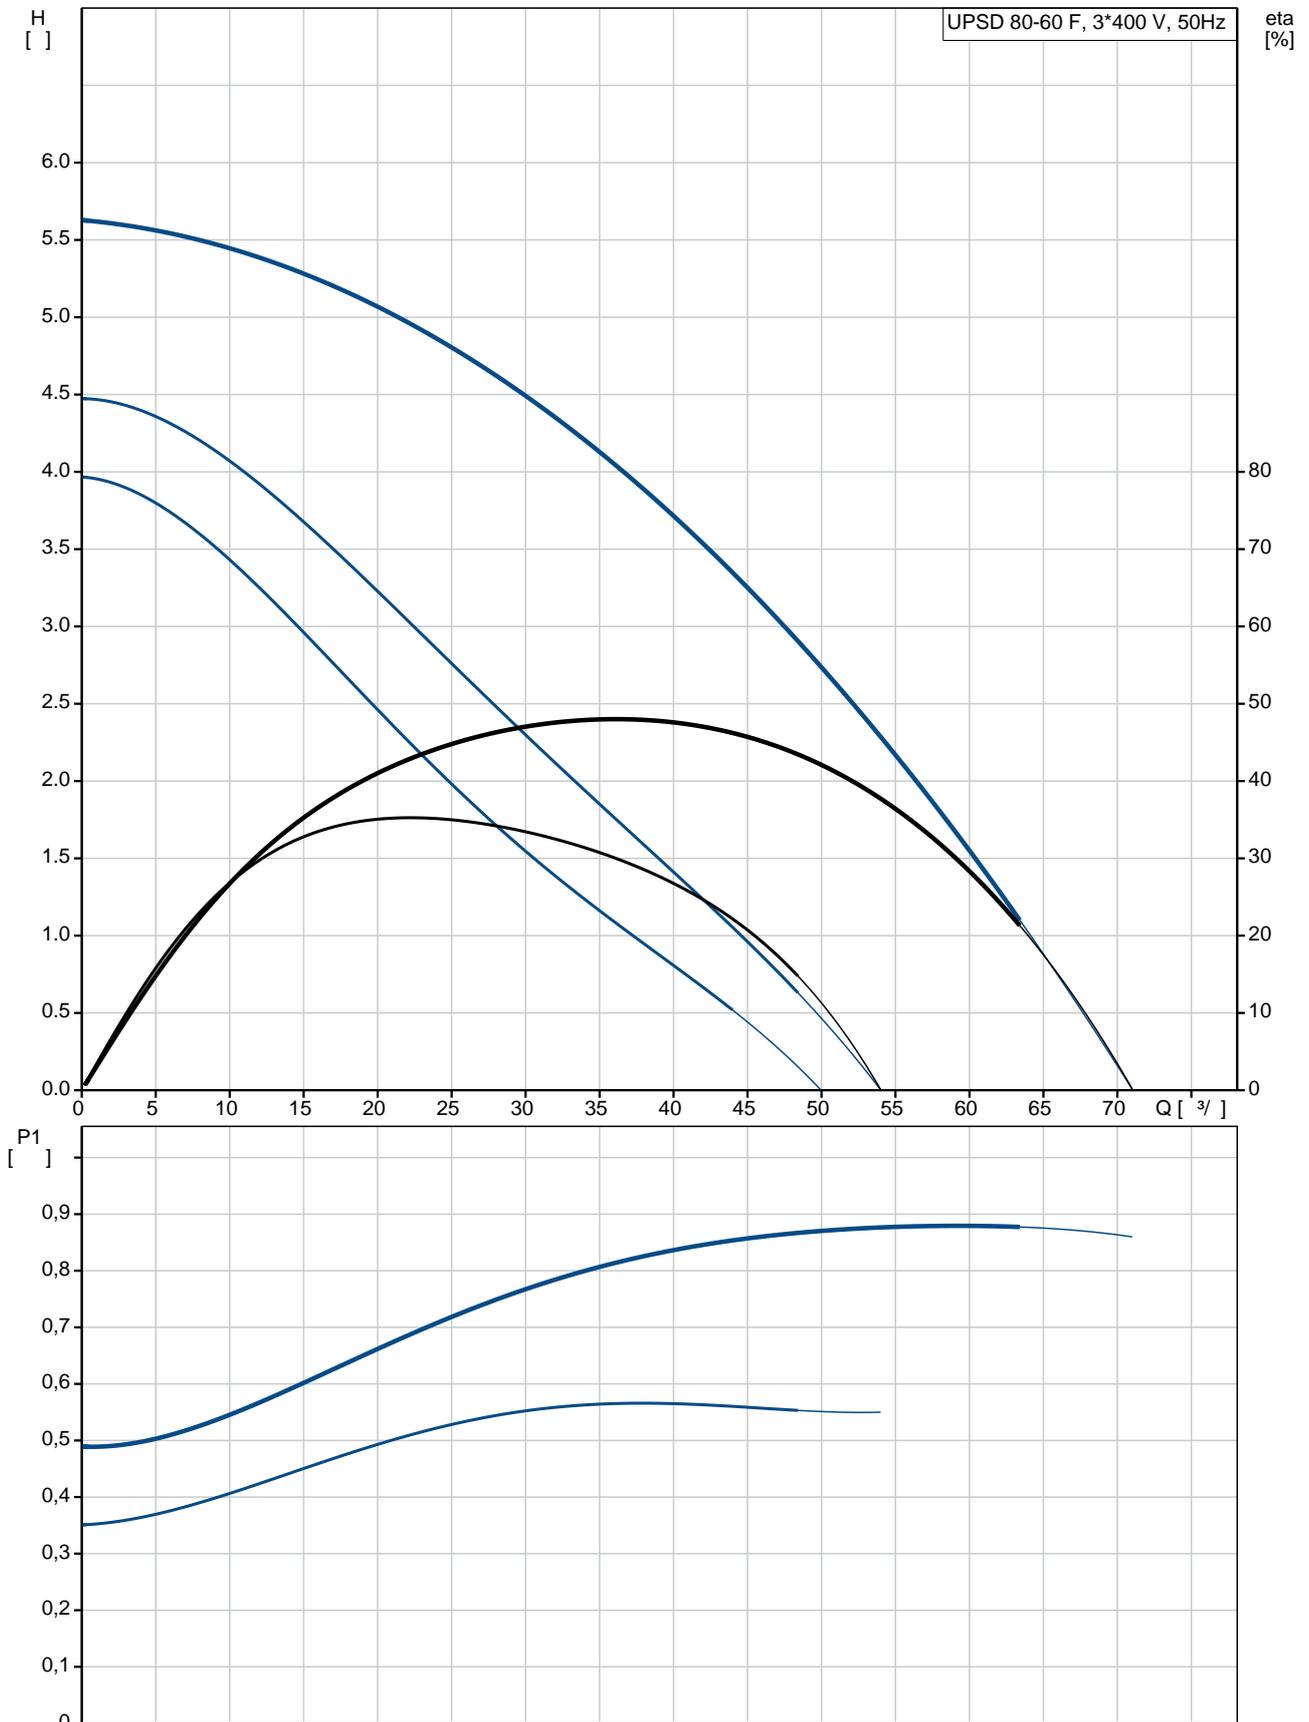

		UPSD 80-60 F
		96408952
EAN		5700390425739
		3
		60
		AAA,EAC
		EN-JL1040
		ASTM 35 B - 40 B
		DIN W.-Nr. 1.4301
		AISI 304
		0 .. 40 °C
		6
		DIN
		DN 80
		PN 6
		360
		-10 .. 120 °C
		60 °C
		983.2 / ³
		1: 470
		2: 570
		880
		50 Hz
		3 x 400-415
	1:	0.84 A
	2:	1 A
	3:	1.8 A
Cos	1:	0.81
Cos	2:	0.82
Cos		0.71
	(IEC 85):	H
	(IEC 60529):	X4D
		CONTACT
		12H
		72.5
		80.7
		0.2 ³
C		RS
		8413703000

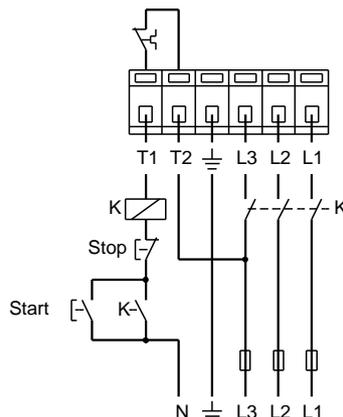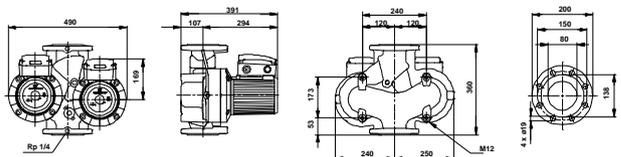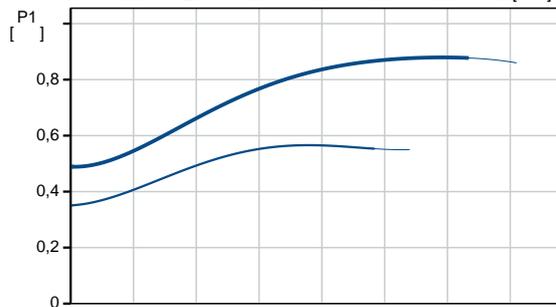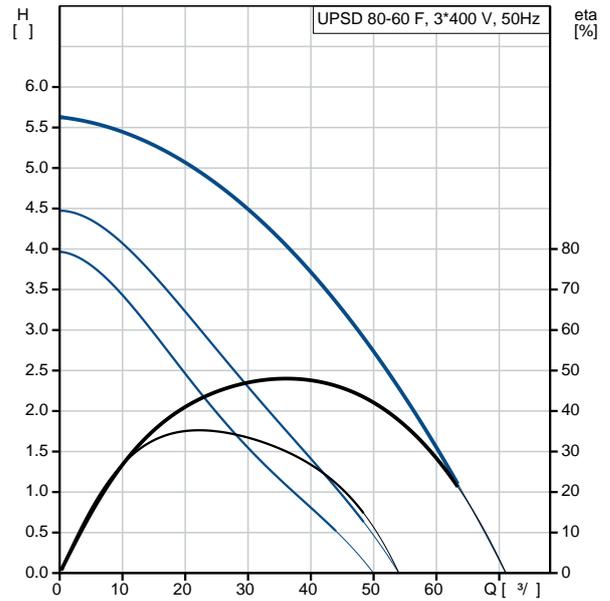

96408952 UPSD 80-60 F 50

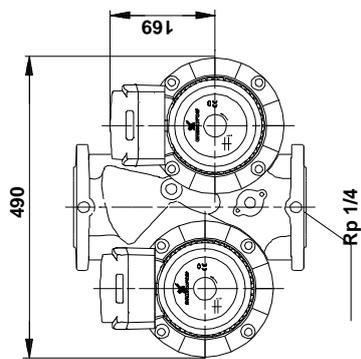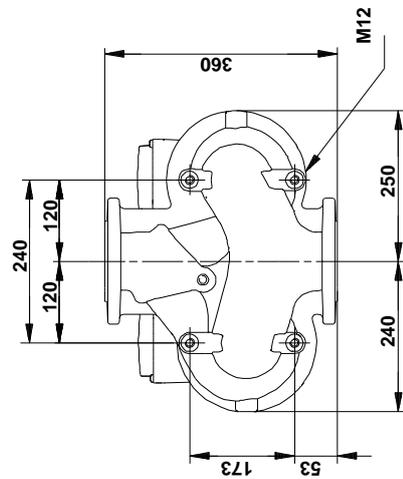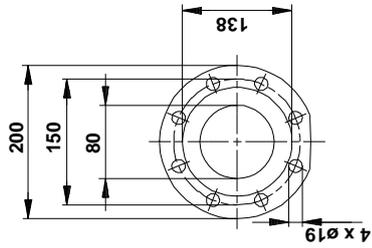

! [] :

96408952 UPSD 80-60 F 50

