

1 CRI 1S-10 A-CA-A-E-HQQE



: 96515787

(" - "),

FlexiClamps.

3-

: -20 .. 120 °C  
: 20 °C  
: 998.2 / <sup>3</sup>

: 2873 /

0.9 <sup>3</sup>/  
39.9

: HQQE  
: CE, EAC, ACS  
- : ISO9906:2012 3B

EN 1.4408  
AISI 316

:  
, EN/DIN: EN 1.4301  
, AISI/ASTM: AISI 304  
: SIC

Maximum ambient temperature: 40 °C  
: 25

- : 25 / 120 °C  
25 / -20 °C

: FlexiClamp

: DN 32

: DN 32

PN 25

: FT85


: IEC

: 71A

- : IE3

- P2: 0.37  
 ( 2), : 0.37  
 : 50 Hz  
 : 3 x 220-240D/380-415Y  
 : 1.74/1.00 A  
 : 490-530 %  
 Cos - : 0.80-0.70  
 : 2850-2880 /  
 : IE3 73,8%  
 : 73.8 %  
 3/4 : 79.0 %  
 1/2 : 75.5 %  
 : 2  
 (IEC 34-5): 55 Dust/Jetting  
 (IEC 85): F  
 : 85805102  
 :  
 Frequency converter: .  
 :  
 , MEI : 0.54  
 ( ): 19.5  
 ( ): 22.3  
 : 0.063 <sup>3</sup>

## 96515787 CRI 1S-10 A-CA-A-E-HQQE 50

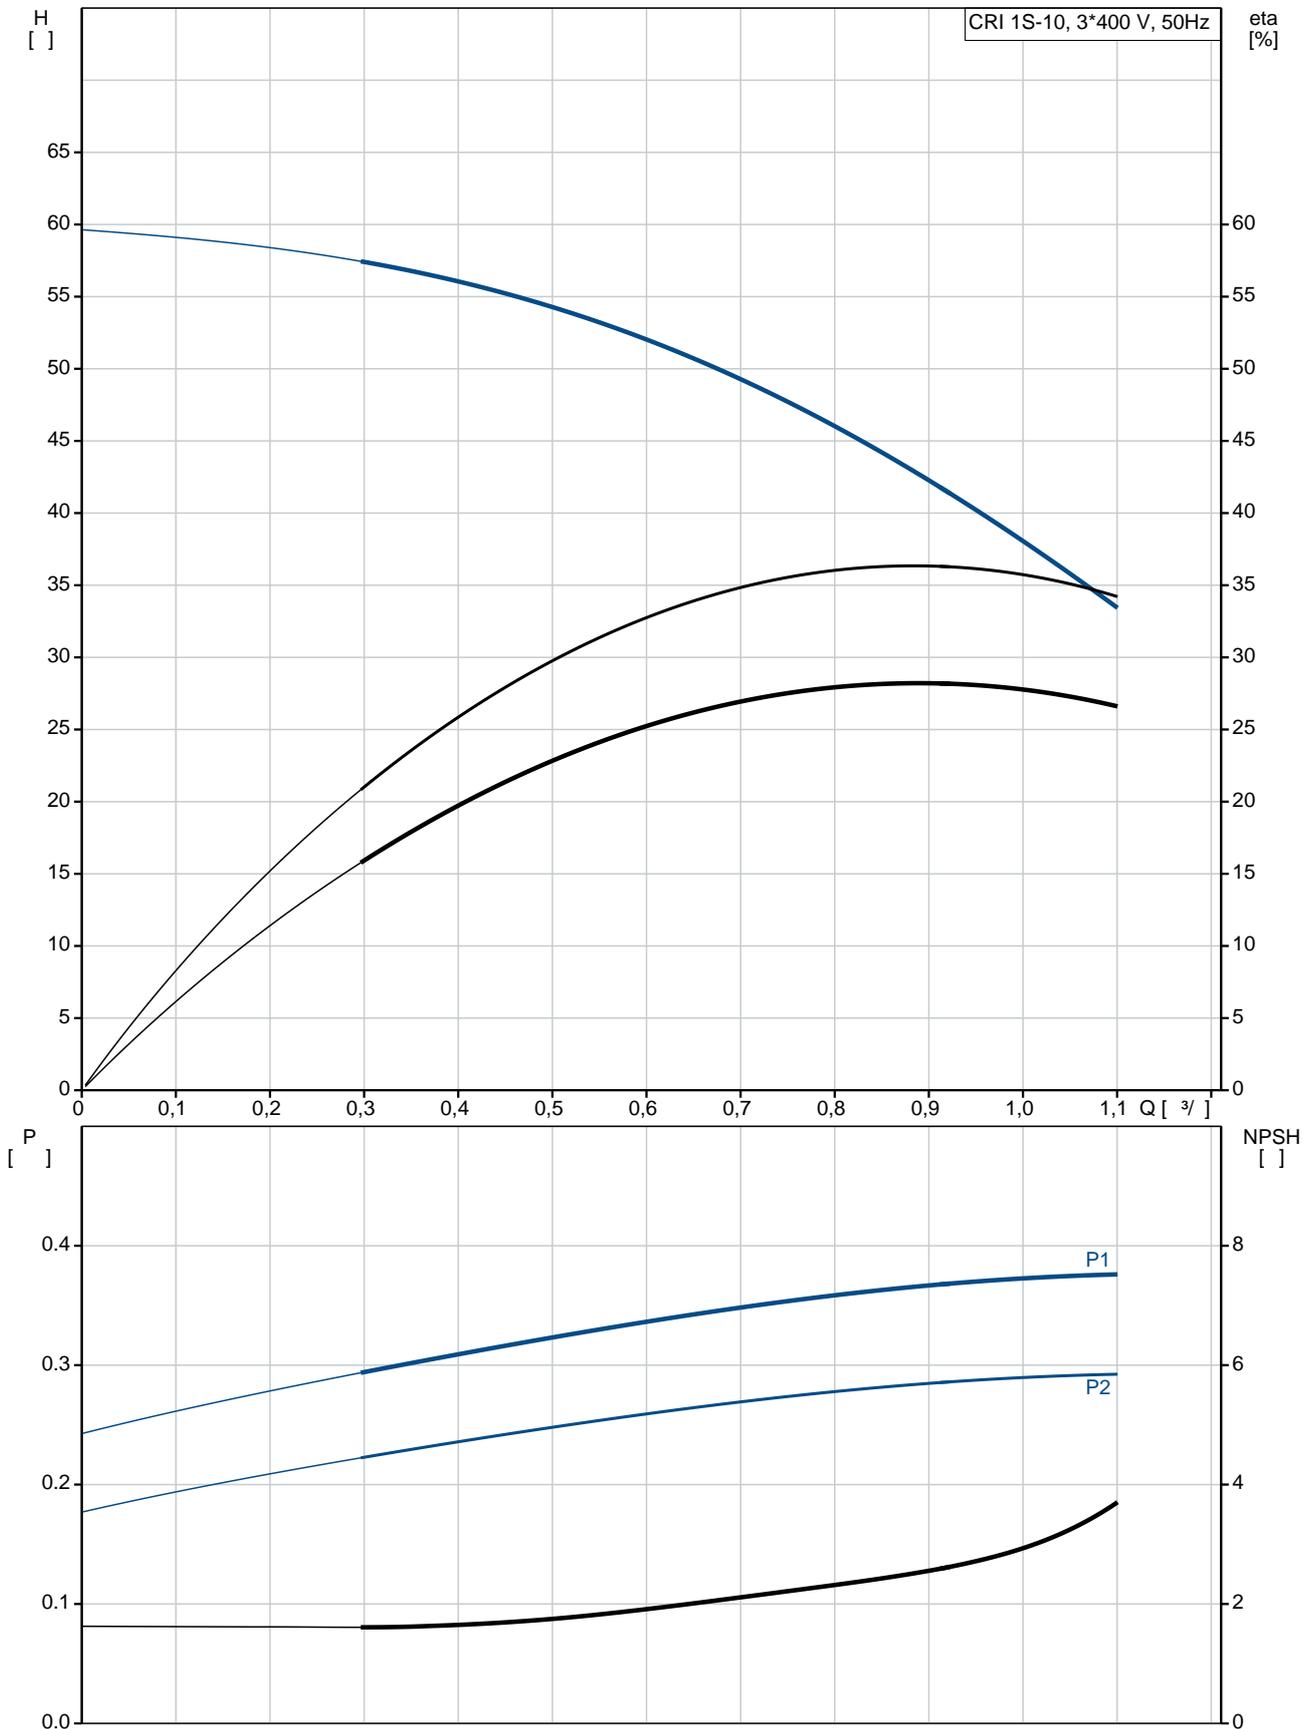

CRI 1S-10  
A-CA-A-E-HQQE  
96515787  
EAN : 5700396731414

2873 /  
0.9 <sup>3/</sup>  
39.9  
58.9  
10  
10

Low NPSH: N

HQQE  
CE, EAC, ACS  
ISO9906:2012 3B  
A  
A

EN 1.4408  
AISI 316

EN/DIN: EN 1.4301  
AISI/ASTM: AISI 304

A  
E  
SIC

Maximum ambient temperature: 40 °C  
25  
25 / 120 °C  
25 / -20 °C





FlexiClamp  
DN 32  
DN 32  
PN 25  
FT85  
CA

-20 .. 120 °C  
20 °C  
998.2 / <sup>3</sup>

IEC  
71A  
IE3


- P2: 0.37

( 2), 0.37

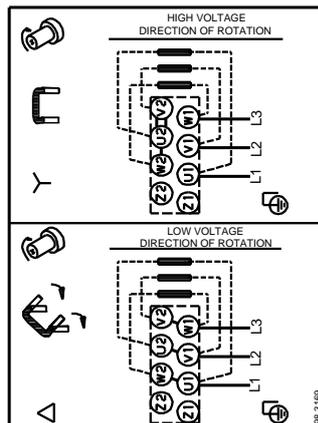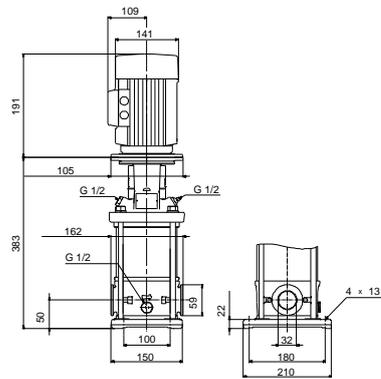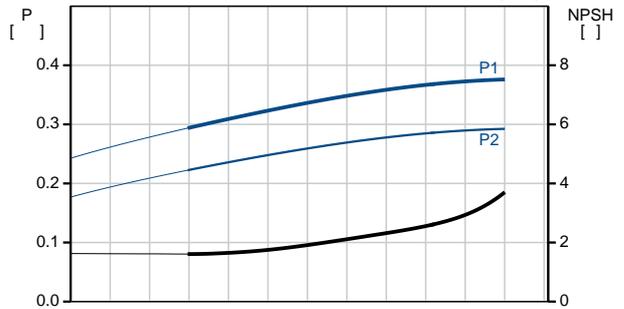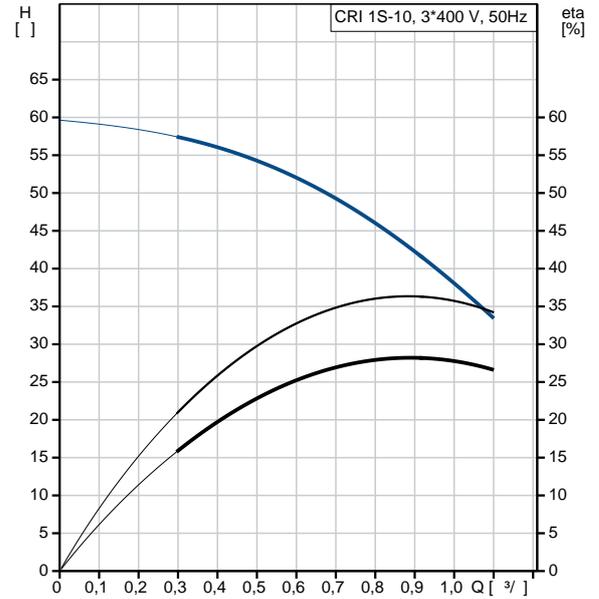

	:	50 Hz
	:	3 x 220-240D/380-415Y
	:	1.74/1.00 A
	:	490-530 %
Cos	-	: 0.80-0.70
	:	2850-2880 /
	:	IE3 73,8%
	:	73.8 %
	:	3/4
1/2	:	79.0 %
	:	75.5 %
	:	2
	:	(IEC 34-5): 55 Dust/Jetting
	:	(IEC 85): F
	:	.
	:	85805102
	:	.
	:	.
MEI	:	' 0.54
( ):	:	19.5
( ):	:	22.3
	:	0.063 <sup>3</sup>

## 96515787 CRI 1S-10 A-CA-A-E-HQQE 50

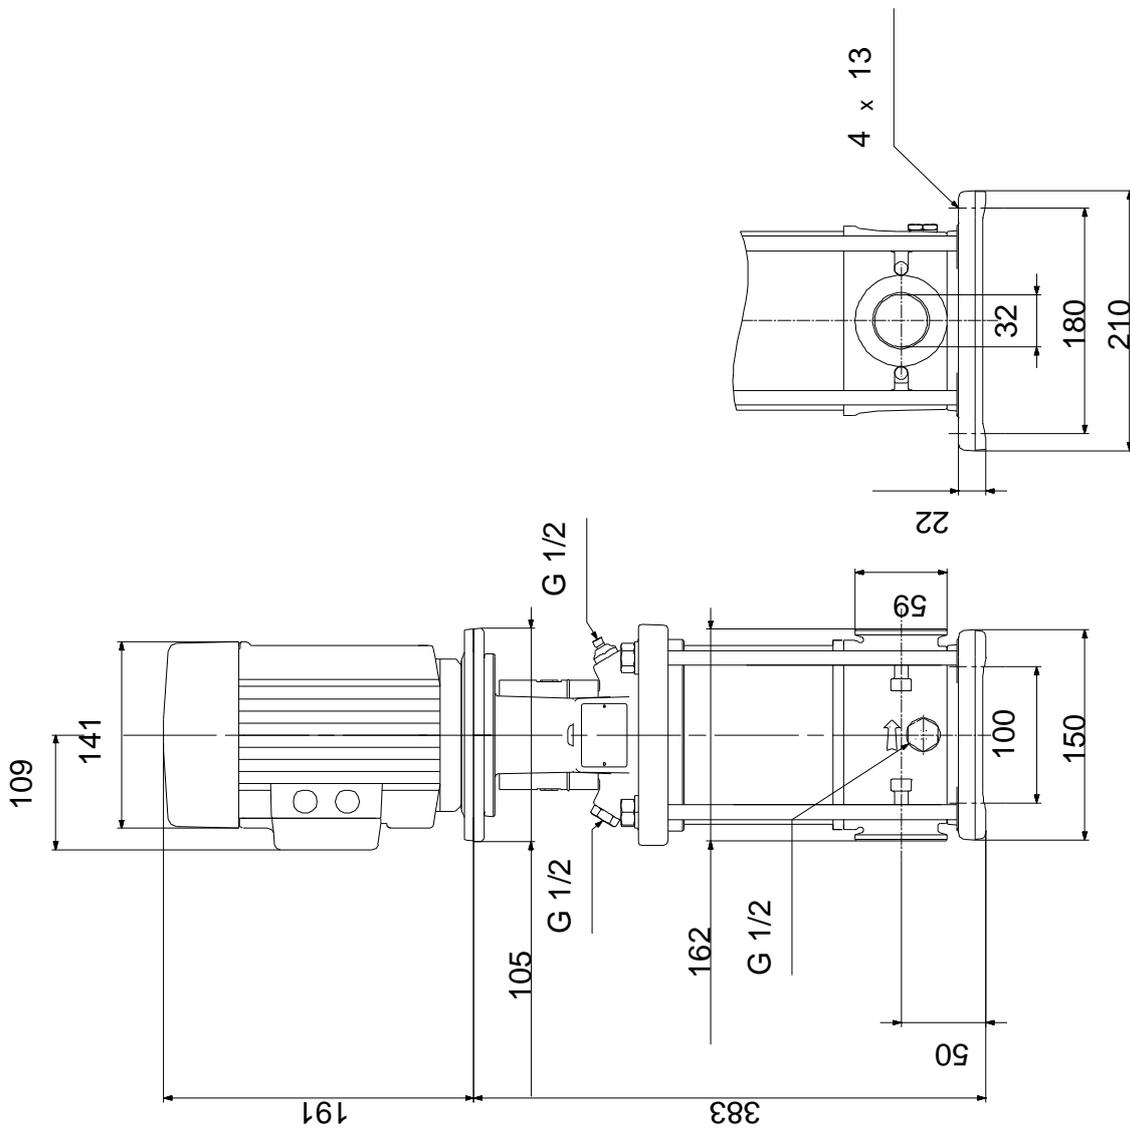

## 96515787 CRI 1S-10 A-CA-A-E-HQQE 50

