

1 **SOLOLIFT2 WC-3**



: 97775315

Sololift2 WC-3 -

Sololift2 WC-3

Sololift2 WC-3

- ()
- Ø22-40
- « »
- DN100
- () Ø36 40
- ()
-
-
-

EN12050-2,

Maximum liquid temperature: 50 °C
998.2 / 3


: CE,TR,VDEEMV,VDE,MORO
- : ISO9906:2012 3B

32/36/40, 36/40/50, DN 100
22/25/28/32/36/40
3X0,75MM2


- P1: 620
50 Hz
1 x 220-240
3 A
Cos phi - : 0.92
2800 /
(IEC 34-5): IP44
(IEC 85): F
1.2
H05VV-F-3G
SCHUKO

7.74
9.27
Danish VVS No.: 614363632
Swedish RSK No.: 5886546
Finnish LVI No.: 4965313
Norwegian NRF no.: 9045715
C : RS
8413702100


97775315 SOLOLIFT2 WC-3 50

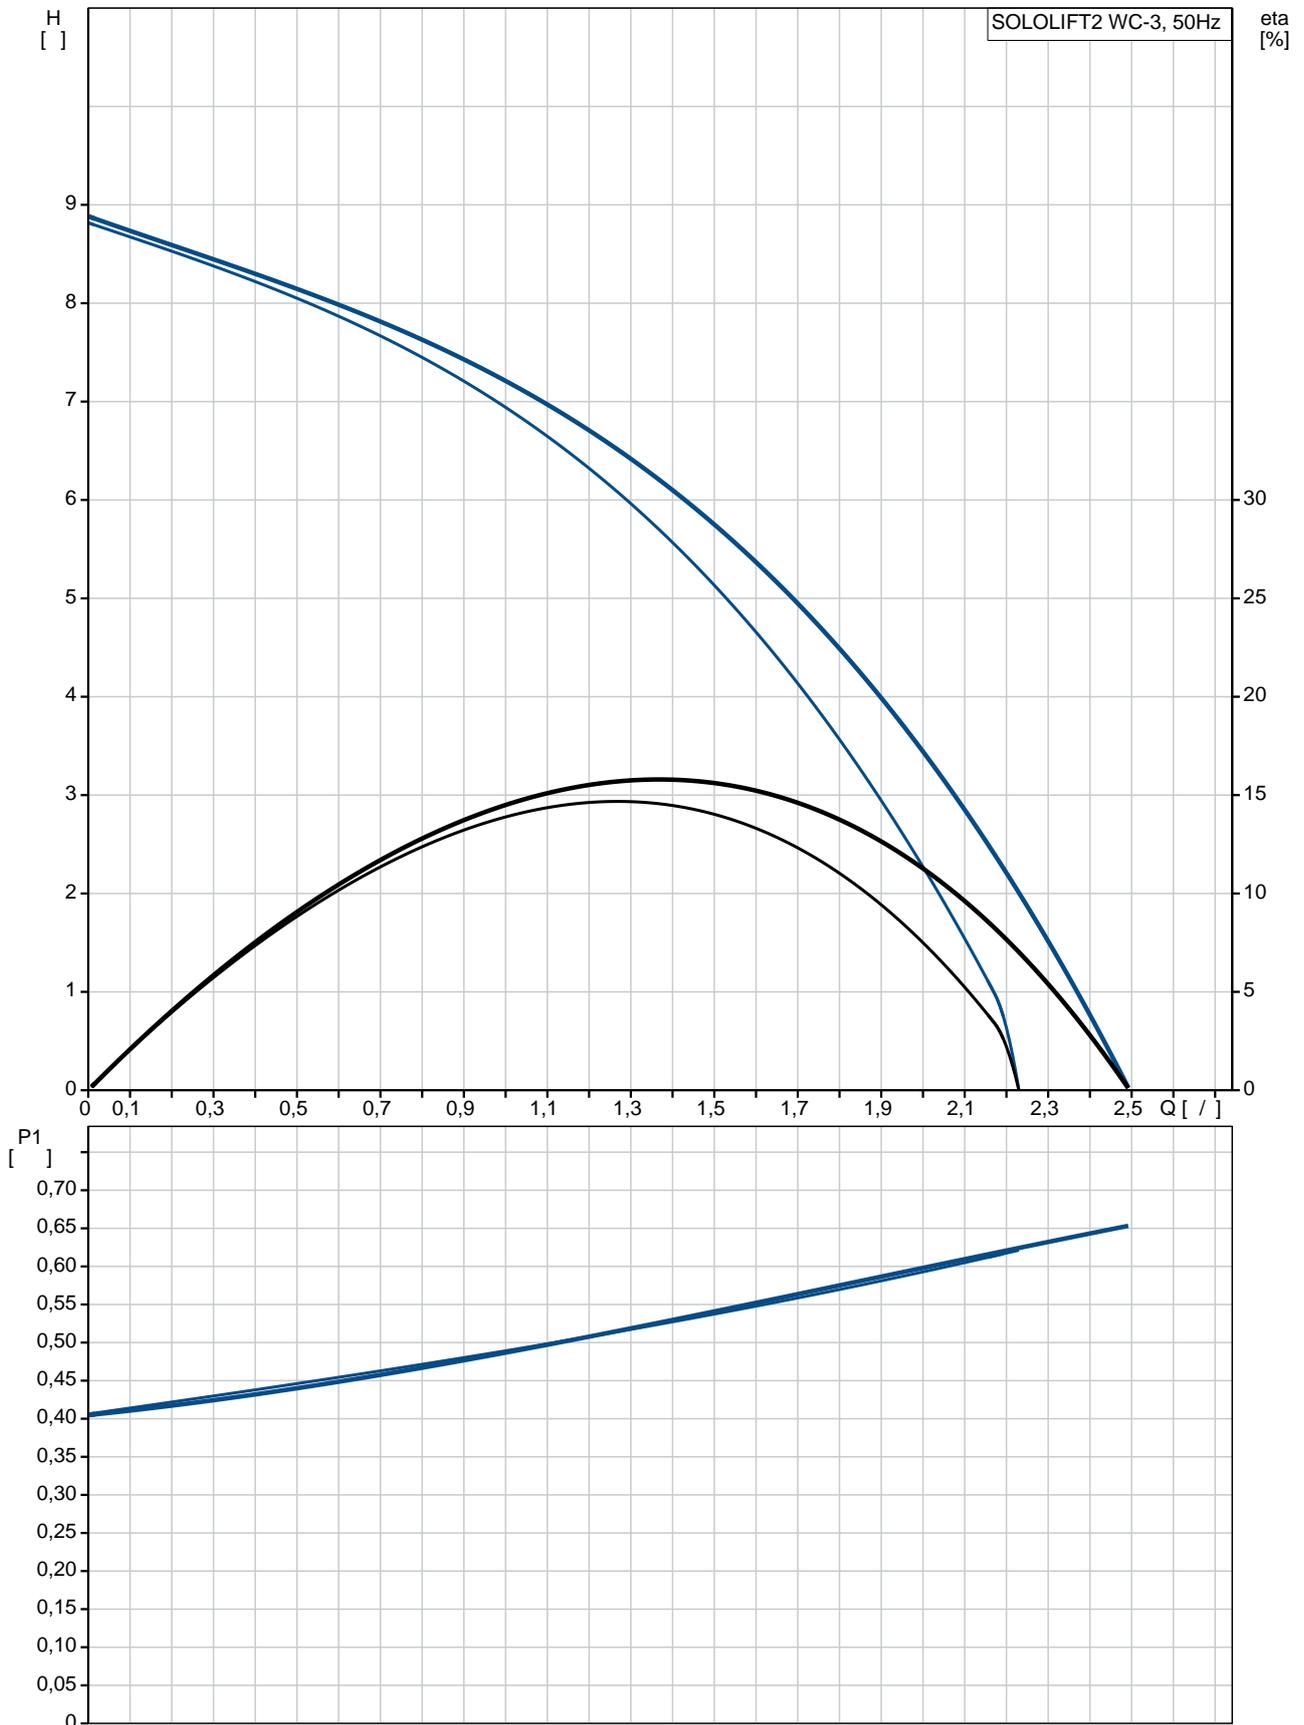

	SOLOLIFT2 WC-3
	97775315
EAN	5710624187241
	UER 367
	8.5
	: CE,TR,VDEEMV,VDE,MORO
	- : ISO9906:2012 3B
	32/36/40, 36/40/50, DN 100
	22/25/28/32/36/40
	3X0,75MM2
Maximum liquid temperature:	50 °C
	998.2 / ³
	- P1: 620
	: 50 Hz
	: 1 x 220-240
	: 3 A
Cos phi -	: 0.92
	: 2800 /
	(IEC 34-5): IP44
	(IEC 85): F
	: THERMIK S06-150-05
	: 1.2
	: H05VV-F-3G
	: SCHUKO
	: 7.74
	: 9.27
Danish VVS No.:	614363632
Swedish RSK No.:	5886546
Finnish LVI No.:	4965313
Norwegian NRF no.:	9045715
C	: RS
	: 8413702100

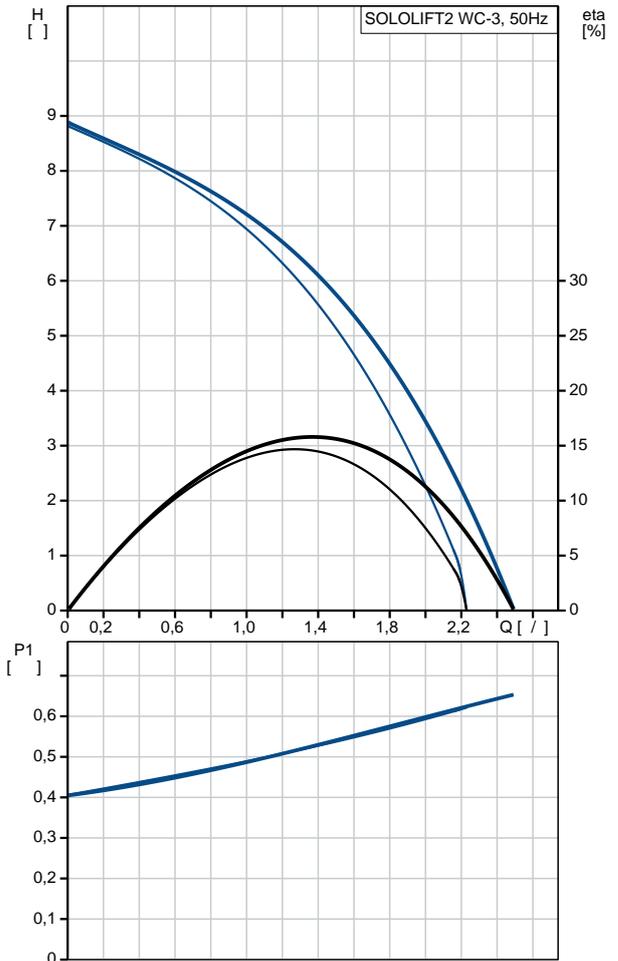

97775315 SOLOLIFT2 WC-3 50

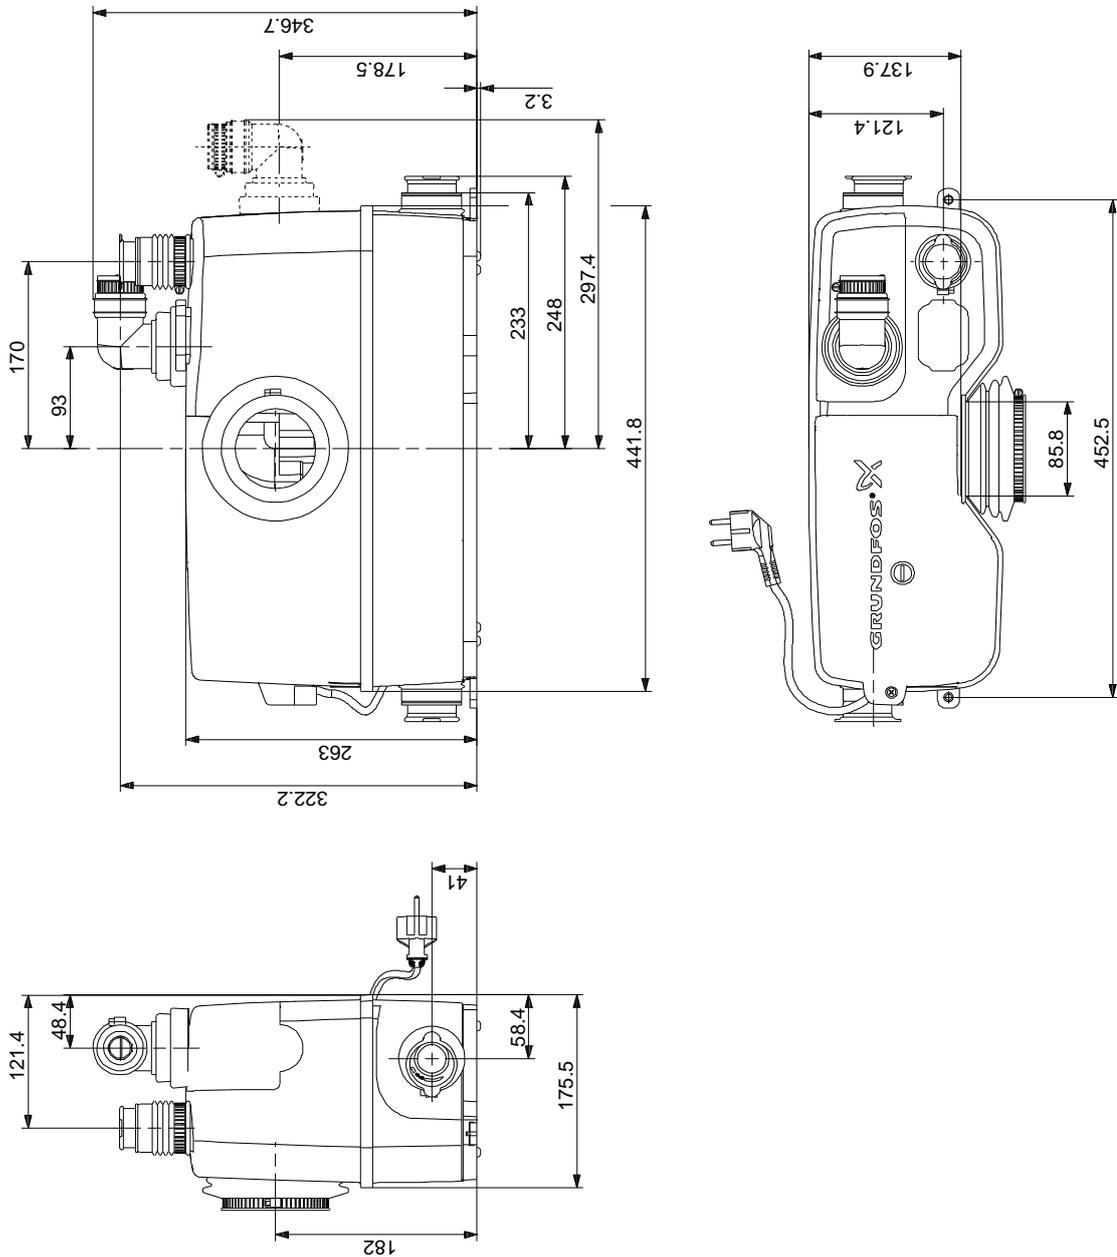

97775315 SOLOLIFT2 WC-3 50

