

1

: SBA 3-45 AW



: 97896312

Grundfos SBA 3-45 AW —

SBA,  
SB,

SBA

SBA 3-45 AW

15

— 0 °C 10 40 °C.

2,2

SBA 3-45 AW —

— 1


« »

/




: 0 .. 40 °C  
: 20 °C  
998.2 / <sup>3</sup>

:  
 : 2.83 <sup>3</sup>/<sub>l</sub>  
 : 30.1  
 : 1  
 : CE,VDE,WEEE  
 - : ISO9906:2012 3B  
 Return valve:  
 Adjustable start pressure: N  
 : 2.2  
 : 2800 /  
 :  
 : Composite  
 :  
 : -10 .. 50 °C  
 Type of inlet connection: FLOATING STRAINER  
 : G 1"  
 : 10  
 :  
 P1: 1.05  
 Rated power - P2: 0.62  
 : 50 Hz  
 : 1 x 220-240  
 : 4.8 A  
 : 12 A  
 Cos : 0.94  
 : 13 /450  
 (IEC 34-5): IP68  
 (IEC 85): F  
 Built-in motor protection:  
 Length of cable: 15  
 : H07RN-F 3G1  
 : SCHUKO  
 :  
 ( ): 9.83  
 ( ): 10.6  
 : 0.031 <sup>3</sup>  
 Danish VVS No.: 391368045  
 Swedish RSK No.: 5850423  
 Finnish LVI No.: 4822548  
 Norwegian NRF no.: 9041858  
 C : IT  
 : 8413702900

## 97896312 SBA 3-45 AW 50

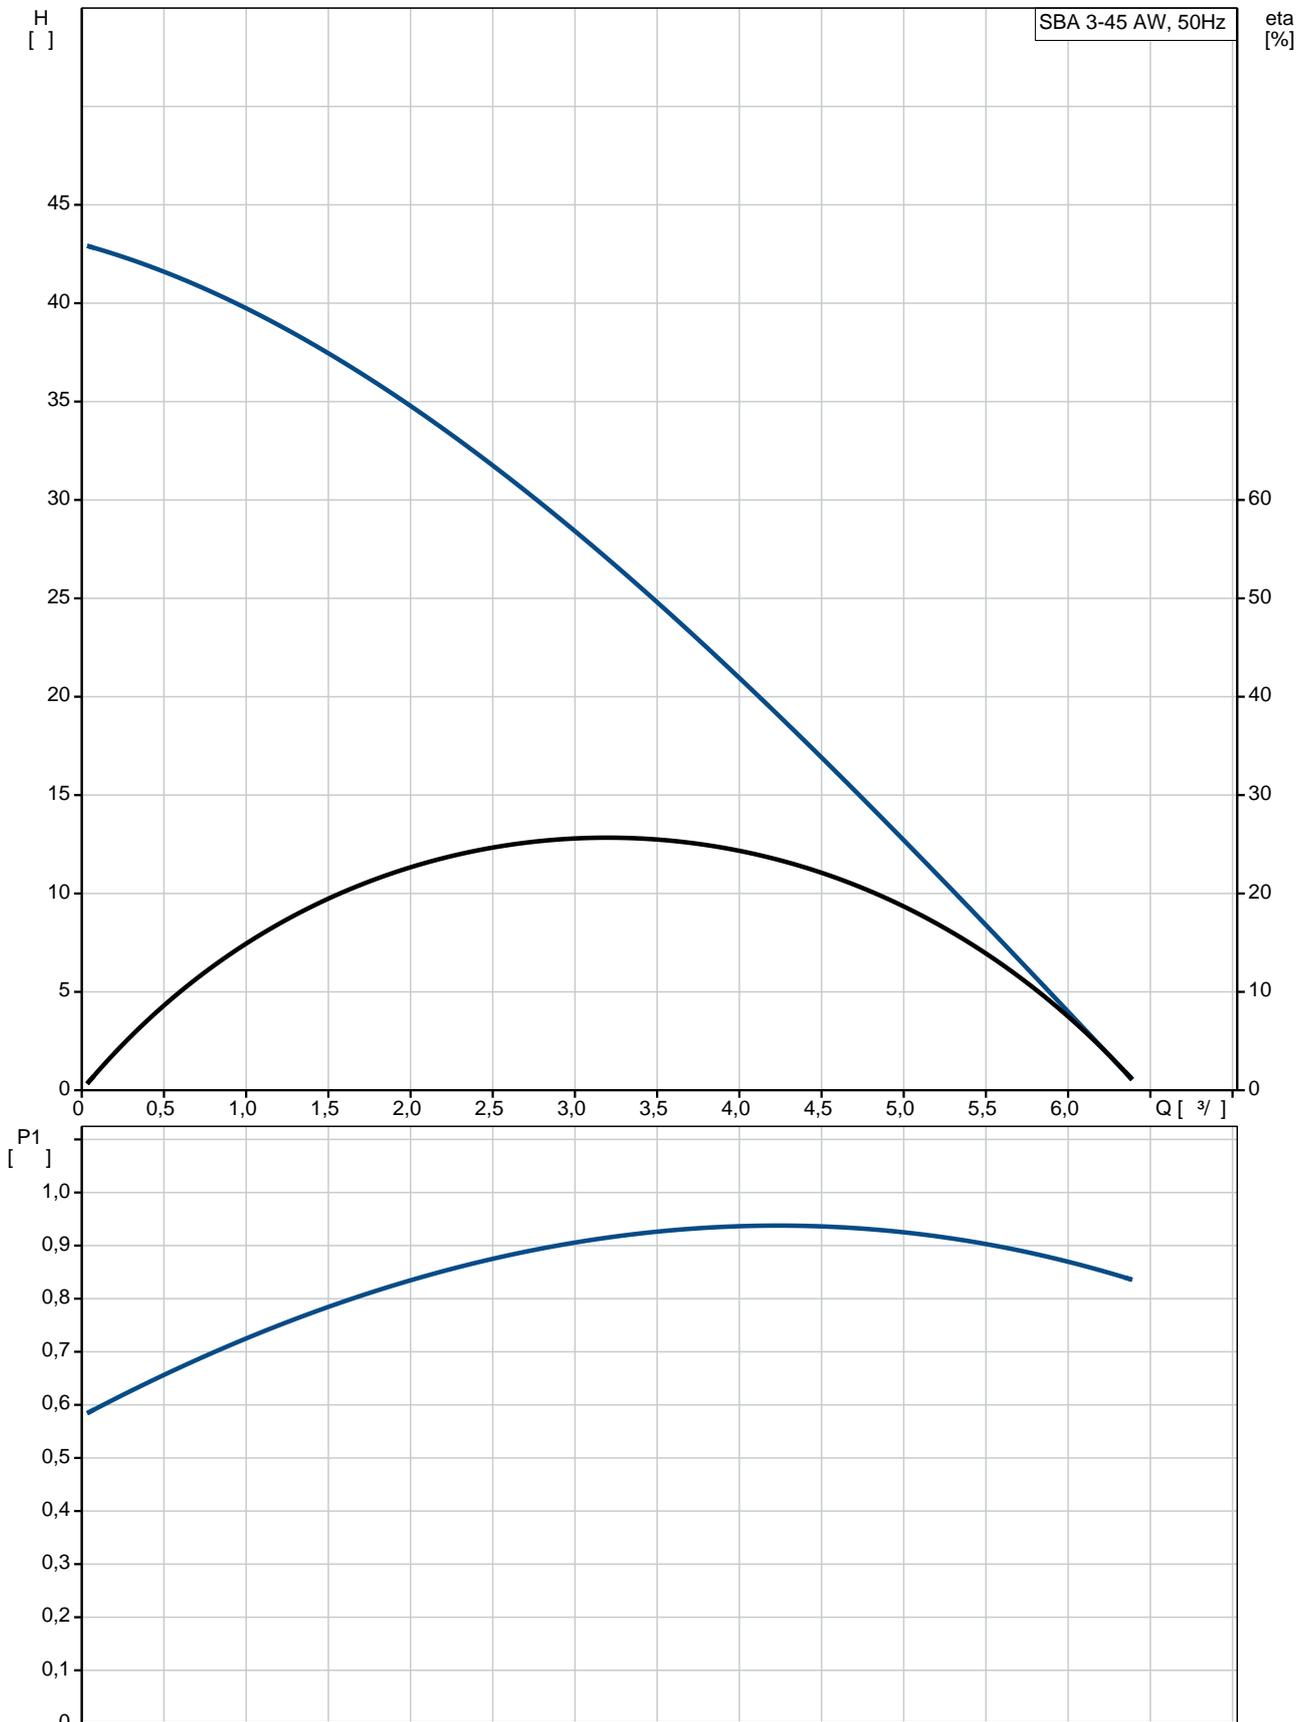

		SBA 3-45 AW
		97896312
EAN	:	5710626001774
		2.83 <sup>3</sup> /
		30.1
		45
		4
		1
		CE, VDE, WEEE
		ISO9906:2012 3B
Return valve:		
Adjustable start pressure:		N
		2.2
		2800 /
		Composite
		-10 .. 50 °C
Type of inlet connection: FLOATING STRAINER		
		G 1"
		10
		0 .. 40 °C
		20 °C
		998.2 / <sup>3</sup>
pH:		4-9
P1:		1.05
Rated power - P2:		0.62
		50 Hz
		1 x 220-240
		4.8 A
		12 A
Cos		0.94
		13 /450
(IEC 34-5):		IP68
(IEC 85):		F
Built-in motor protection:		
Length of cable:		15
		H07RN-F 3G1
		SCHUKO
( ):		9.83
( ):		10.6
		0.031 <sup>3</sup>
Danish VVS No.:		391368045
Swedish RSK No.:		5850423
Finnish LVI No.:		4822548
Norwegian NRF no.:		9041858
C		IT

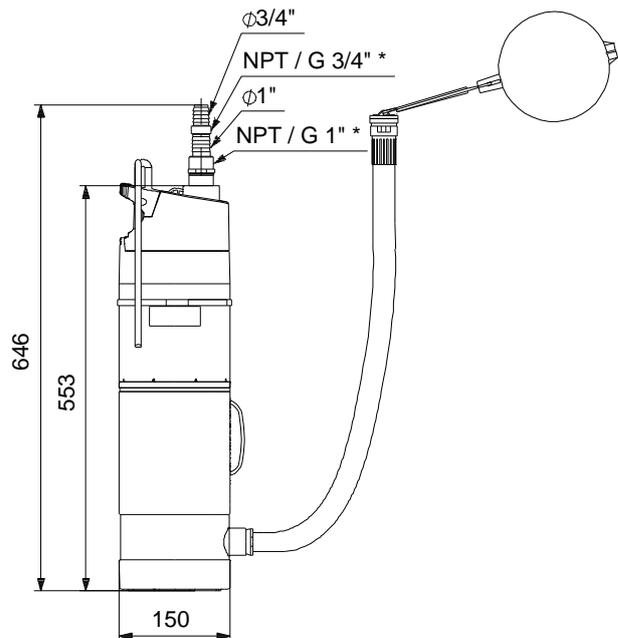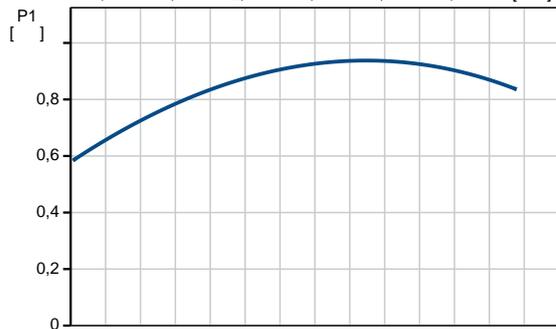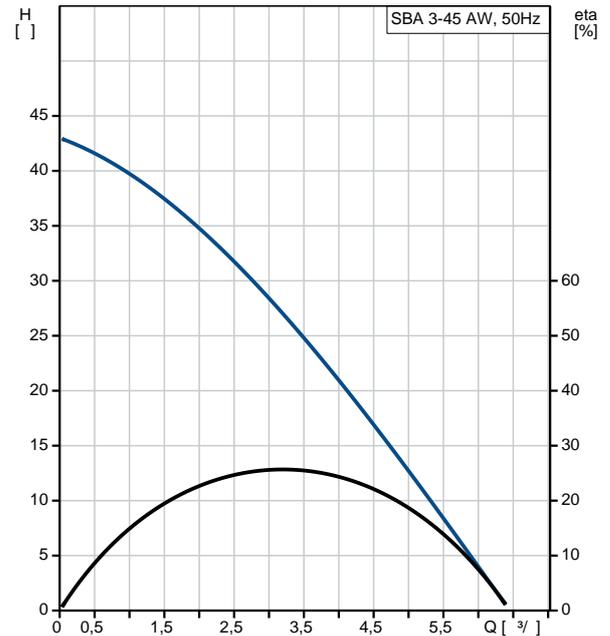



: 8413702900

**97896312 SBA 3-45 AW 50**

