

1

: SB BOOSTER 3-45AW, PM1 22



: 97904043

Grundfos SB BOOSTER 3-45AW, PM1 22 —

: SB BOOSTER 3-45AW, PM1 22

15  
— 0 °C 10 40 °C °C.

: SB BOOSTER 3-45AW, PM1 22 —

— 1

: 0 .. 40 °C °C  
: 20 °C  
998.2 / 3

: 2.83 3/  
30.1  
: 1

- : CE,WEEE  
: ISO9906:2012 3B

Return valve:

: 2800 /

Composite

Temperature range: -10 .. 50 °C


Type of inlet connection: FLOATING STRAINER  
G 1"  
: 10

P1: 0.8  
Rated power - P2: 0.54  
: 50 Hz  
: 1 x 220-240  
: 4.8 A  
: 12 A  
Cos : 0.94  
: 13 /450  
(IEC 34-5): IP68  
(IEC 85): F




Built-in motor protection:  
Length of cable: 15  
: H07RN-F 3G1  
: SCHUKO

( ): 9.83  
( ): 10.6

## 97904043 SB BOOSTER 3-45AW, PM1 22 50

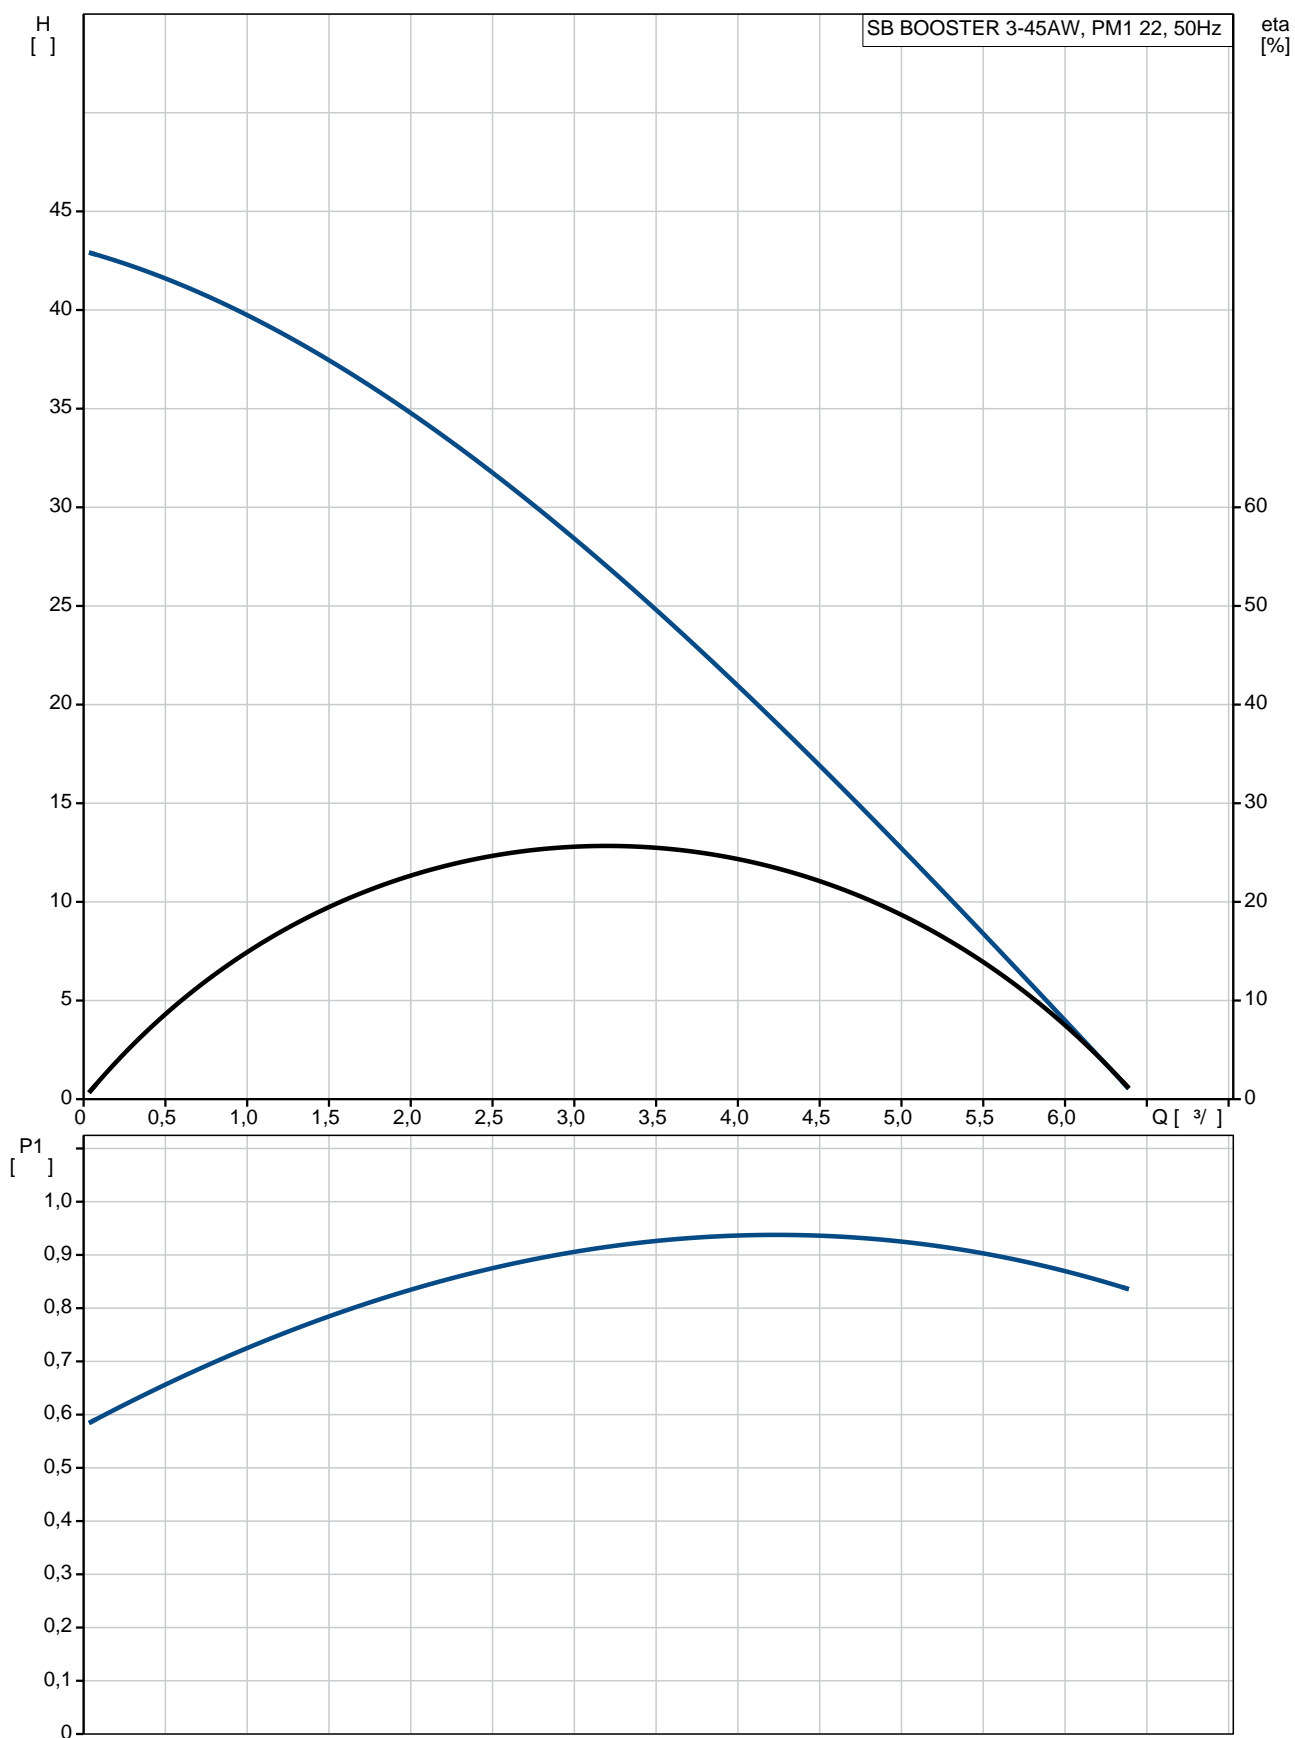

		SB BOOSTER 3-45AW, PM1 22
		97904043
EAN	:	5710626123124
	:	2.83 <sup>3</sup> /
	:	30.1
	:	45
	:	4
	:	1
	:	CE, WEEE
	:	ISO9906:2012 3B
Return valve:		
	:	2800 /
	:	Composite
	:	-10 .. 50 °C
Type of inlet connection:	:	FLOATING STRAINER
	:	G 1"
	:	10
	:	S
	:	0 .. 40 °C °C
	:	20 °C
	:	998.2 / <sup>3</sup>
	:	pH: 4-9
P1:	:	0.8
Rated power - P2:	:	0.54
	:	50 Hz
	:	1 x 220-240
	:	4.8 A
	:	12 A
Cos	:	0.94
	:	13 /450
	:	(IEC 34-5): IP68
	:	(IEC 85): F
Built-in motor protection:		
Length of cable:	:	15
	:	H07RN-F 3G1
	:	SCHUKO
	:	9.83
	:	10.6

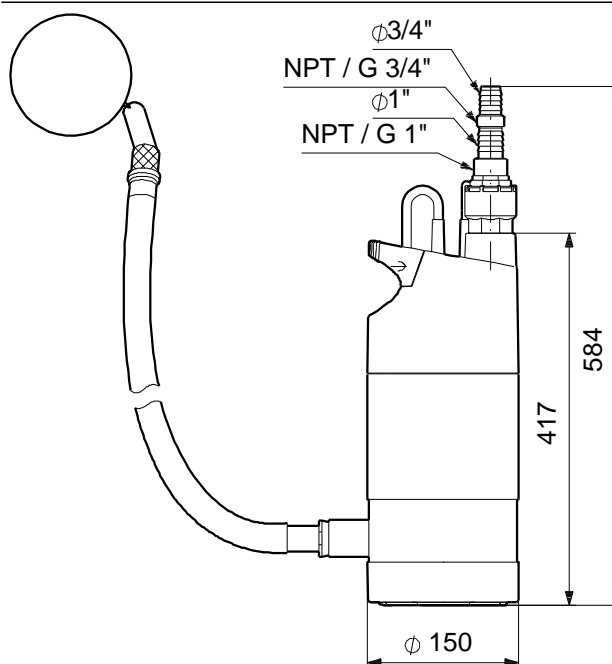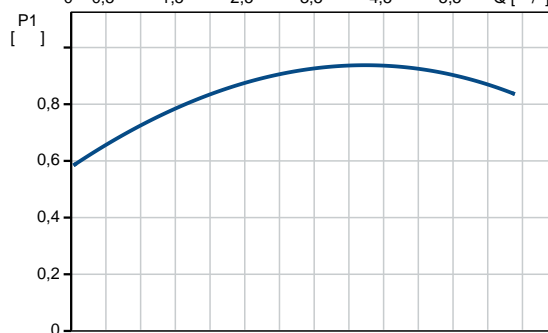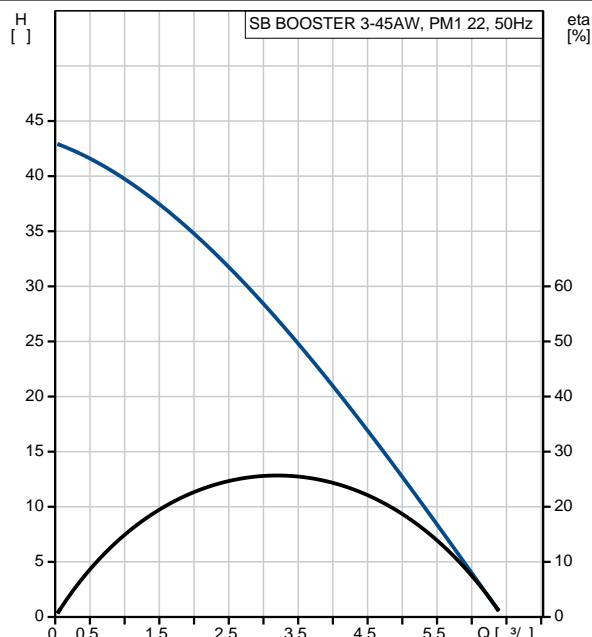

**97904043 SB BOOSTER 3-45AW, PM1 22 50**

