

1 CONLIFT1



: 97936156

Conlift1

Conlift1

-
-
-
-
-
-
-
-
-
-
-

pH 2,5.

pH 2,5 Conlift2 pH+.

Maximum liquid temperature: 50° °C
998.2 / 3

: VDE, GOST


18-30
8-10

- P1: 75
: 50 Hz
: 1 x 230
: 0.65 A
(IEC 34-5): IP24
(IEC 85): F
: 1.7
: SCHUKO


(): 2.65

4.1
Danish VVS No.: 385651100
Finnish LVI No.: 4965326
Norwegian NRF no.: 9045396
C : CN
: 8413702100




97936156 CONLIFT1 50

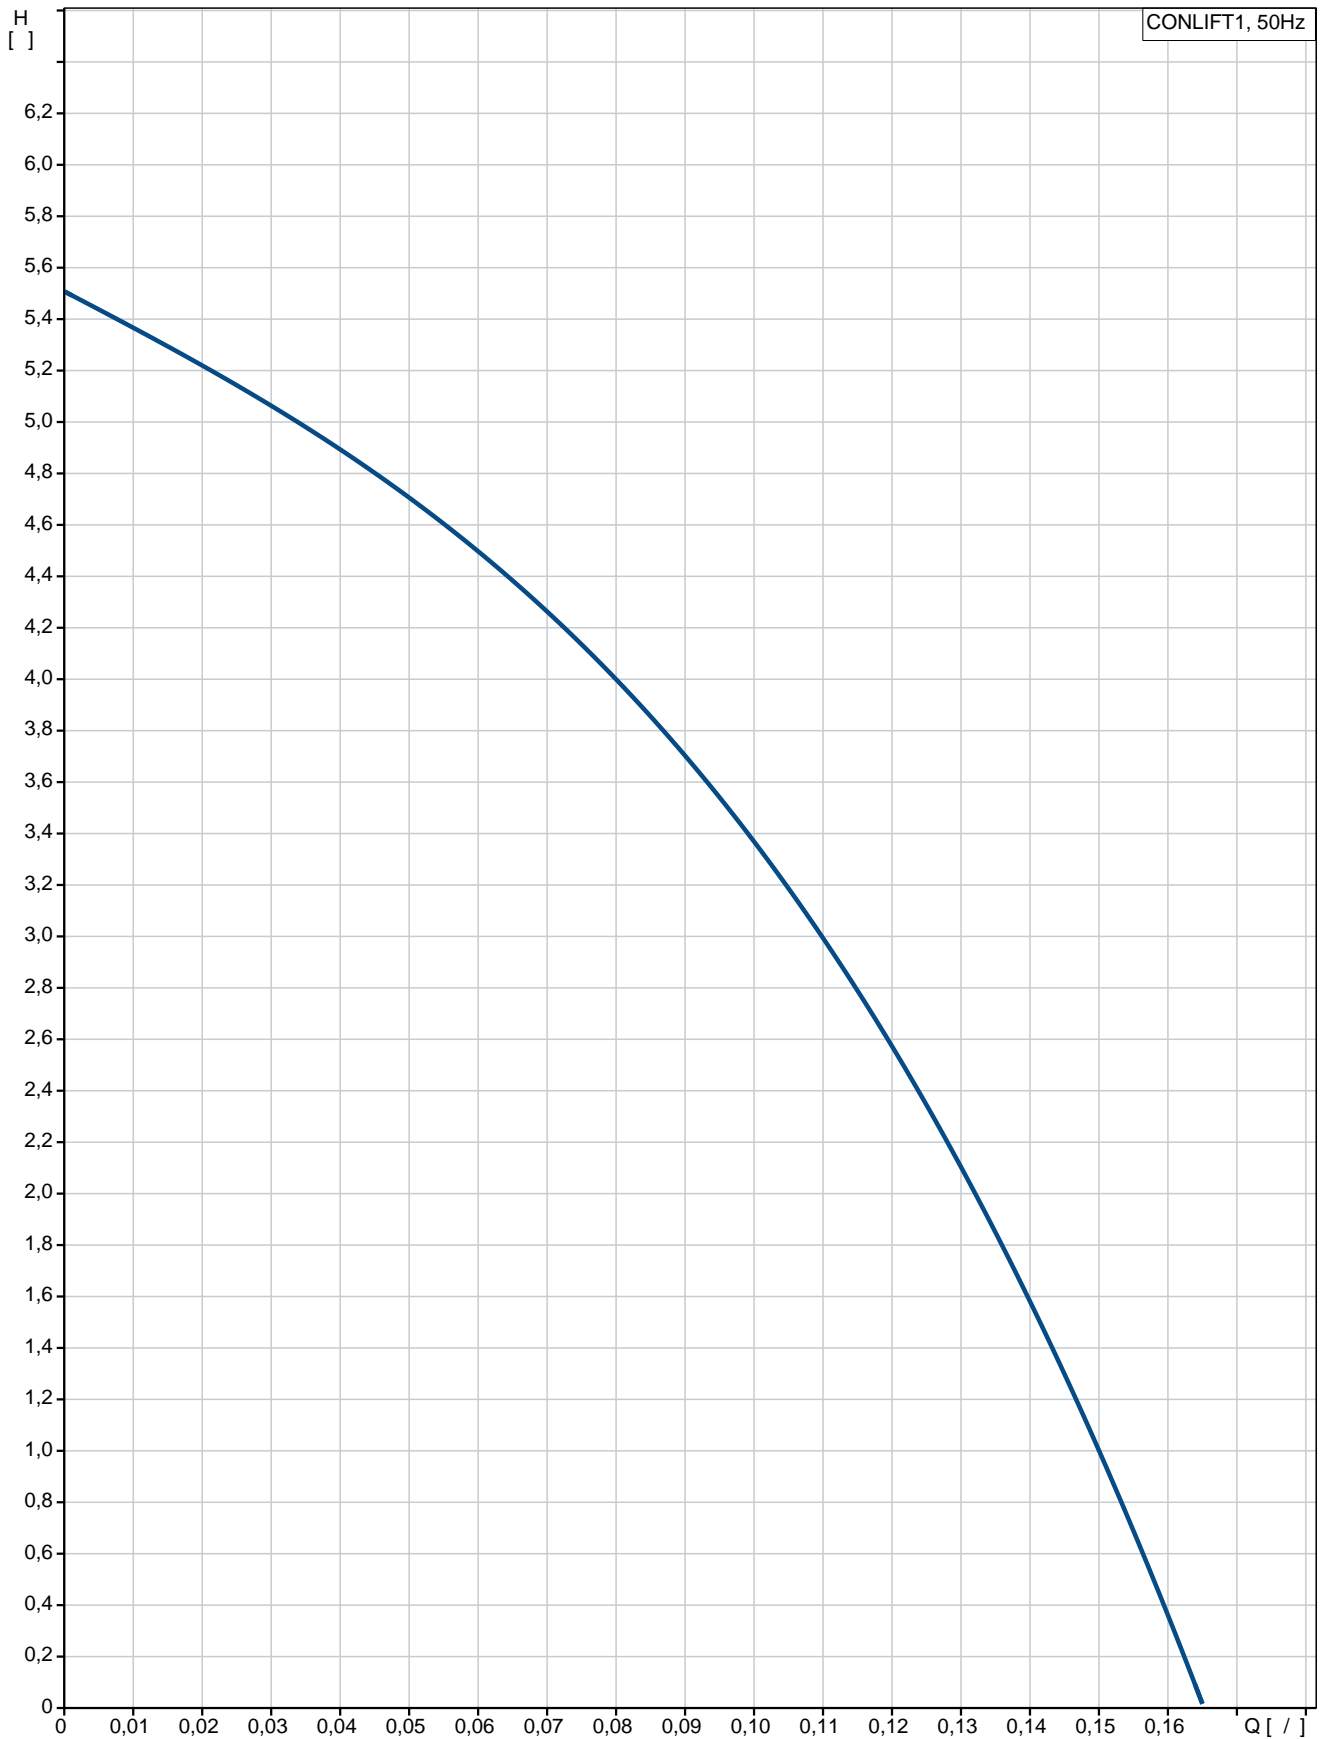


	CONLIFT1
	97936156
EAN	5710626733828
	UER 76
Maximum flow:	0.167 /
Ma	0.167 /
	5.5
	VDE, GOST
	18-30
	8-10
Maximum liquid temperature:	50° °C
	998.2 / ³
pH:	2.7
	- P1: 75
	50 Hz
	1 x 230
	0.65 A
	(IEC 34-5): IP24
	(IEC 85): F
	1.7
	SCHUKO
	H05W-F36
	(): 2.65
	4.1
Danish VVS No.:	385651100
Finnish LVI No.:	4965326
Norwegian NRF no.:	9045396
C	CN
	8413702100

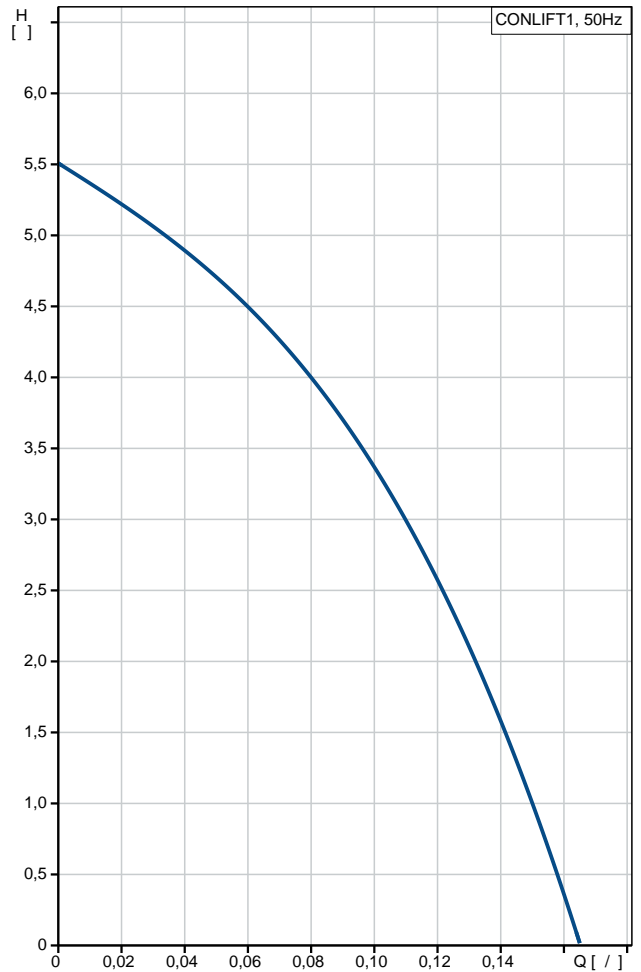

97936156 CONLIFT1 50

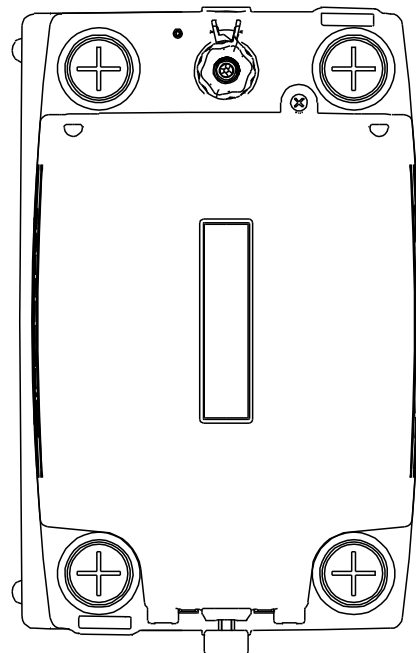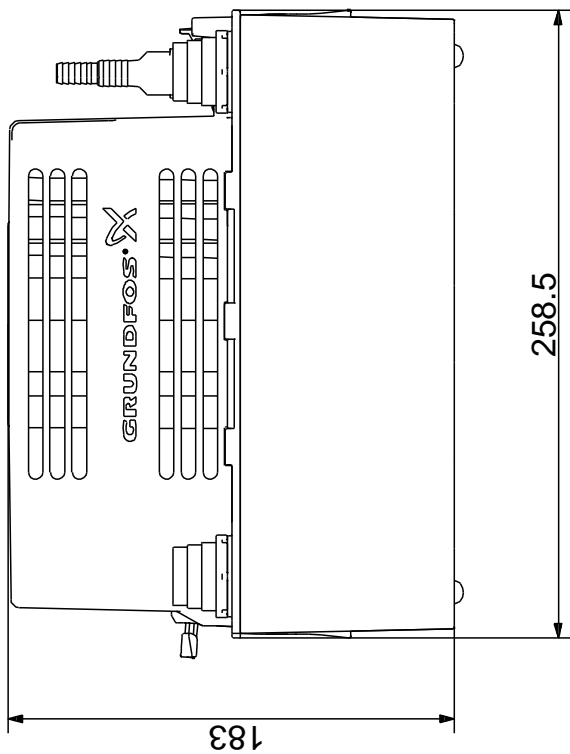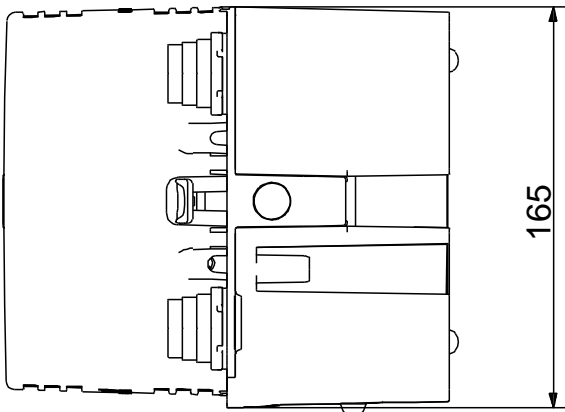

97936156 CONLIFT1 50

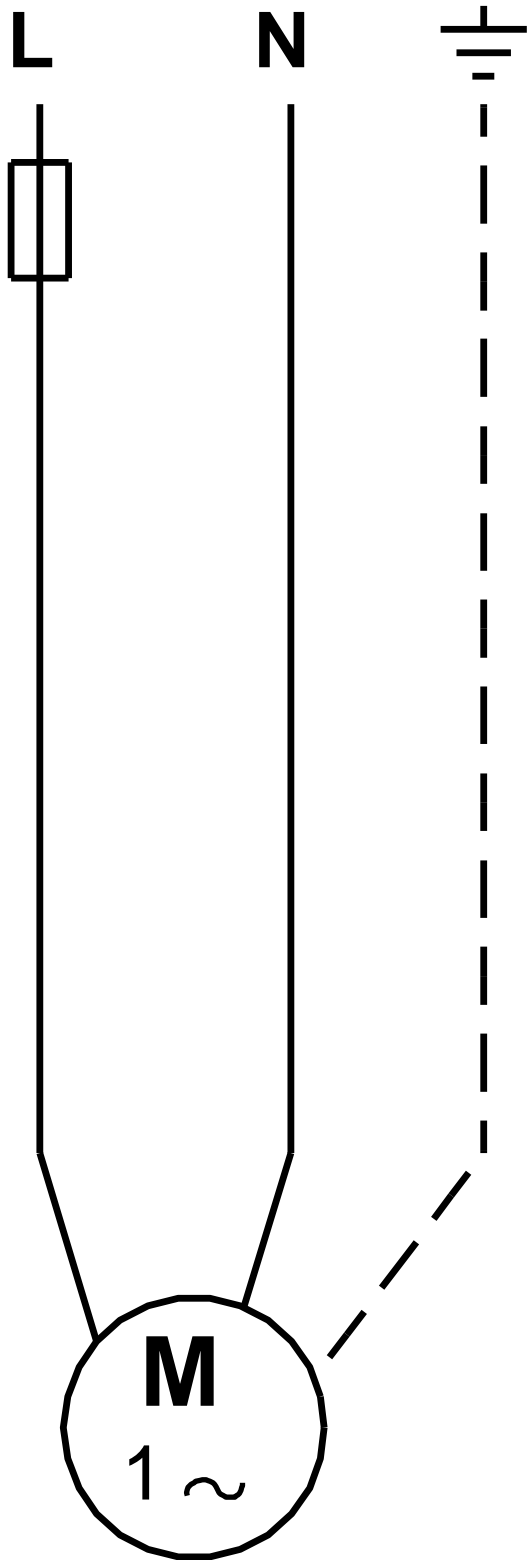

! [], .