

1 TPE 32-250/2-S A-F-A-BQQE



: 98112539

12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

EN

IE5

IEC 60034-30-2.

: -25 .. 120 °C
: 20 °C
998.2 / 3

: 2900 /

: 15.1 3/
: 19.1
: BQQE
- : ISO9906:2012 3B

c : EN-JL1040
: A48-40 B
: EN/DIN: EN-JL1030
: AISI/ASTM: A48-30 B


: -20 .. 50 °C

: 16
: DIN
: DN 32
: PN 16
: 340

: 90SC




- : IE5
- P2: 1.5
: 50 Hz
: 3 x 380-500
: 2.90-2.40 A
Cos - : 0.92-0.85
: 360-4000 /
: 88.9% : 88.9 %
(IEC 34-5): IP55
(IEC 85): F
: 98362354
:
, MEI : 0.70
(): 45
(): 59
:
Danish VVS No.: 381911250
Finnish LVI No.: 4616549

98112539 TPE 32-250/2-S A-F-A-BQQE 50

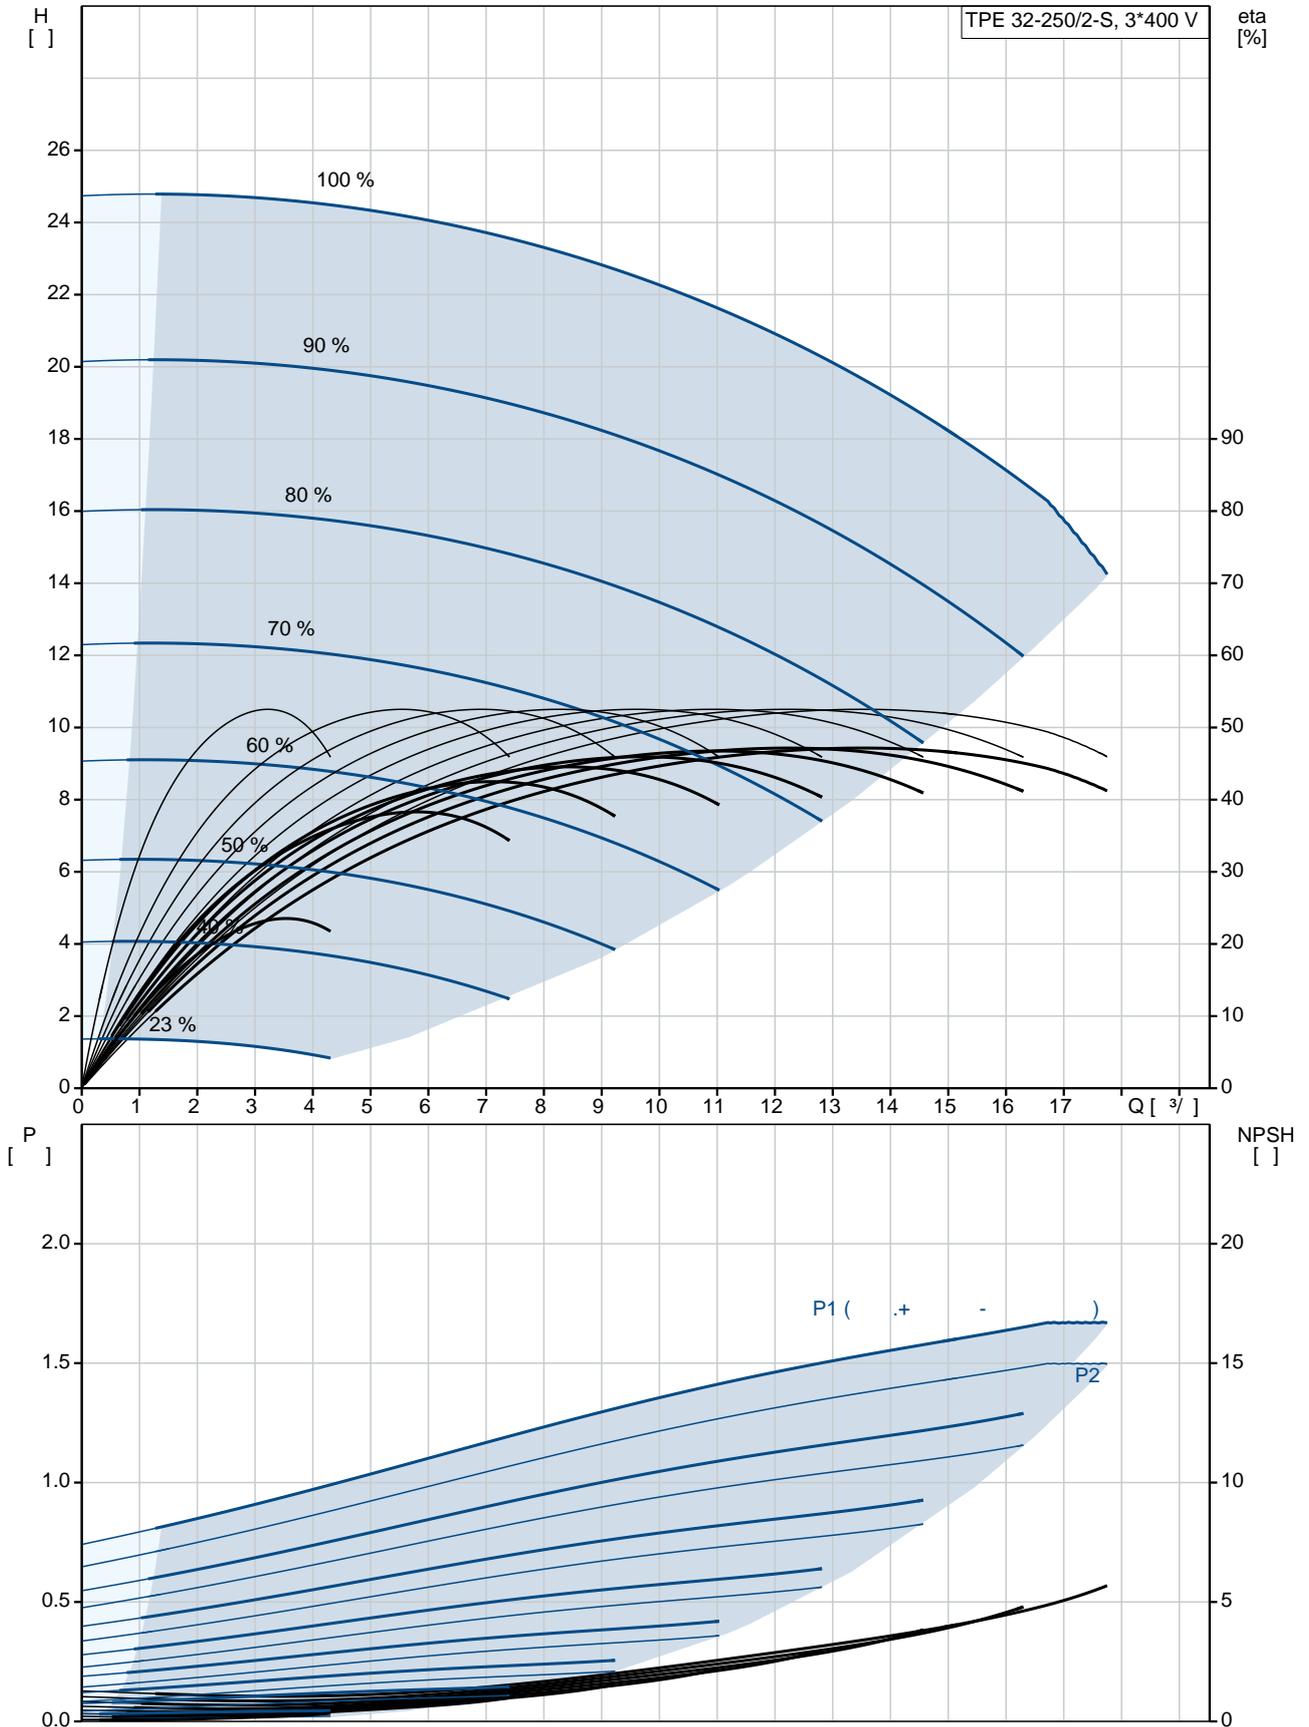

[Redacted]	
, MEI :	0.70
():	45
():	59
:	0.13 ³
Danish VVS No.:	381911250
Finnish LVI No.:	4616549

98112539 TPE 32-250/2-S A-F-A-BQQE 50

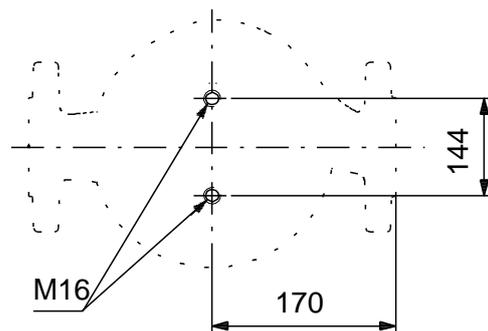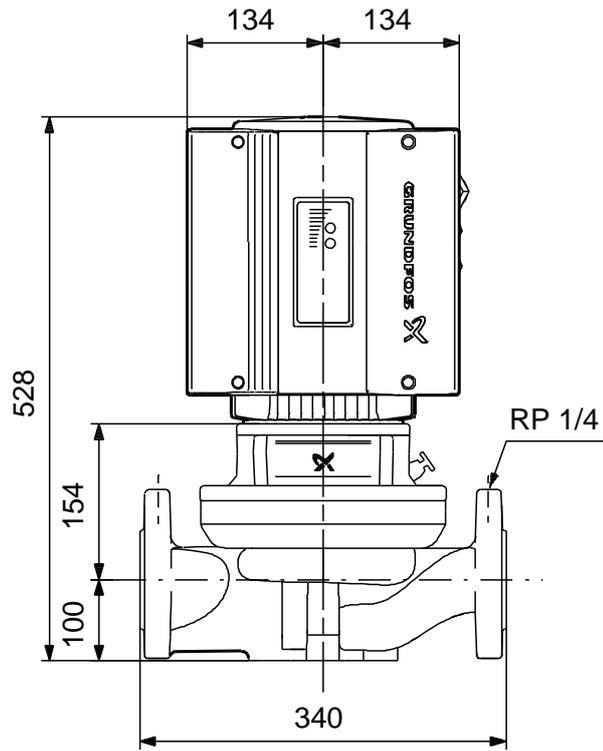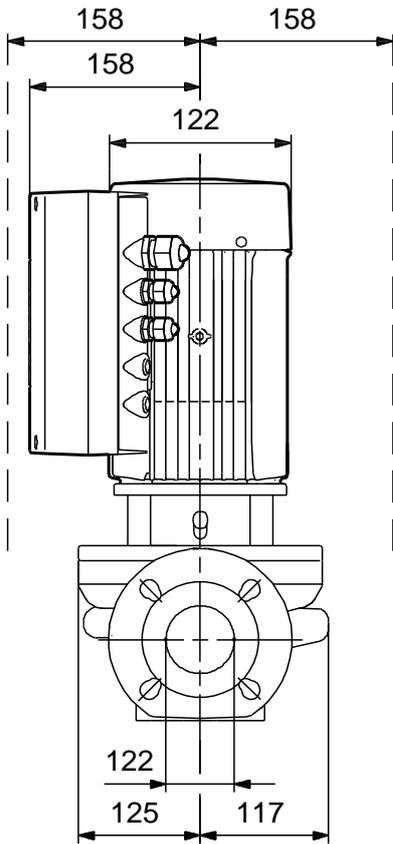

98112539 TPE 32-250/2-S A-F-A-BQQE 50

