

1 TP 25-50/2 A-O-A-BQQE-AX1



: 98281476

12756.

Frequency converter:

: -25 .. 120 °C  
: 20 °C  
998.2 / 3

: 2800 /

: 3.72 3/  
2.7

: 68  
: BQQE  
- : ISO9906:2012 3B2

c : EN-GJL-150  
ASTM class 25


PES+30% GF

: -30 .. 40 °C





EN

: 10  
 : - : 10 / 120 °C  
 : G  
 : DN 25  
 : PN 10  
 : 180  
 : FT75  
  
 :  
 : SIEMENS  
 - P2: 0.12  
 : 50 Hz  
 : 3 x 220-240D/380-415Y  
 : 0.59/0.34 A  
 Cos - : 0.80-0.72  
 : 2800-2850 /  
 : 2  
 (IEC 34-5): IP55  
 (IEC 85): F  
 : 81602312  
  
 :  
 ( ): 8  
 ( ): 9  
 : 0.02 <sup>3</sup>  
 Danish VVS No.: 381810050  
 Finnish LVI No.: 4616001  
 Norwegian NRF no.: 9043509  
 C : HU  
 : 8413705100

## 98281476 TP 25-50/2 A-O-A-BQQE-AX1 50

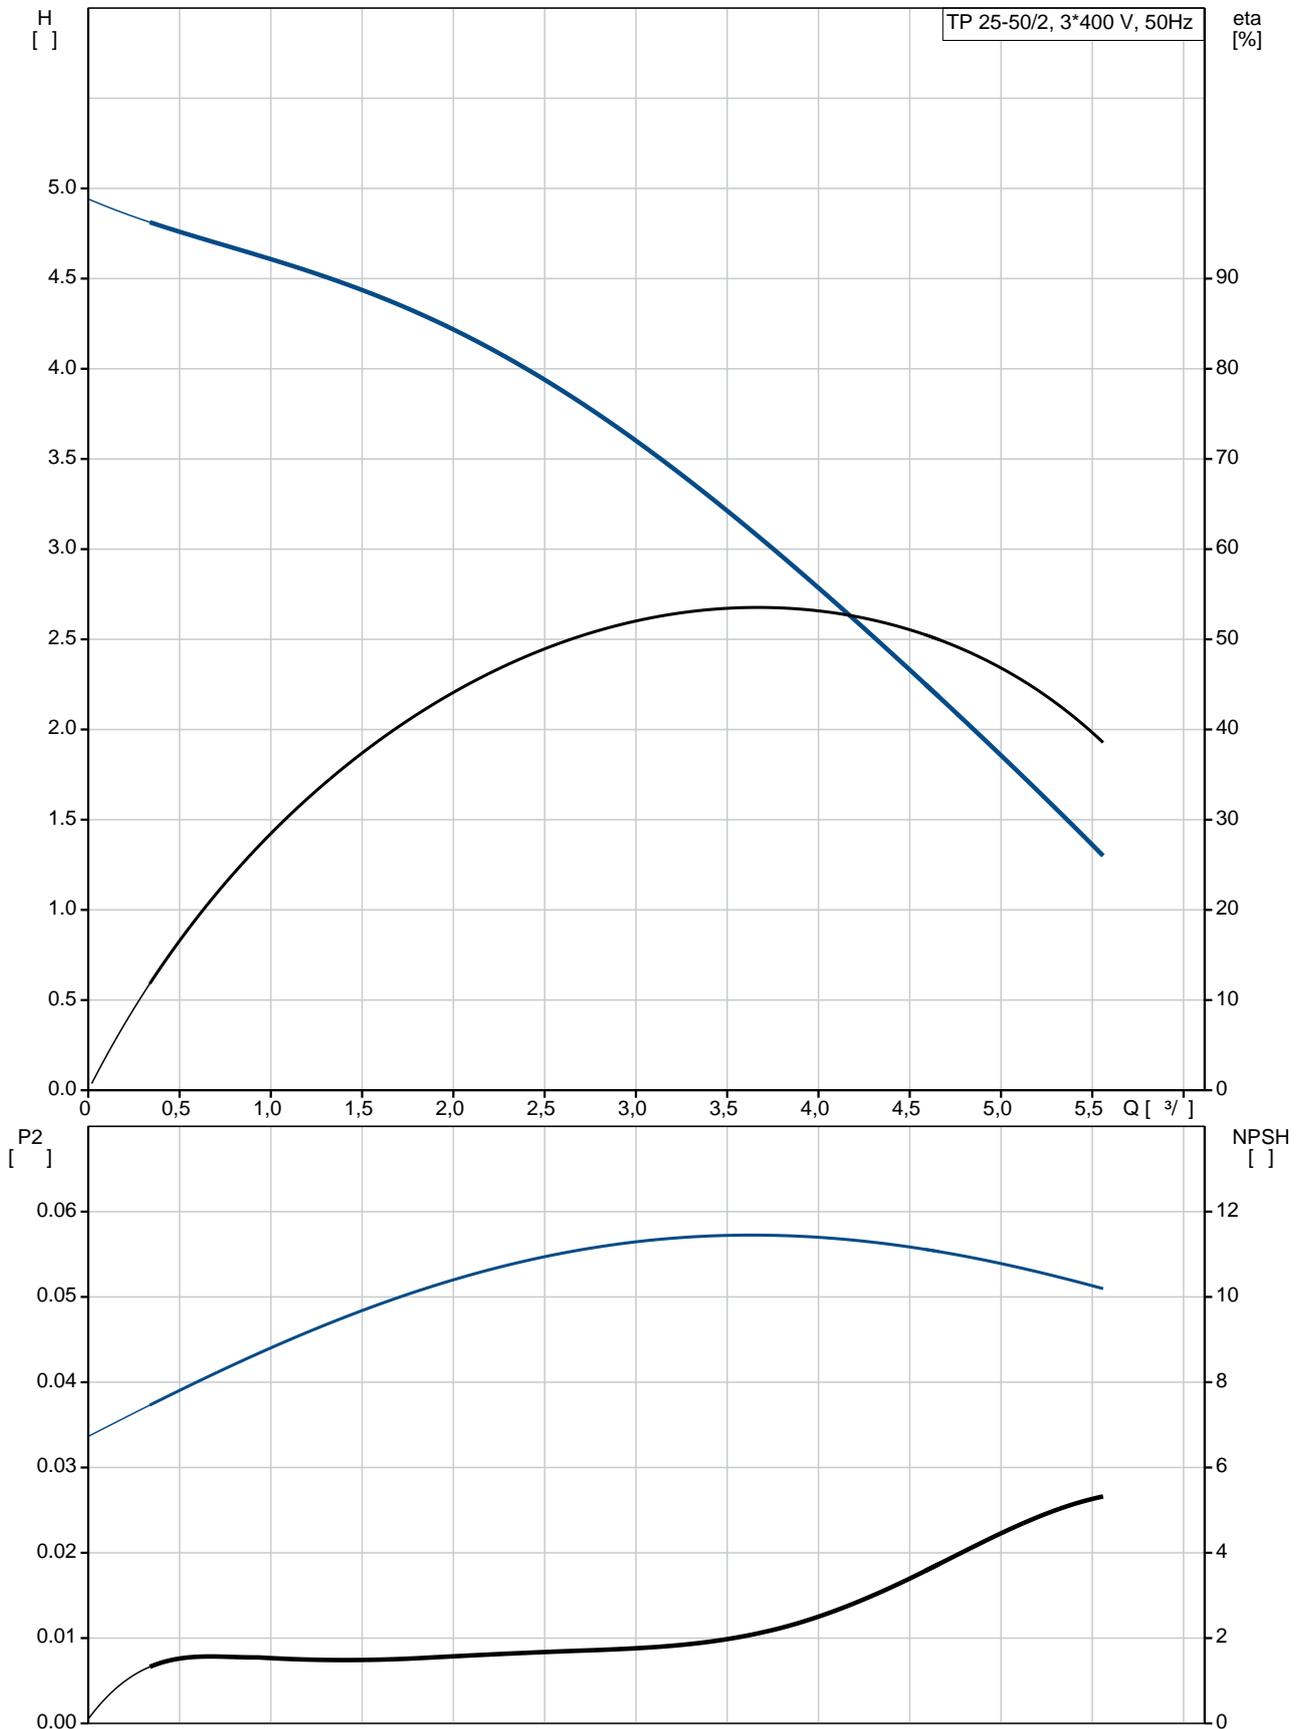


	TP 25-50/2
	A-O-A-BQQE-AX1
	98281476
EAN	5711492389355
	2800 /
	3.72 <sup>3/</sup>
	2.7
	50
	68
	BQQE
	ISO9906:2012 3B2
	A
	EN-GJL-150
	ASTM class 25
	PES+30% GF
	A
	-30 .. 40 °C
	10
	10 / 120 °C
	G
	DN 25
	PN 10
	180
	FT75
	O
	-25 .. 120 °C
	20 °C
	998.2 / <sup>3</sup>
	SIEMENS
	0.12
	50 Hz
	3 x 220-240D/380-415Y
	0.59/0.34 A
Cos	0.80-0.72
	2800-2850 /
	2
(IEC 34-5):	IP55
(IEC 85):	F
	81602312
	8
	9

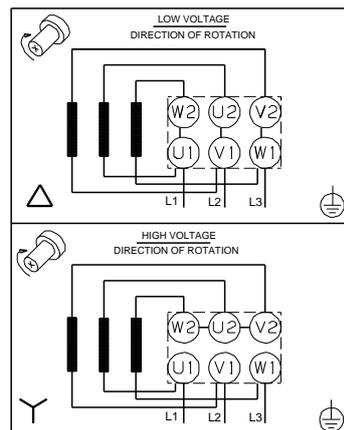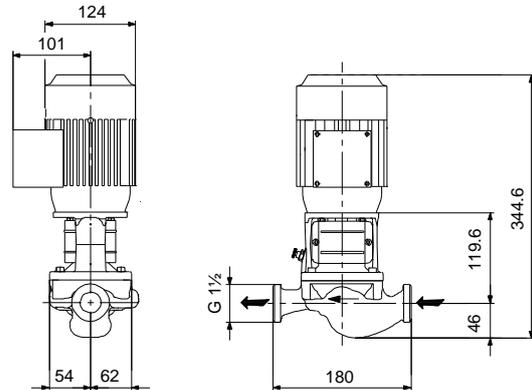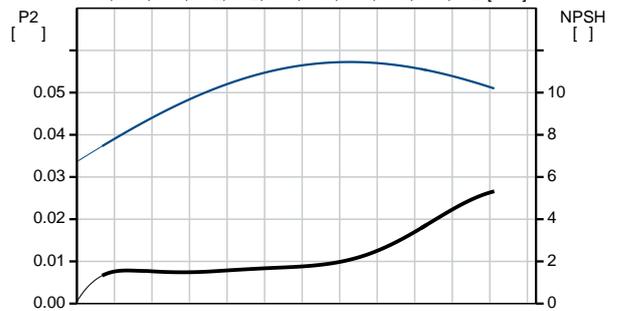
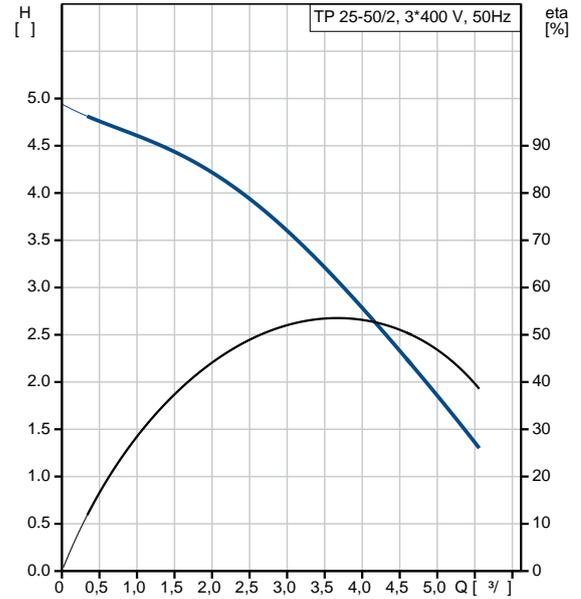


	0.02 <sup>3</sup>
Danish VVS No.:	381810050
Finnish LVI No.:	4616001
Norwegian NRF no.:	9043509
C	HU
	8413705100

**98281476 TP 25-50/2 A-O-A-BQQE-AX1 50**

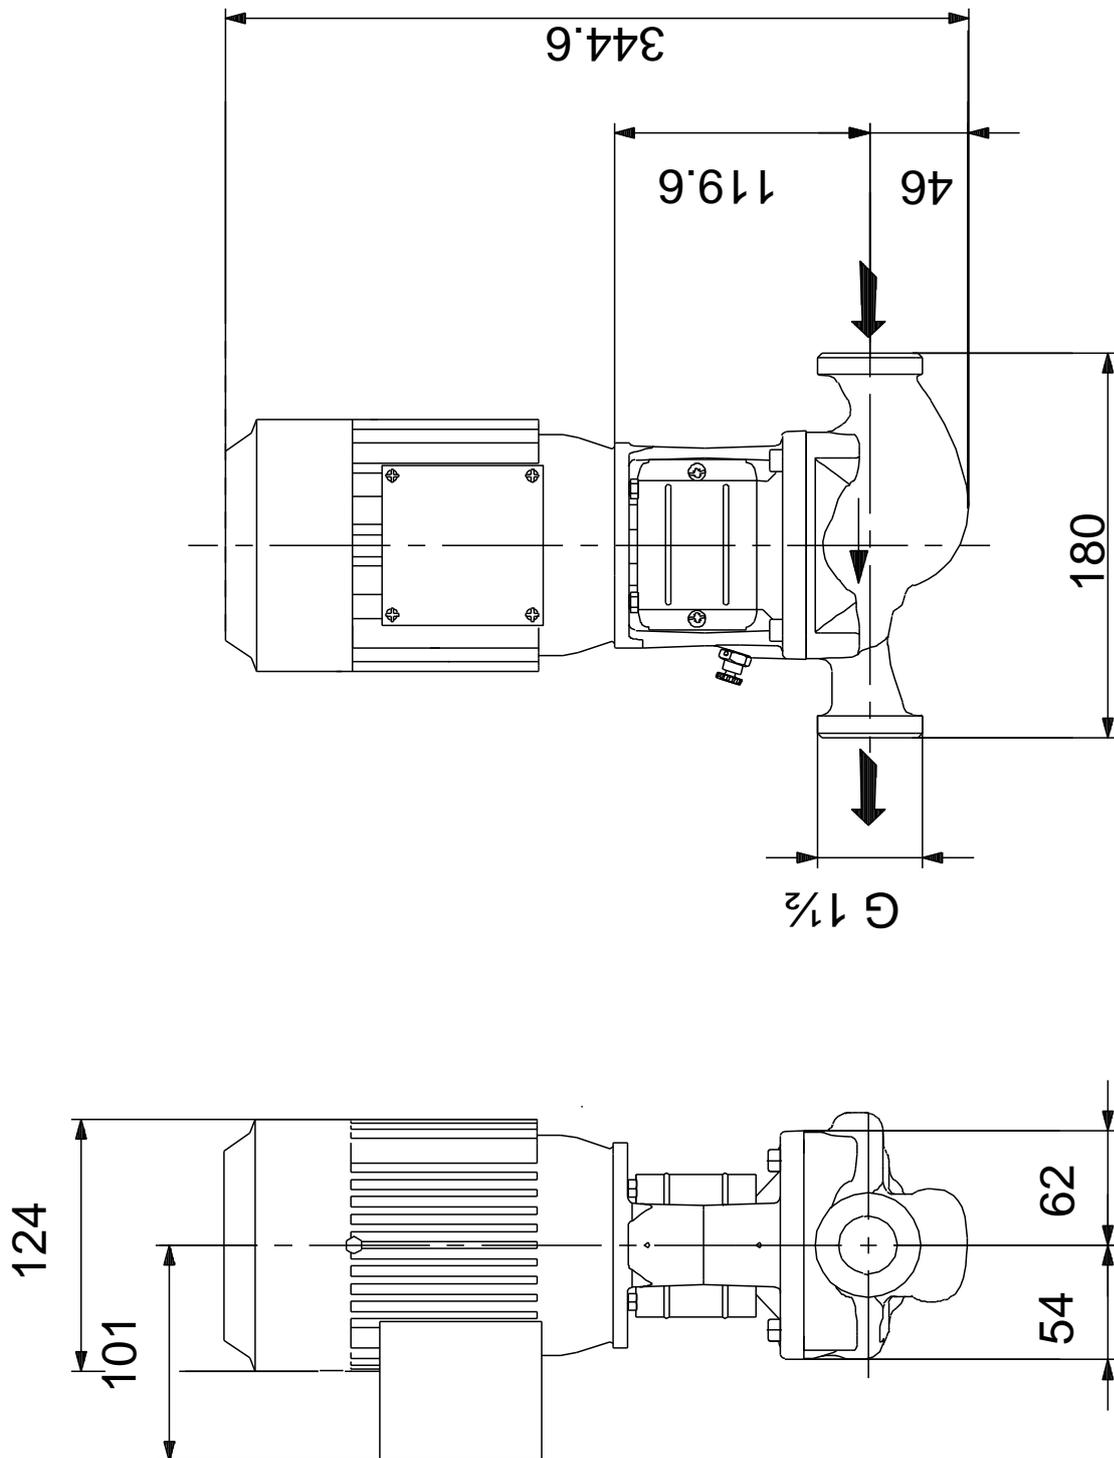

**98281476 TP 25-50/2 A-O-A-BQQE-AX1 50**

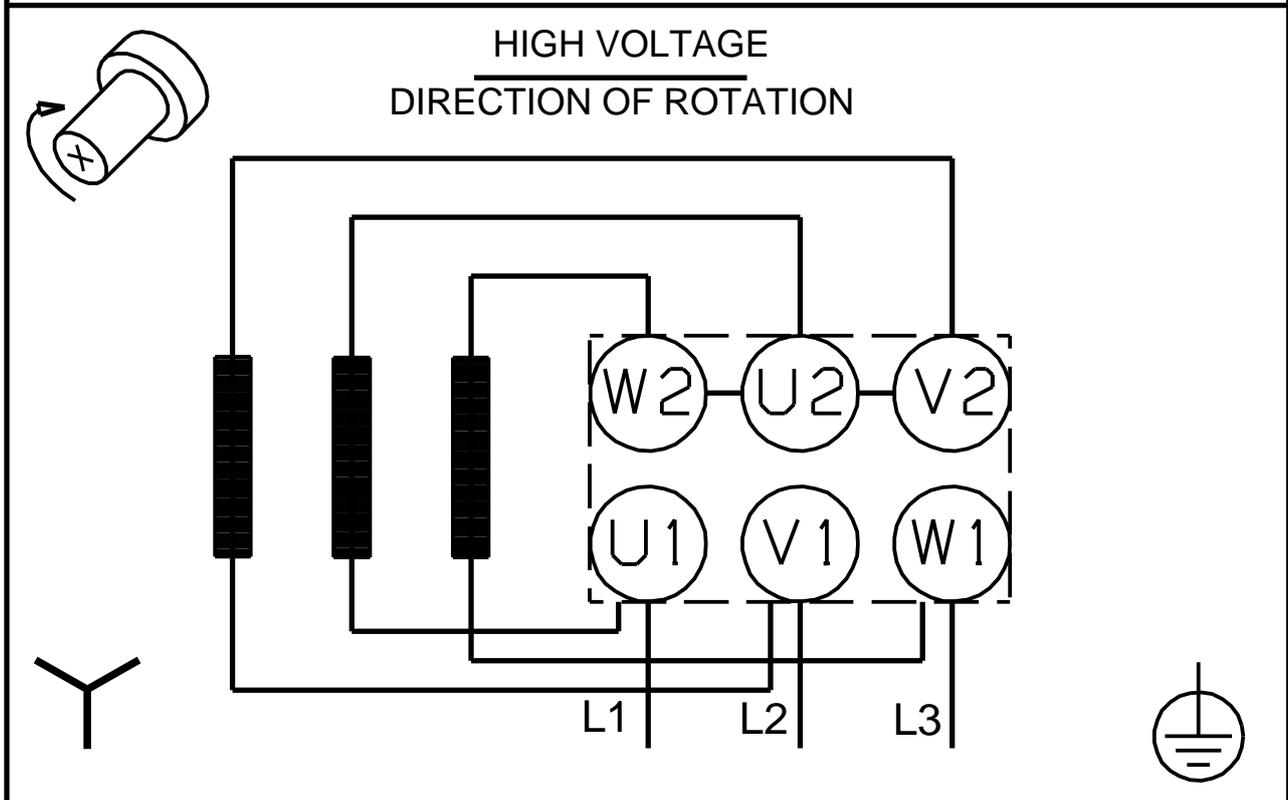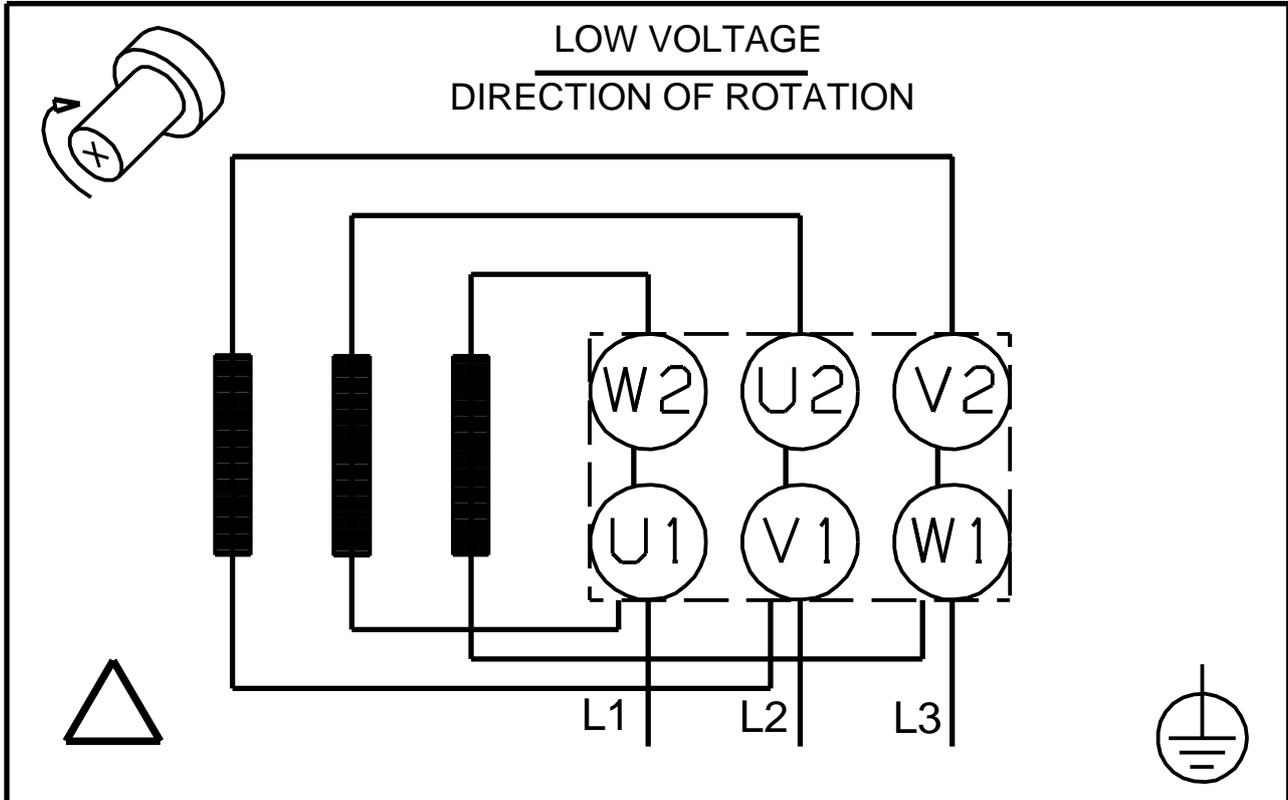

! [ ], .