

1 CRNE 1-6 A-CA-A-E-HQQE



: 98389423

! .

(" - "),

FlexiClamps.

1-

60034-30-2. IE5 IEC

: « .» « .» « ».

Grundfos Eye

- « »: ()
- « »: - ()
- « »: ()

Grundfos Go Remote ().

« », « », « »

».

- ;

- , 0(4)-20 , 0-5 , 0-10 , 0,5 - 3,5 ;

- 5 ;

- , 0-10 , 0(4)-20 ;

- ;

- Pt100/Pt1000;

- LiqTec, ;

- Grundfos;

- 24 ;

- ();

- GENibus;

- CIM- Grundfos.


: ;

: -20 .. 120 °C





: 20 °C

: 998.2 / ³
 :
 : 3380 /
 : 2.2 ³/
 : 40
 :
 : HQQE
 : CE, EAC, ACS
 - : ISO9906:2012 3B
 :
 :
 : EN 1.4408
 : AISI 316
 :
 , EN/DIN: EN 1.4401
 , AISI/ASTM: AISI 316
 : SIC
 :
 Maximum ambient temperature: 50 °C
 : 25
 : - : 25 / 120 °C
 : 25 / -20 °C
 : FlexiClamp
 : DN 32
 : DN 32
 : PN 25
 : FT85
 :
 : IEC
 : 71A
 - : IE5
 - P2: 0.55
 (2), : 0.55
 : 50 / 60 Hz
 : 1 x 200-240
 : 3.45-2.90 A
 Cos - : 0.98
 : 360-4000 /
 : 85.3%
 : 85.3 %
 (IEC 34-5): IP55
 (IEC 85): F
 : 98248246
 :
 Frequency converter:
 :
 :
 , MEI : 0.70
 (): 20.6
 (): 23.5
 : 0.143 ³

98389423 CRNE 1-6 A-CA-A-E-HQQE

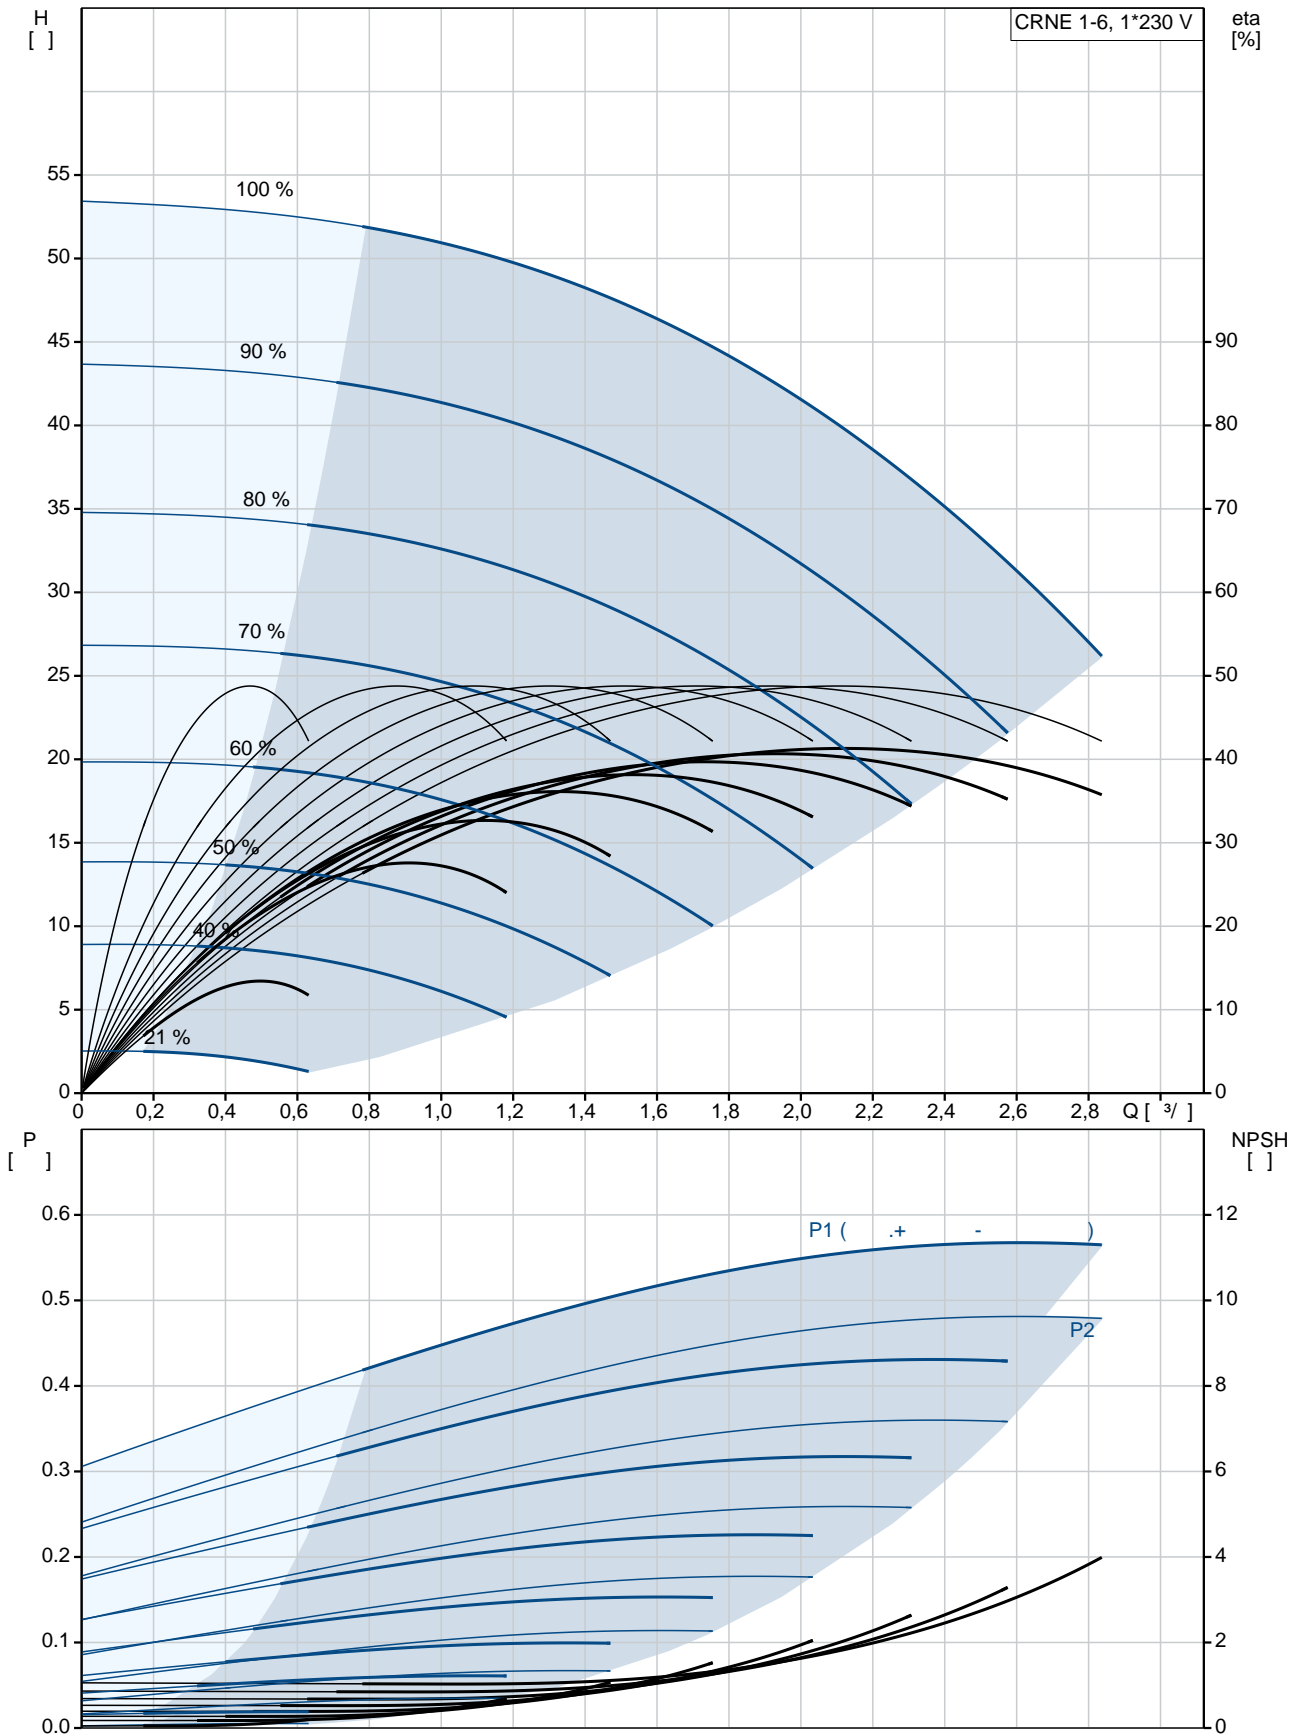


		CRNE 1-6 A-CA-A-E-HQQE
		98389423
EAN	:	5711494177660
		3380 /
		2.2 ^{3/}
		40
		53.5
		6
		6
		0
Low NPSH:	:	N
		HQQE
		CE, EAC, ACS
		ISO9906:2012 3B
		A
		A
		EN 1.4408
		AISI 316
		EN 1.4401
		AISI 316
		A
		E
		SIC
Maximum ambient temperature:	:	50 °C
		25
		25 / 120 °C
		25 / -20 °C
		FlexiClamp
		DN 32
		DN 32
		PN 25
		FT85
		CA
		-20 .. 120 °C
		20 °C
		998.2 / ³
		IEC
		71A
		IE5
- P2:	:	0.55

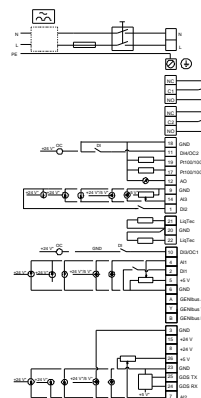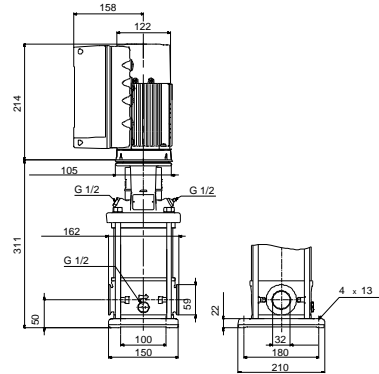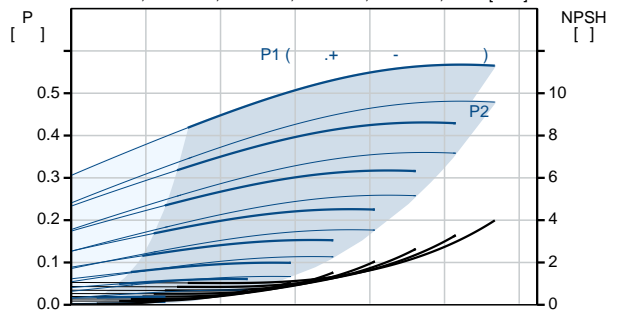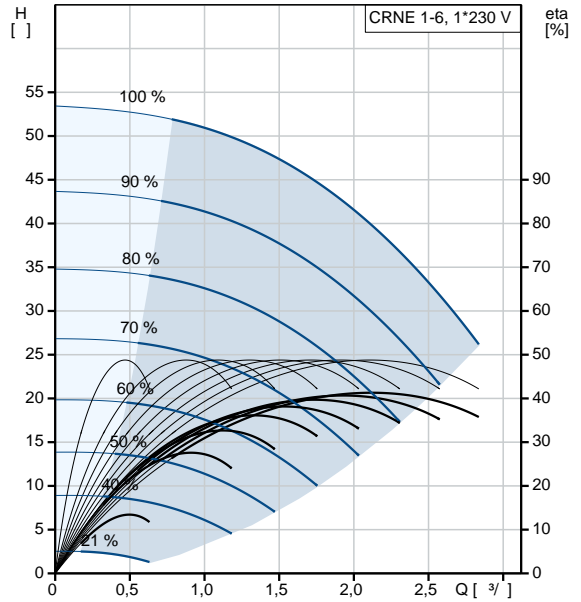

(2),	0.55
:	
:	50 / 60 Hz
:	1 x 200-240
:	3.45-2.90 A
Cos -	0.98
:	
:	360-4000 /
:	85.3%
:	85.3 %
(IEC 34-5):	IP55
(IEC 85):	F
:	ELEC
:	98248246
:	
:	
:	FM300 - Advanced ()
:	
:	
:	
, MEI :	0.70
():	20.6
():	23.5
:	0.143 ³
Config. file no:	98498325

98389423 CRNE 1-6 A-CA-A-E-HQQE

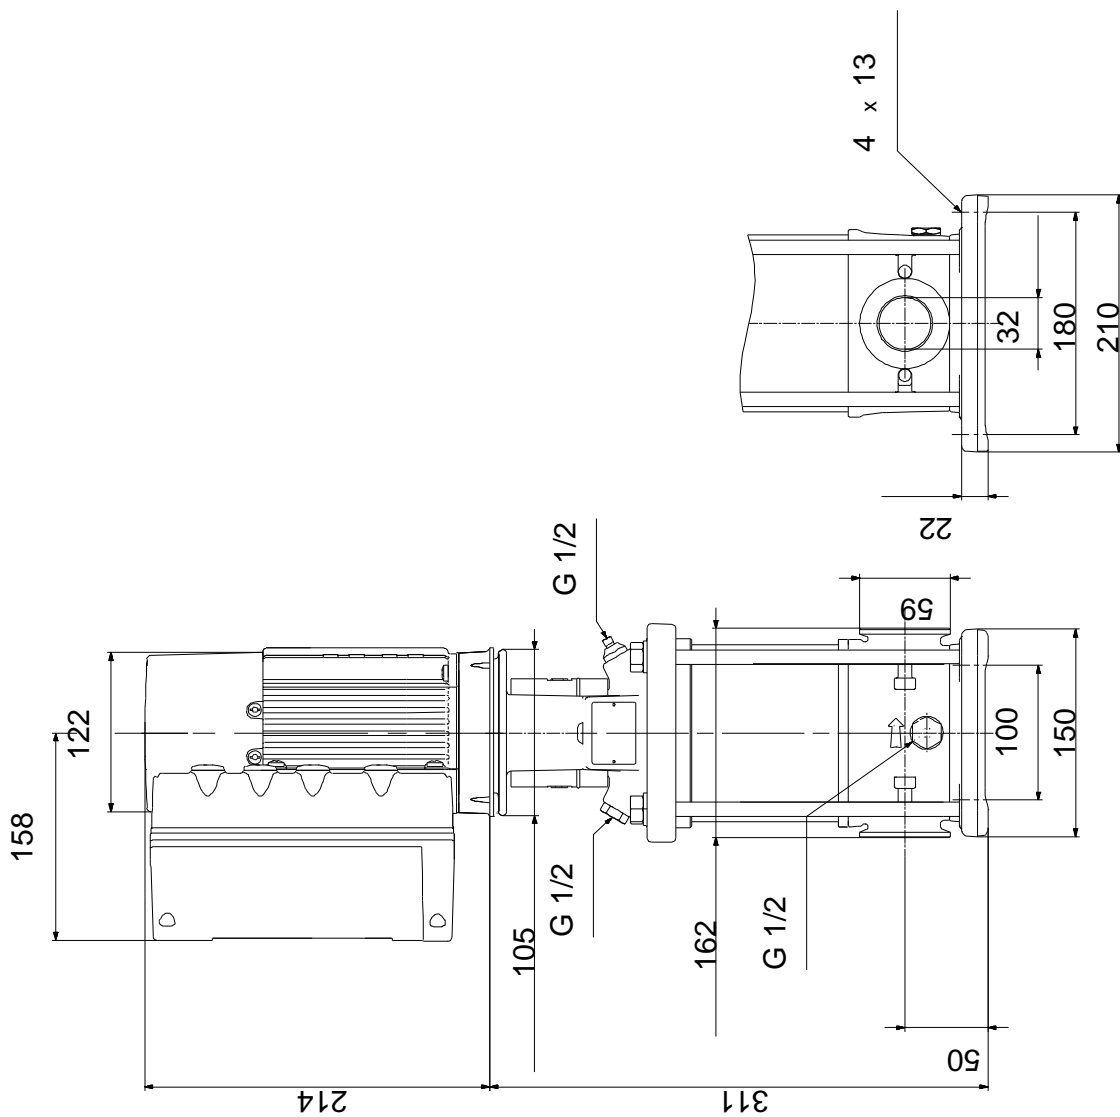

98389423 CRNE 1-6 A-CA-A-E-HQQE

