

1 CRNE 3-8 A-CA-A-E-HQQE



: 98389823

! .

(" - "),

FlexiClamps.

1-

IE5 IEC

60034-30-2.

: « .» « .» « ».

Grundfos Eye

- « »: ()
- « »: - ()
- « »: ()

Grundfos Go Remote ().

« », « », « »

».

- ;

- , 0(4)-20 , 0-5 , 0-10 , 0,5 - 3,5 ;

- 5 ;

- , 0-10 , 0(4)-20 ;

- ;

- Pt100/Pt1000;

- LiqTec, ;

- Grundfos;

- 24 ;

- ();

- GENibus;

- CIM- Grundfos.


: ;

: -20 .. 120 °C





: 20 °C

: 998.2 / ³
 :
 : 3350 /
 : 3.5 ³/
 : 52.4
 :
 : HQQE
 : CE, EAC, ACS
 - : ISO9906:2012 3B
 :
 :
 : EN 1.4408
 : AISI 316
 :
 , EN/DIN: EN 1.4401
 , AISI/ASTM: AISI 316
 : SIC
 :
 Maximum ambient temperature: 50 °C
 : 25
 : - : 25 / 120 °C
 : 25 / -20 °C
 : FlexiClamp
 : DN 32
 : DN 32
 : PN 25
 : FT100
 :
 : IEC
 : 80B
 - : IE5
 - P2: 1.1
 (2), : 1.1
 : 50 / 60 Hz
 : 1 x 200-240
 : 6.70-5.60 A
 Cos - : 0.99
 : 360-4000 /
 : 86.9%
 : 86.9 %
 (IEC 34-5): IP55
 (IEC 85): F
 : 98248267
 :
 Frequency converter:
 :
 :
 , MEI : 0.70
 (): 23.5
 (): 26.4
 : 0.143 ³

98389823 CRNE 3-8 A-CA-A-E-HQQE

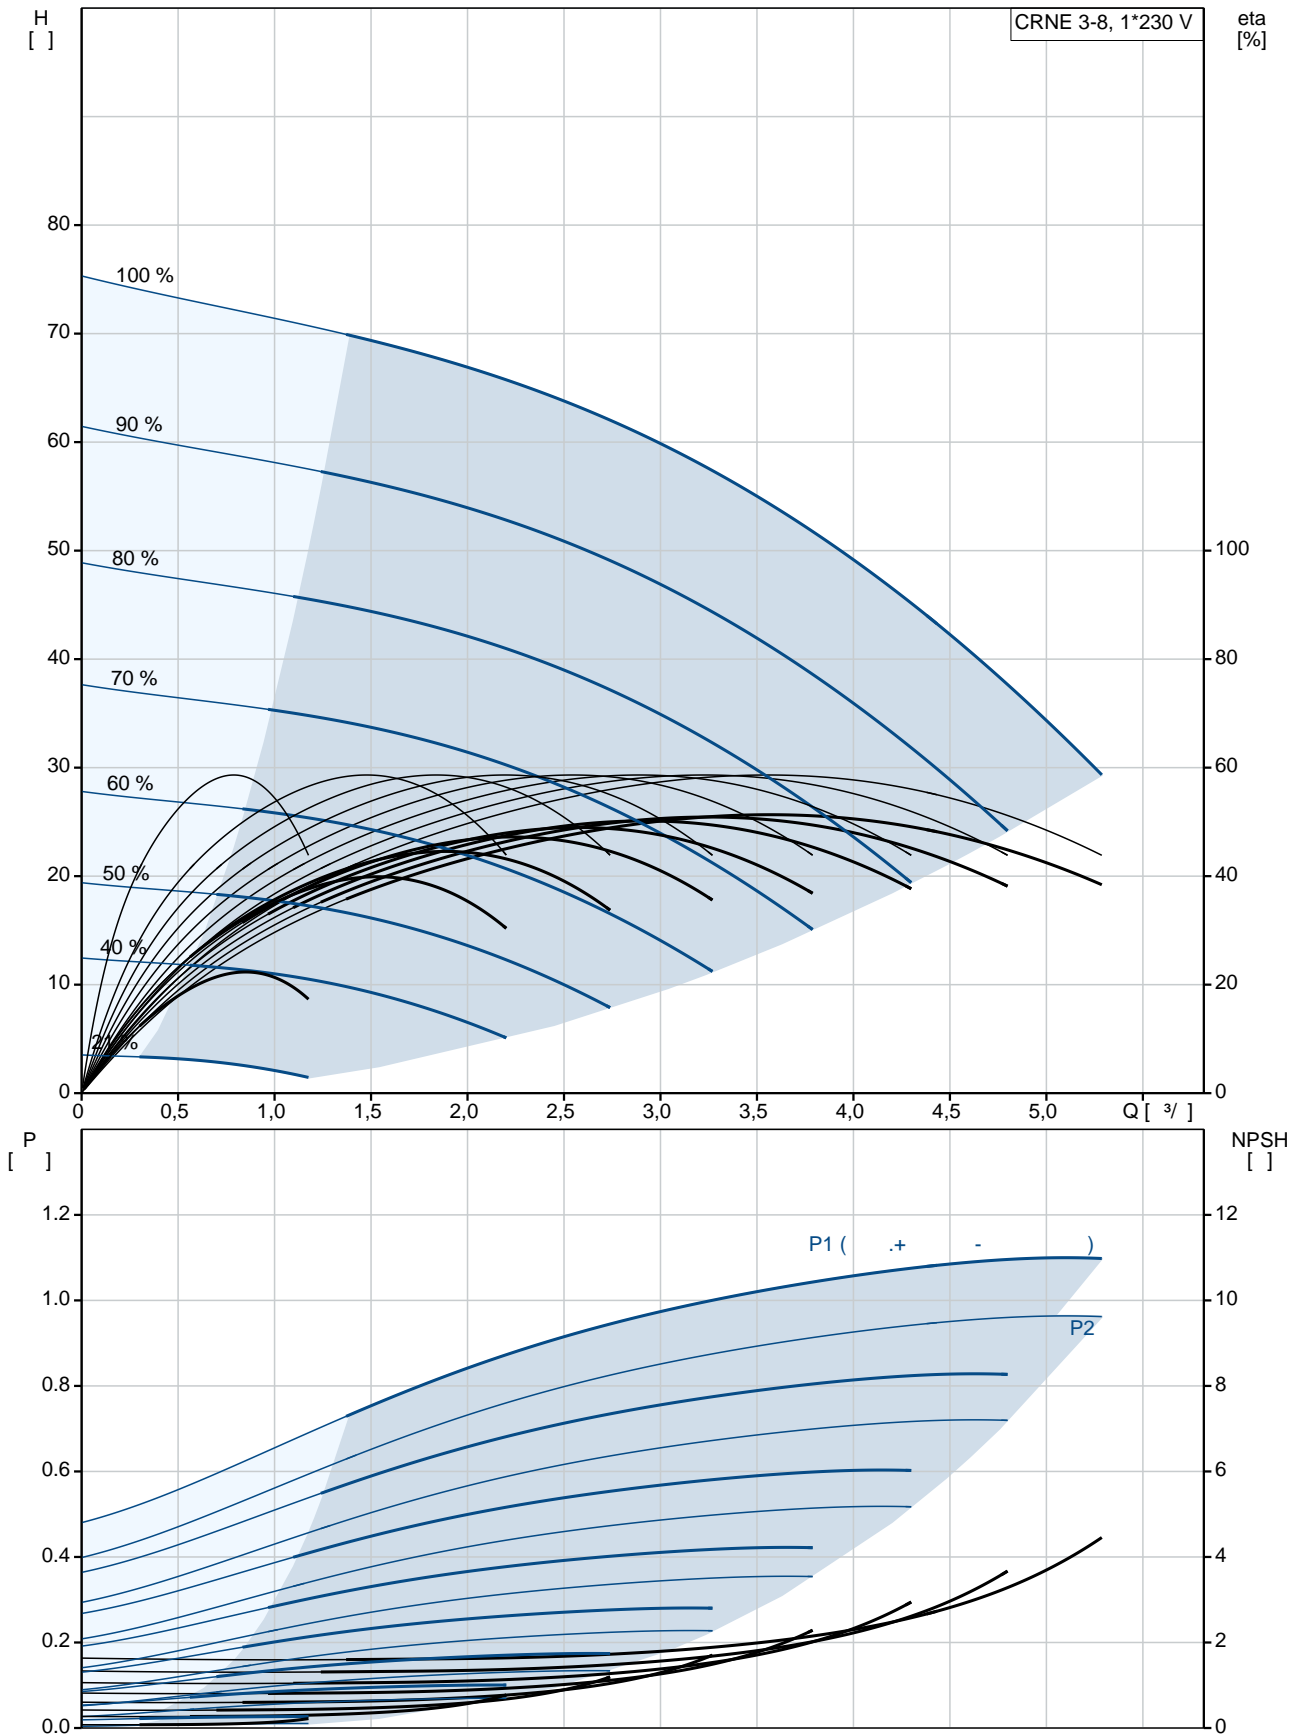


	CRNE 3-8 A-CA-A-E-HQQE
	98389823
EAN	5711494184965
	3350 /
	3.5 ^{3/}
	52.4
	73.9
	8
	8
	0
Low NPSH:	N
	HQQE
	CE, EAC, ACS
	ISO9906:2012 3B
	A
	A
	EN 1.4408
	AISI 316
	EN 1.4401
	AISI 316
	A
	E
	SIC
Maximum ambient temperature:	50 °C
	25
	25 / 120 °C
	25 / -20 °C
	FlexiClamp
	DN 32
	DN 32
	PN 25
	FT100
	CA
	-20 .. 120 °C
	20 °C
	998.2 / ³
	IEC
	80B
	IE5
- P2:	1.1

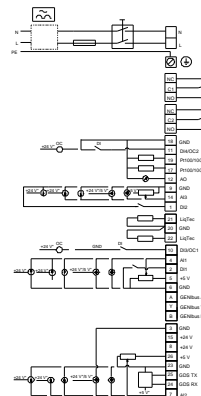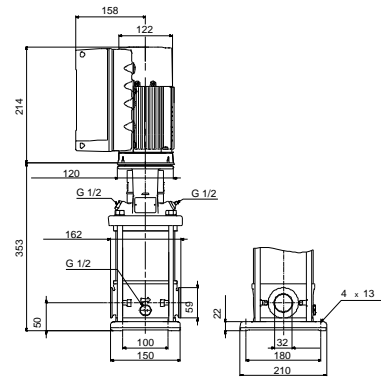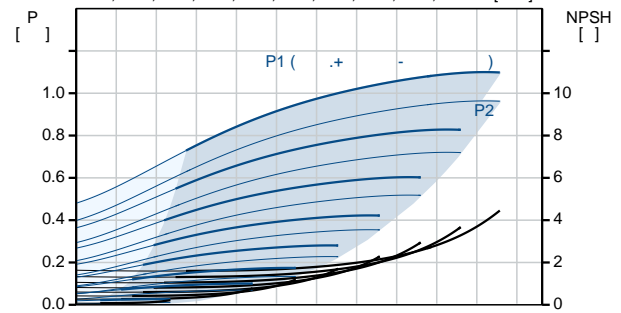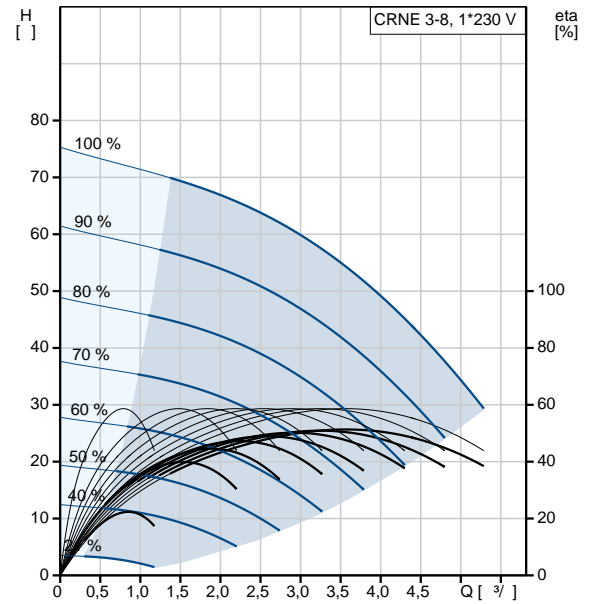

(2),	1.1
:	
:	50 / 60 Hz
:	1 x 200-240
:	6.70-5.60 A
Cos -	0.99
:	
:	360-4000 /
:	86.9%
:	86.9 %
(IEC 34-5):	IP55
(IEC 85):	F
:	ELEC
:	98248267
:	
:	
:	FM300 - Advanced ()
:	
:	
:	
, MEI :	0.70
():	23.5
():	26.4
:	0.143 ³
Config. file no:	98498683

98389823 CRNE 3-8 A-CA-A-E-HQQE

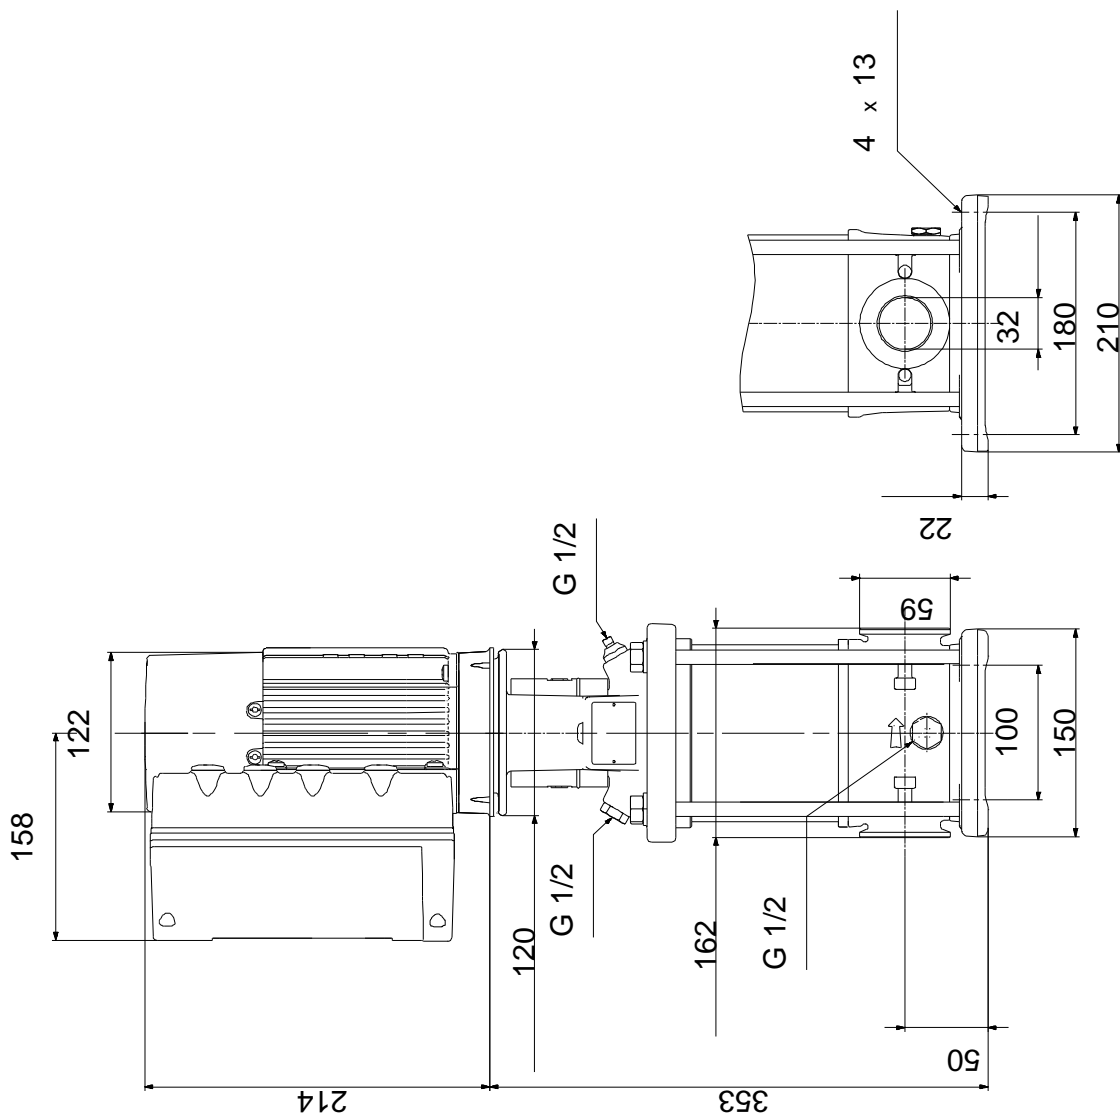

98389823 CRNE 3-8 A-CA-A-E-HQQE



!

[],

.