

1 CRNE 3-17 A-CA-A-E-HQQE



: 98389869

! .

(" - "),

FlexiClamps.

3-

60034-30-2. IE5 IEC

: « .» « .» « ».

Grundfos Eye

- « »: ()
- « »: - ()
- « »: ()

Grundfos Go Remote ().

« », « », « »

».

- ;

- , 0(4)-20 , 0-5 , 0-10 , 0,5 - 3,5 ;

- 5 ;

- , 0-10 , 0(4)-20 ;

- ;

- Pt100/Pt1000;

- LiqTec, ;

- Grundfos;

- 24 ;

- ();

- GENibus;



- CIM- Grundfos.

:
:

: -20 .. 120 °C
: 20 °C

: 998.2 / ³
 :
 : 3501 /
 : 3.5 ³/
 : 122
 :
 : HQQE
 : CE, EAC, ACS
 - : ISO9906:2012 3B
 :
 :
 : EN 1.4408
 : AISI 316
 :
 , EN/DIN: EN 1.4401
 , AISI/ASTM: AISI 316
 : SIC
 :
 Maximum ambient temperature: 50 °C
 : 25
 : - : 25 / 120 °C
 : 25 / -20 °C
 : FlexiClamp
 : DN 32
 : DN 32
 : PN 25
 : FT115
 :
 : IEC
 : 90LD
 - : IE5
 - P2: 2.2
 (2), : 2.2
 : 50 / 60 Hz
 : 3 x 380-500
 : 4.15-3.40 A
 Cos - : 0.93-0.87
 : 360-4000 /
 : 90.1%
 : 90.1 %
 (IEC 34-5): IP55
 (IEC 85): F
 : 98190193
 :
 Frequency converter:
 :
 :
 , MEI : 0.70
 (): 32.7
 (): 38.3
 : 0.173 ³

98389869 CRNE 3-17 A-CA-A-E-HQQE

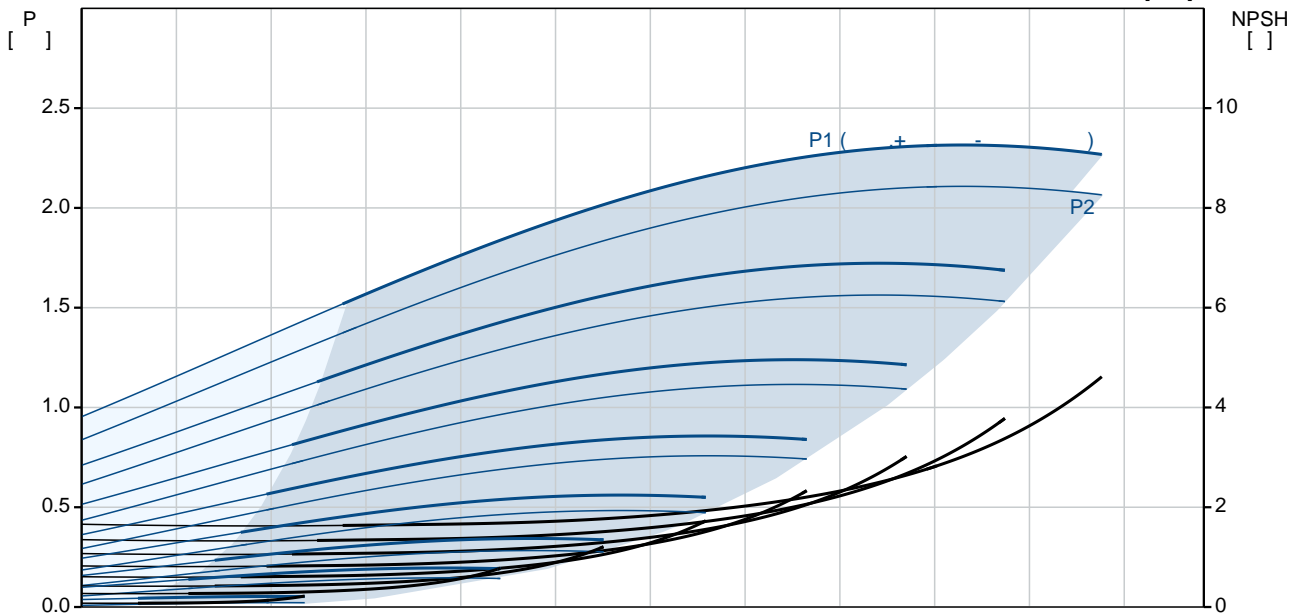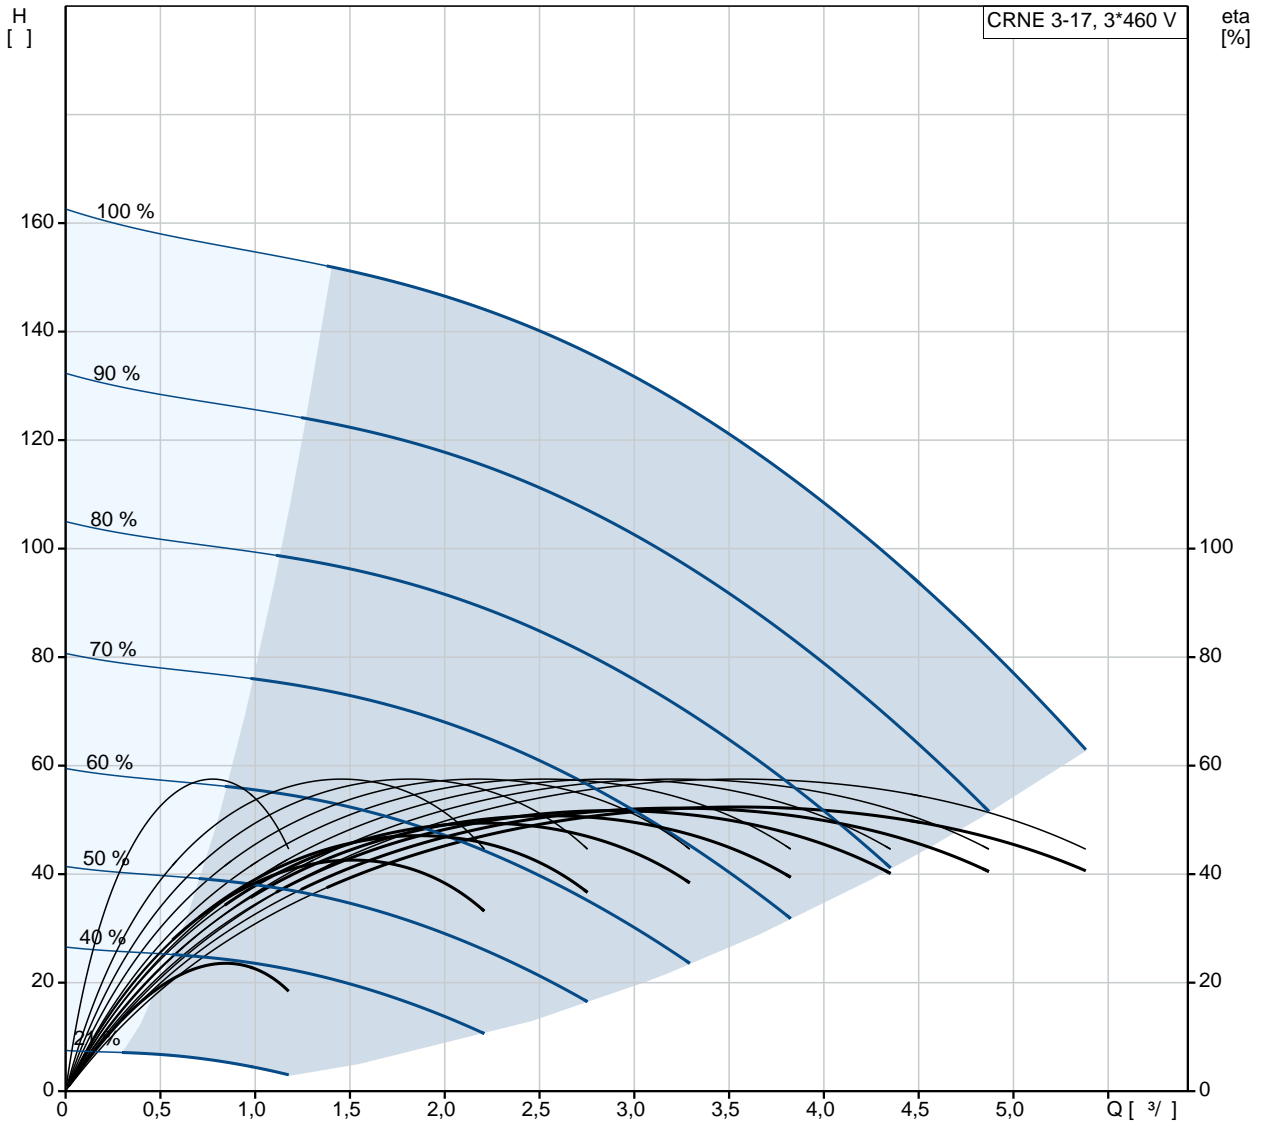

CRNE 3-17
A-CA-A-E-HQQE
98389869
EAN : 5711494185726

3501 /
3.5 ^{3/}
122
162.7
17
17

Low NPSH: N

HQQE
CE, EAC, ACS
ISO9906:2012 3B
A
A

EN 1.4408
AISI 316

EN/DIN: EN 1.4401
AISI/ASTM: AISI 316

A
E
SIC

Maximum ambient temperature: 50 °C
25
25 / 120 °C
25 / -20 °C





FlexiClamp
DN 32
DN 32
PN 25

FT115
CA

-20 .. 120 °C


20 °C
998.2 / ³

IEC
90LD
IE5
- P2: 2.2

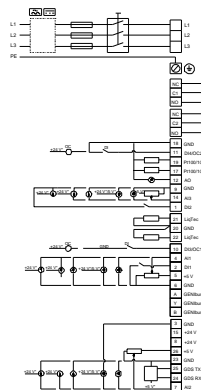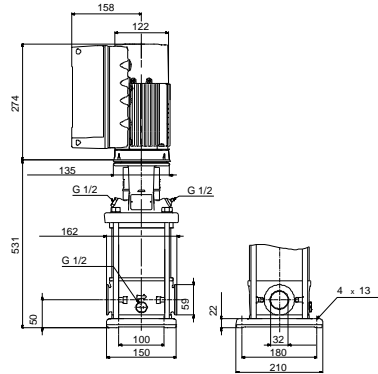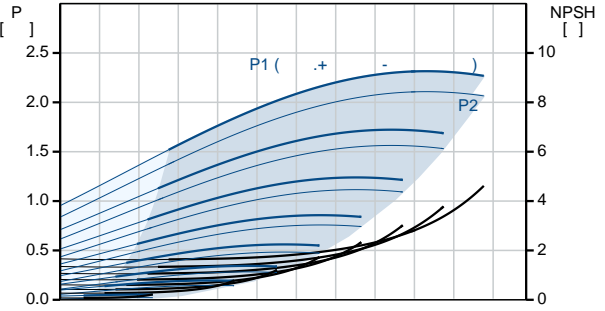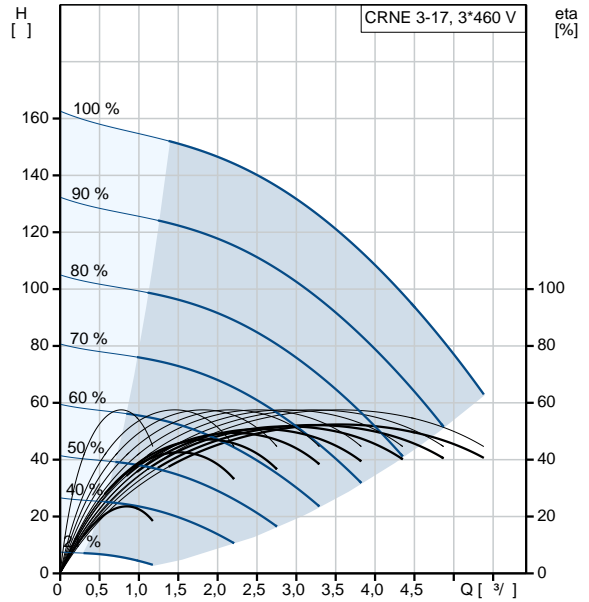

(2),	2.2
:	
:	50 / 60 Hz
:	3 x 380-500
:	4.15-3.40 A
Cos - :	0.93-0.87
:	360-4000 /
:	90.1%
:	90.1 %
(IEC 34-5):	IP55
(IEC 85):	F
:	ELEC
:	98190193
:	
:	
:	FM300 - Advanced ()
:	
:	
:	
, MEI :	0.70
():	32.7
():	38.3
:	0.173 ³
Config. file no:	98498730

98389869 CRNE 3-17 A-CA-A-E-HQQE

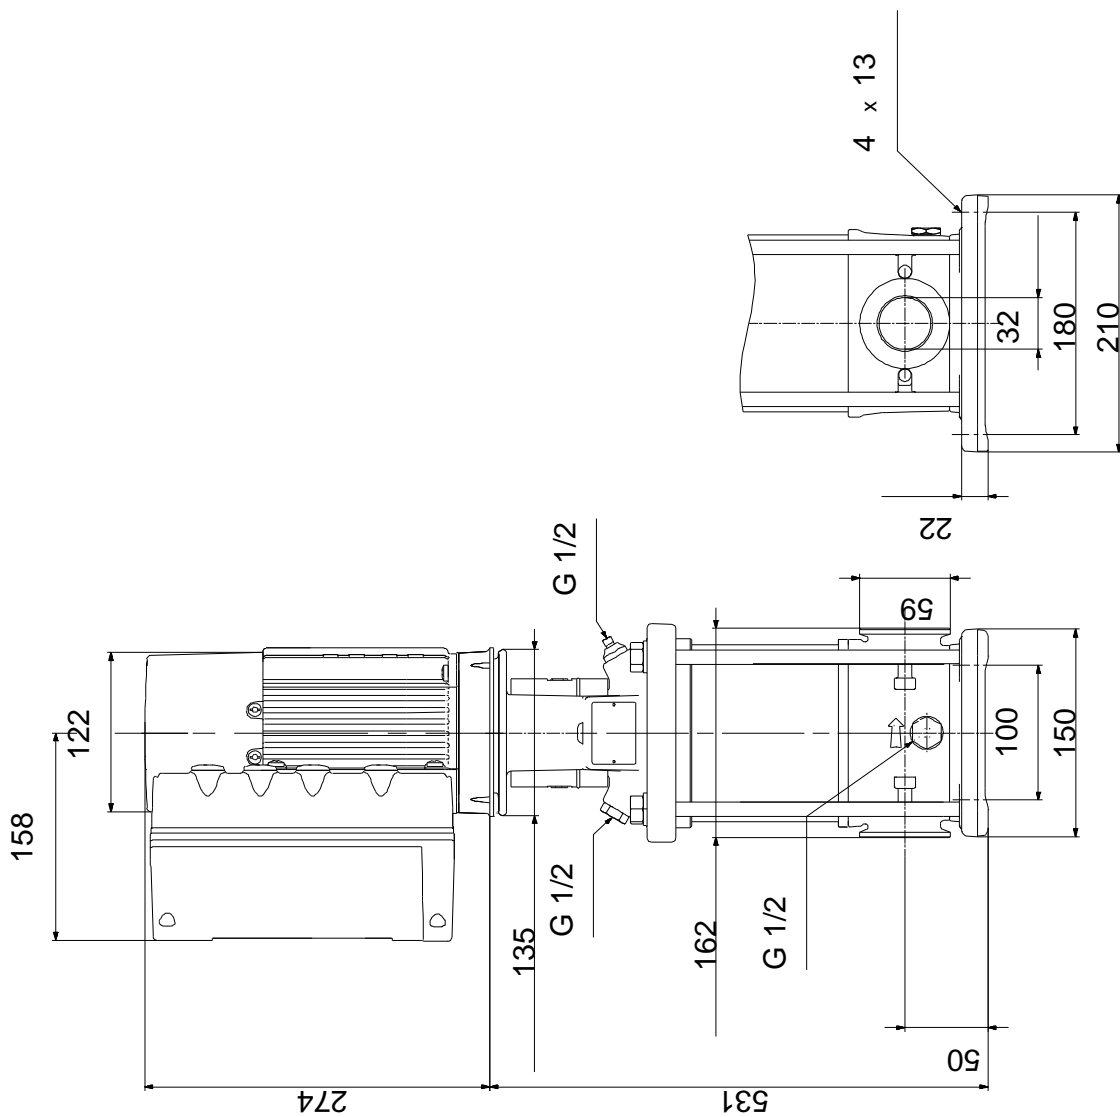

98389869 CRNE 3-17 A-CA-A-E-HQQE



!

[], .