

1 TP 40-90/4 A-F-A-BQQE-CX3



: 98462889

12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

EN

Frequency converter:

: -25 .. 120 °C
: 20 °C

: 998.2 / ³

: 1370 /

: 6 ³/

: 5.1

: 145

: BQQE

- : ISO9906:2012 3B2

c : EN-GJL-250
ASTM class 35

, EN/DIN: EN 1.4301

, AISI/ASTM: AISI 304

: -30 .. 40 °C

: 16


- : 16 / 120 °C

: DIN





: DN 40

: PN 16
 : 320
 : FT85
 :
 : 71A
 - P2: 0.25
 : 50 Hz
 : 3 x 220-240D/380-415Y
 : 1.48/0.85 A
 : 400-440 %
 Cos - : 0.75-0.65
 : 1400-1420 /
 : 61,5% - 68,5%
 : 61.5-68.5 %
 3/4 : 70 %
 1/2 : 63.9 %
 : 4
 (IEC 34-5): 55 Dust/Jetting
 (IEC 85): F
 : 86805101
 :
 , MEI : 0.70
 (): 25
 (): 28.6
 : 0.08 ³
 Danish VVS No.: 38 1822.090
 Finnish LVI No.: 4616029
 C : RU
 : 8413705100

98462889 TP 40-90/4 A-F-A-BQQE-CX3 50

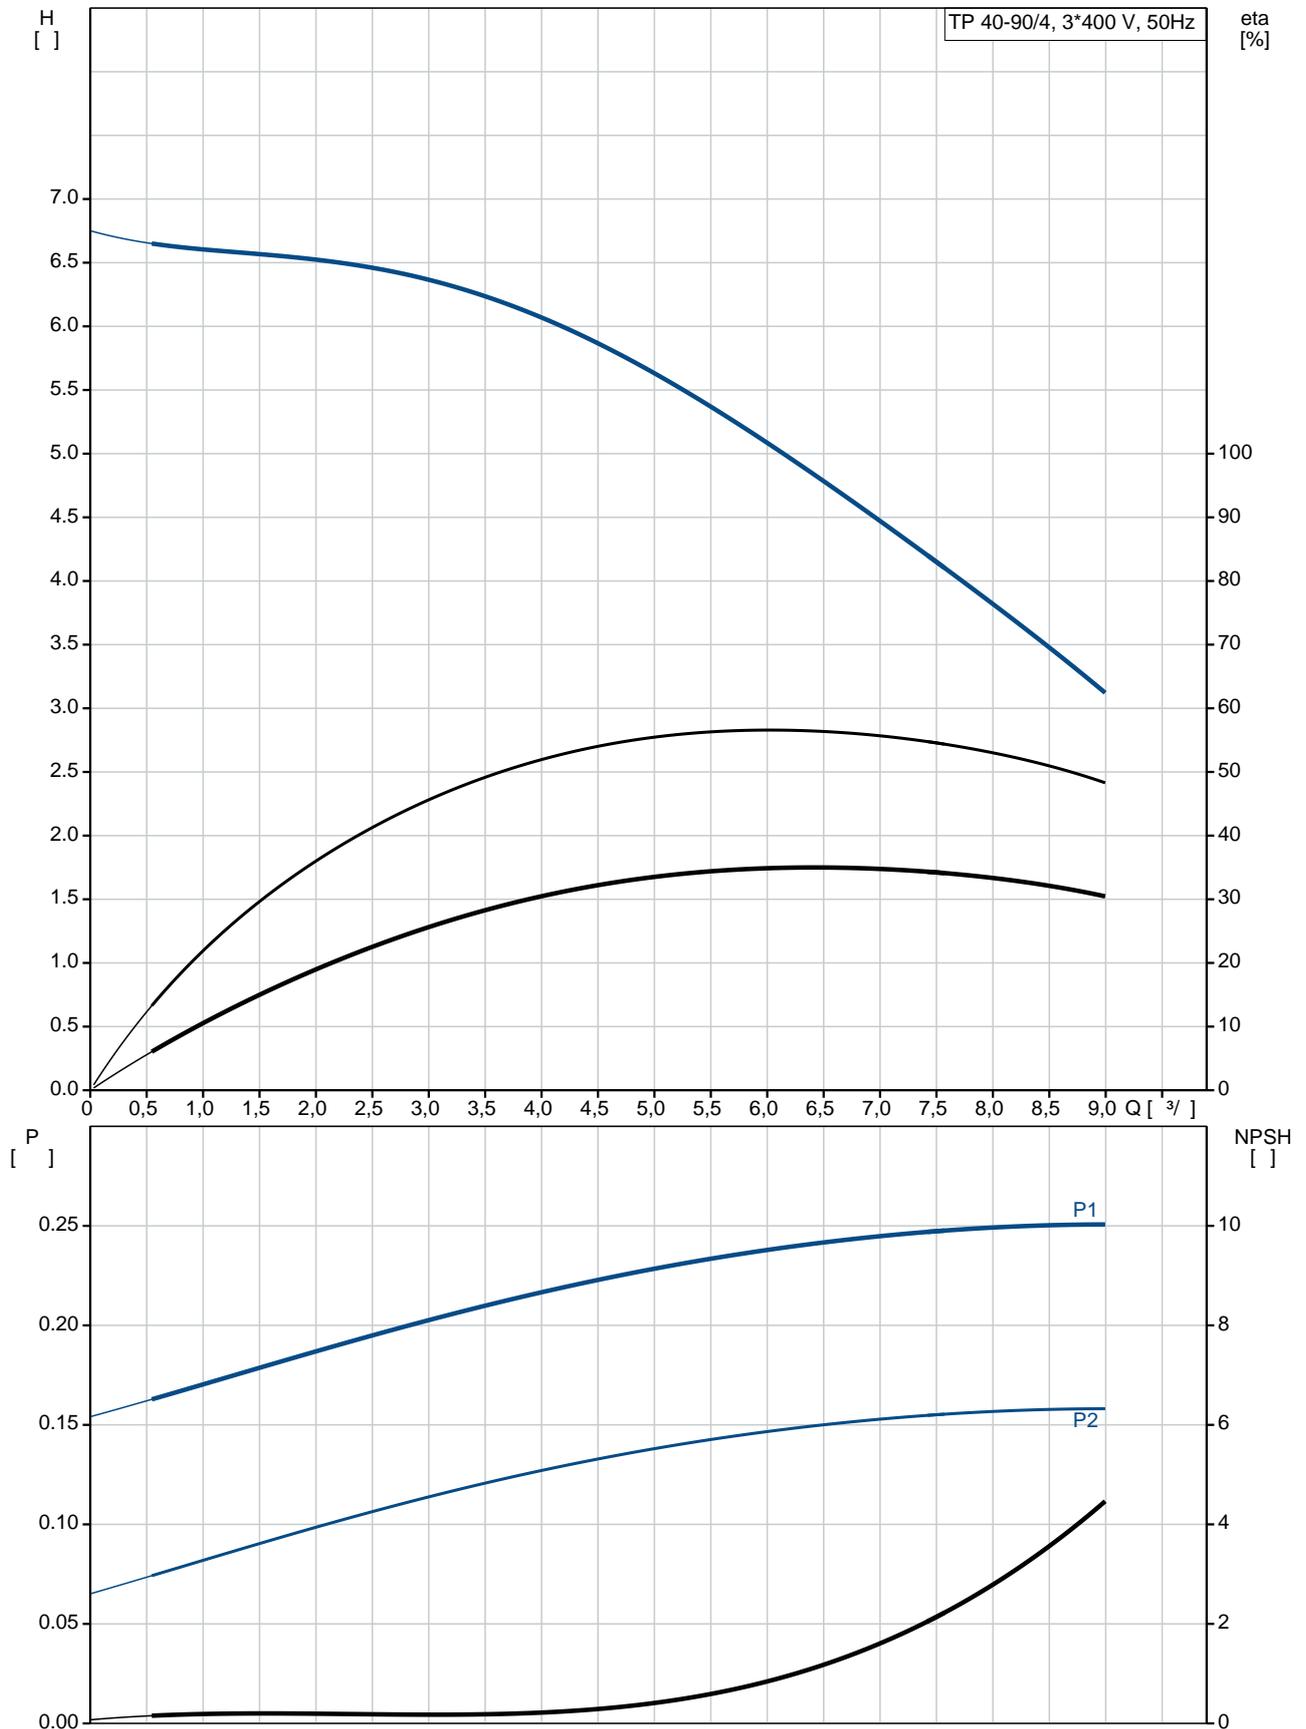


Model	TP 40-90/4
Configuration	A-F-A-BQQE-CX3
EAN	5711495499716
Part Number	98462889
Flow Rate	1370 /
Head	6 m
Power	5.1 kW
Speed	90 rpm
Efficiency	145 %
Material	BQQE
Standard	ISO9906:2012 3B2
Class	A
Material	EN-GJL-250
Material	ASTM class 35
Material	EN/DIN: EN 1.4301
Material	AISI/ASTM: AISI 304
Material	A
Temperature	-30 .. 40 °C
Pressure	16 bar
Pressure	16 bar / 120 °C
Standard	DIN
Standard	DN 40
Standard	PN 16
Standard	320
Standard	FT85
Standard	F
Temperature	-25 .. 120 °C
Temperature	20 °C
Power	998.2 / 3
Power	71A
Power	- P2: 0.25
Power	50 Hz
Power	3 x 220-240D/380-415Y
Power	1.48/0.85 A
Power	400-440 %
Cos	0.75-0.65
Cos	1400-1420 /
Cos	61,5% - 68,5%
Cos	61.5-68.5 %
Cos	3/4 70 %
Cos	1/2 63.9 %
Cos	4
(IEC 34-5):	55 Dust/Jetting

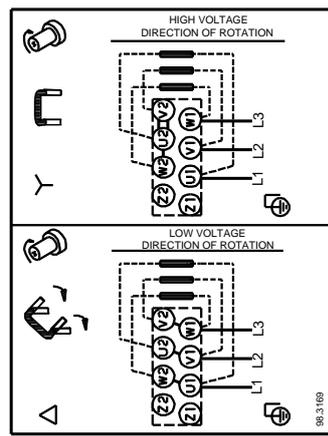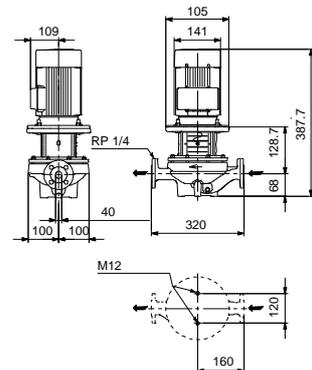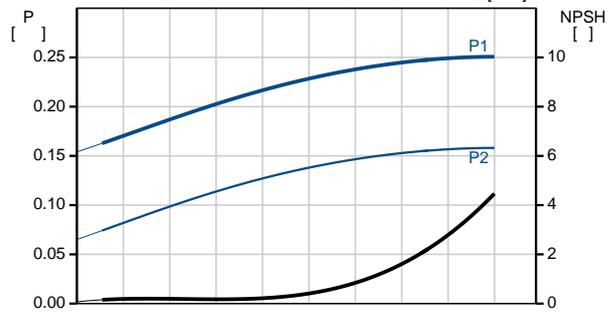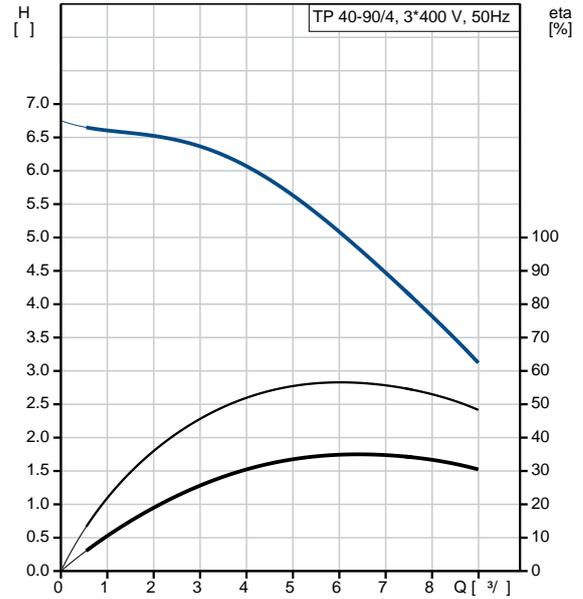


(IEC 85):	F
:	.
:	86805101
:	.
:	.
:	.
:	.
, MEI :	0.70
(): :	25
(): :	28.6
:	0.08 ³
:	CN
Danish VVS No.:	38 1822.090
Finnish LVI No.:	4616029
C :	RU
:	8413705100

98462889 TP 40-90/4 A-F-A-BQQE-CX3 50

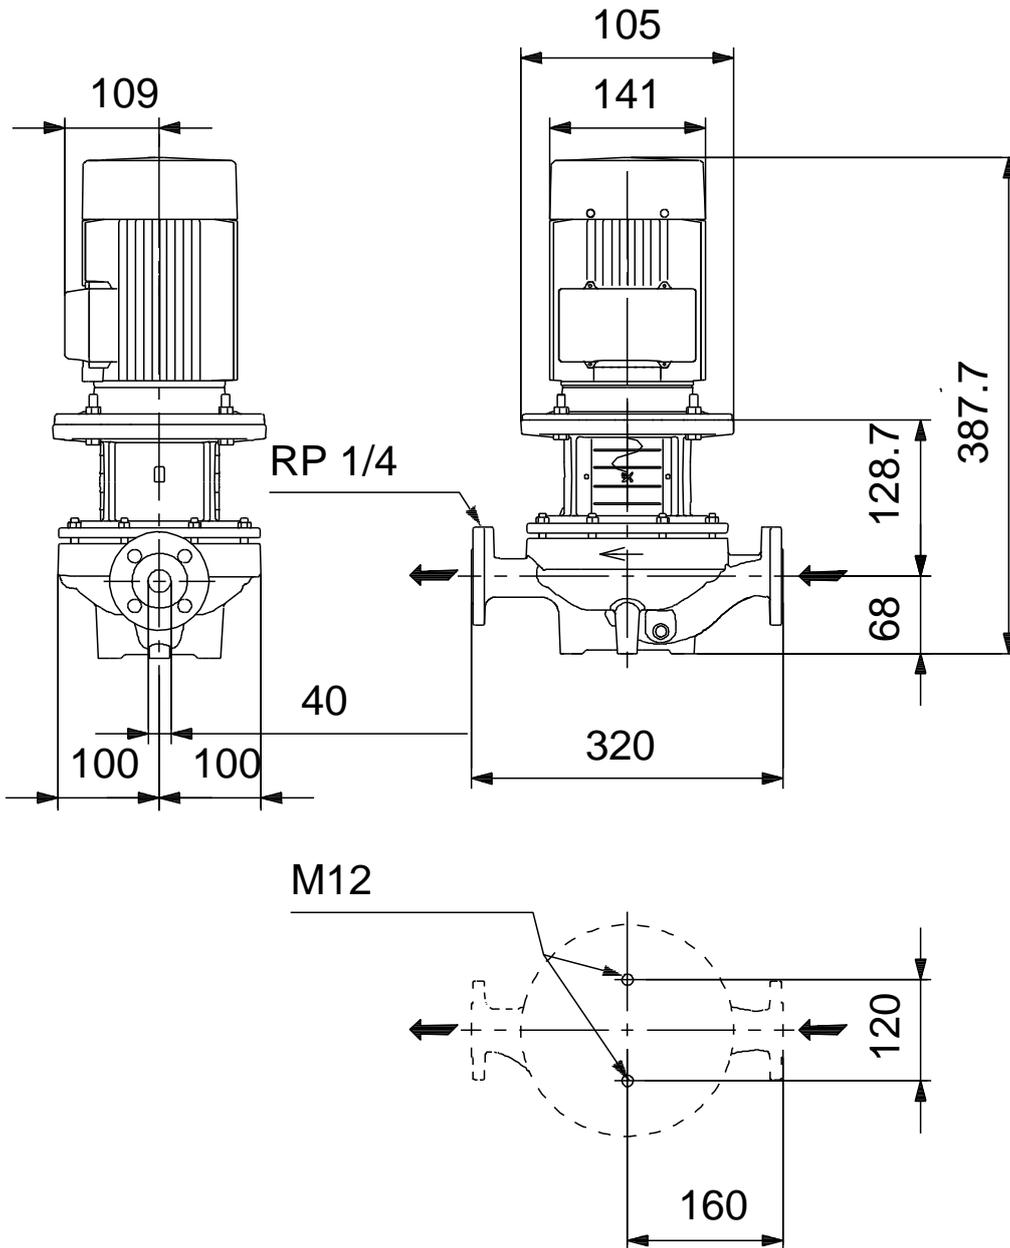

98462889 TP 40-90/4 A-F-A-BQQE-CX3 50

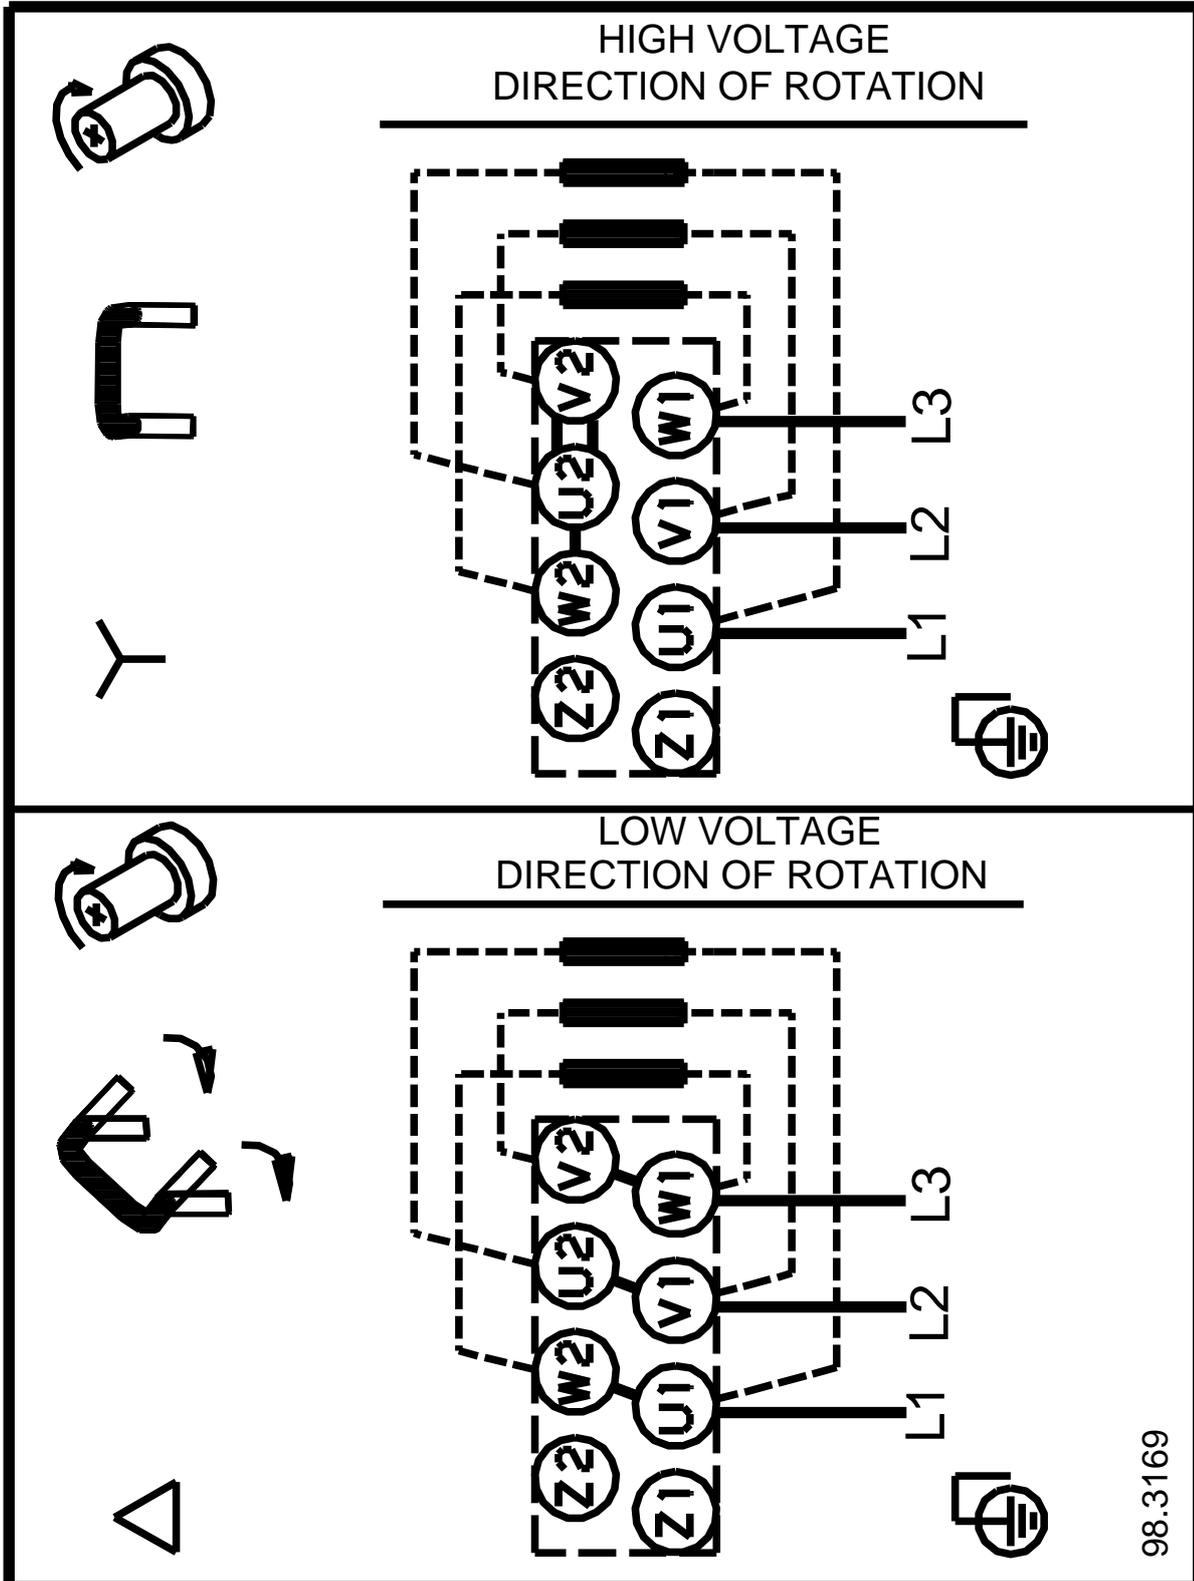

98.3169