

1 TPE 32-200/2 A-F-A-BQQE-GD1



: 98514344

12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

EN

IE5

IEC 60034-30-2.

Frequency converter:

: -25 .. 120 °C  
: 20 °C  
: 998.2 / 3

: 2900 /

: 13.6 3/  
: 16

: 129  
: BQQE  
- : ISO9906:2012 3B2

c : EN-GJL-250  
: ASTM class 35



, EN/DIN: EN-GJL-200  
, AISI/ASTM: ASTM class 30

: -20 .. 50 °C

: 16  
- : 16 / 120 °C  
: DIN

: DN 32  
 : PN 16  
 : 340  
 : FF165  
 :  
 : 80B  
 - : IE5  
 - P2: 1.1  
 : 50 Hz  
 : 3 x 380-500  
 : 2.20-1.90 A  
 Cos - : 0.89-0.79  
 : 360-4000 /  
 : 89.1% : 89.1 %  
 : 2  
 (IEC 34-5): IP55  
 (IEC 85): F  
 : 98534623  
 :  
 , MEI : 0.70  
 ( ): 42.3  
 ( ): 53  
 : 0.16 <sup>3</sup>  
 C : HU  
 : 8413705100

## 98514344 TPE 32-200/2 A-F-A-BQQE-GD1 50

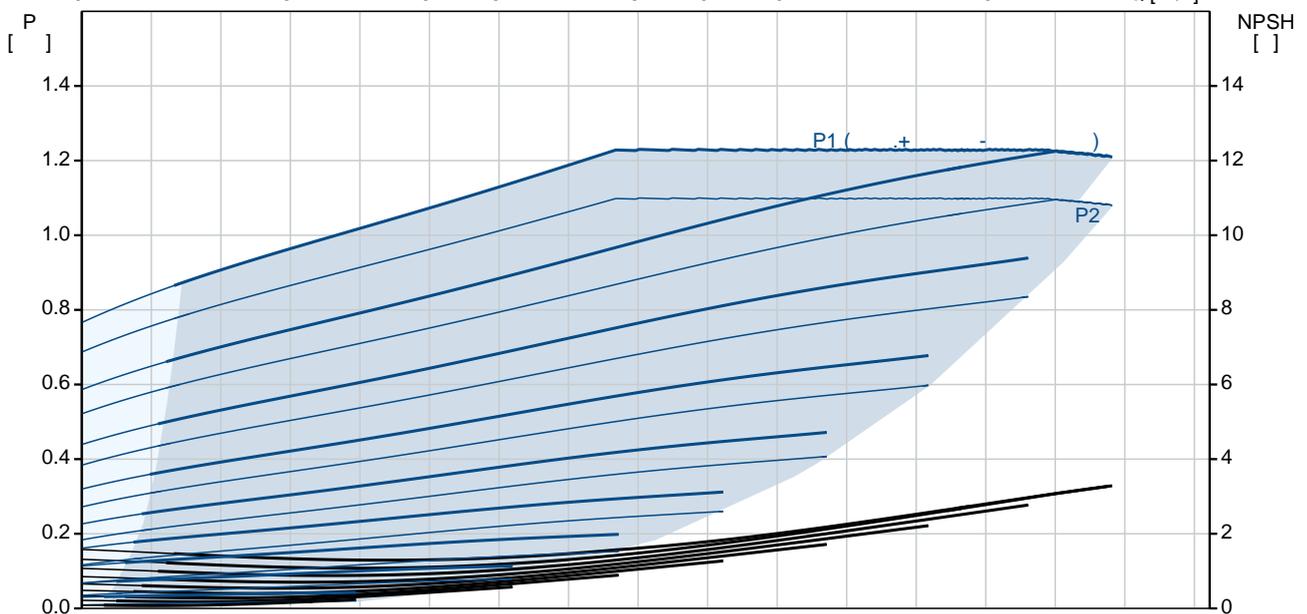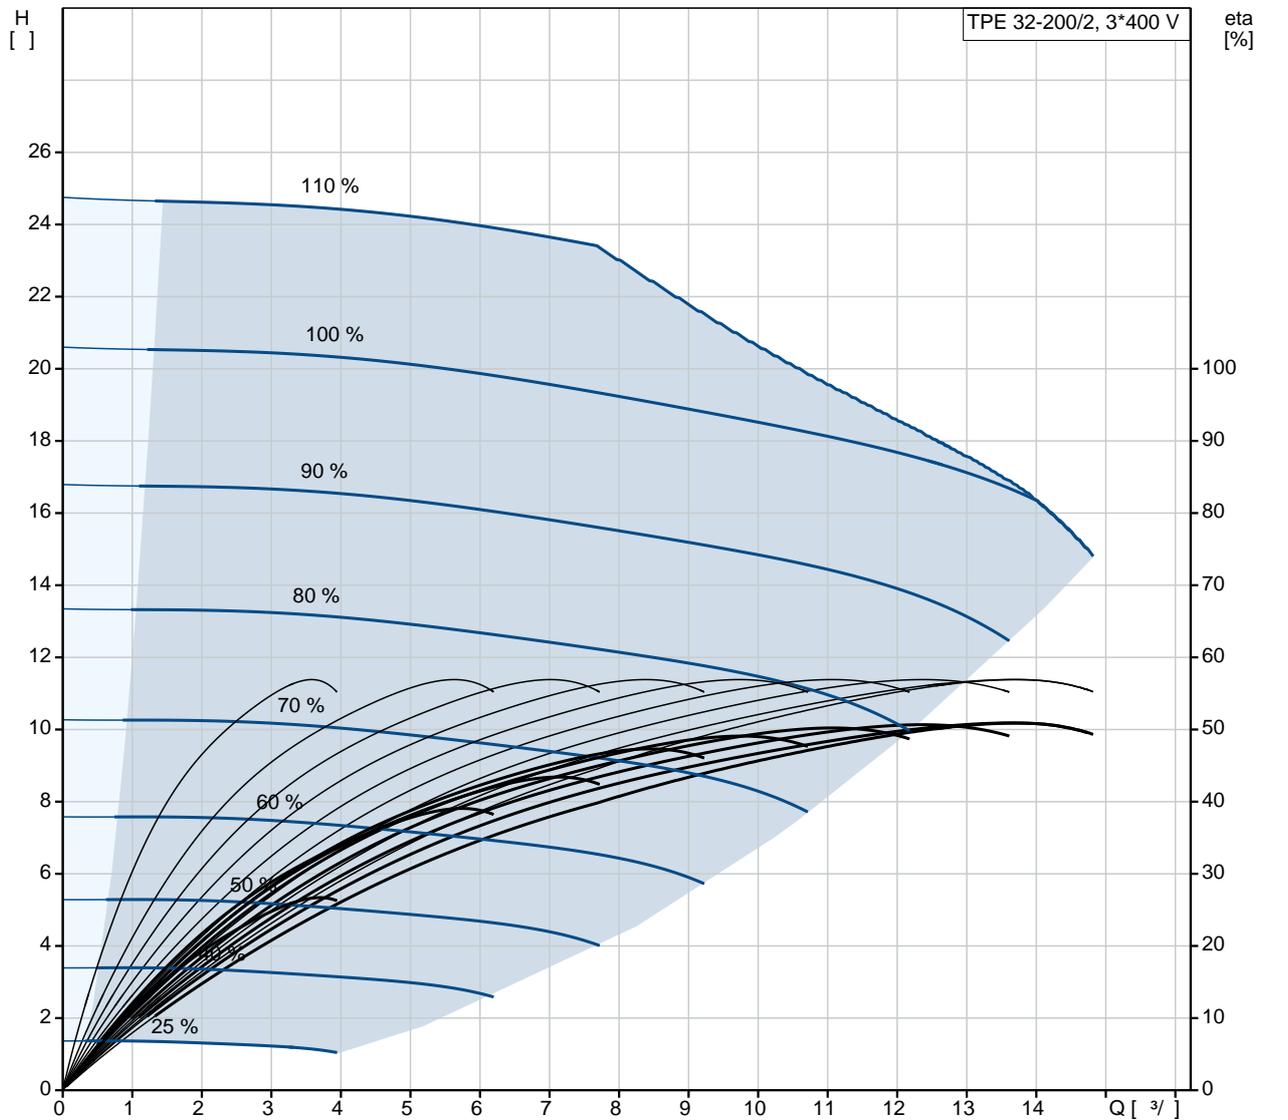

TPE 32-200/2  
 A-F-A-BQQE-GD1  
[98514344](#)  
 EAN : 5711496403507

2900 /  
 13.6 <sup>3</sup>/<sub>l</sub>  
 16  
 200  
 129  
 BQQE  
 ISO9906:2012 3B2  
 A

c : EN-GJL-250  
 ASTM class 35

, EN/DIN: EN-GJL-200  
 , AISI/ASTM: ASTM class 30  
 A

-20 .. 50 °C

16  
 16 / 120 °C

DIN

: DN 32

: PN 16

: 340

: FF165

: F

: -25 .. 120 °C

: 20 °C

: 998.2 / <sup>3</sup>

: 80B

- : IE5

- P2: 1.1

: 50 Hz

: 3 x 380-500

: 2.20-1.90 A

Cos : 0.89-0.79

: 360-4000 /





: 89.1%

: 89.1 %

: 2


(IEC 34-5): IP55

(IEC 85): F

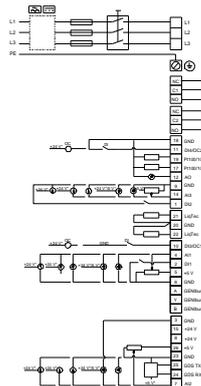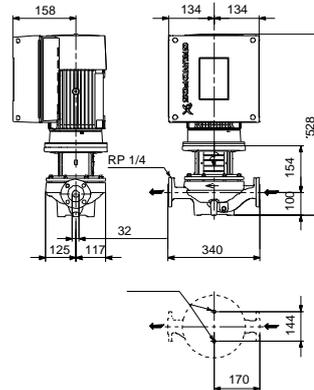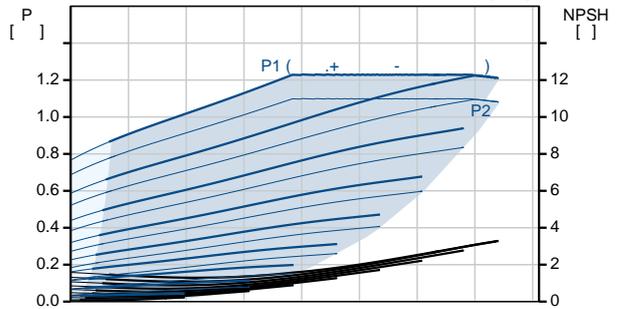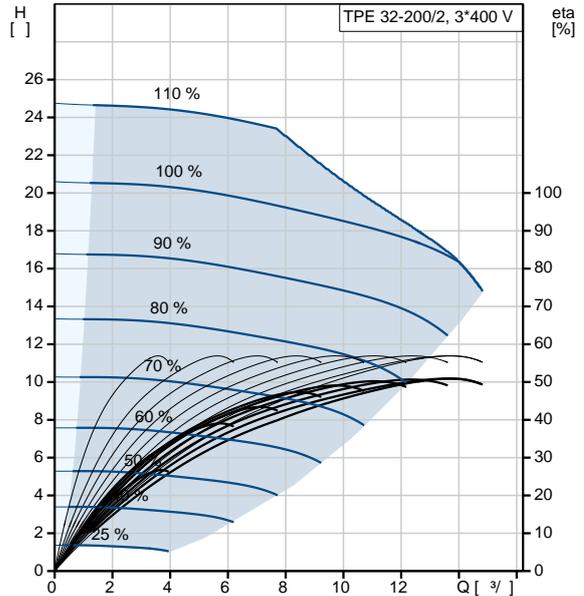



## 98514344 TPE 32-200/2 A-F-A-BQQE-GD1 50

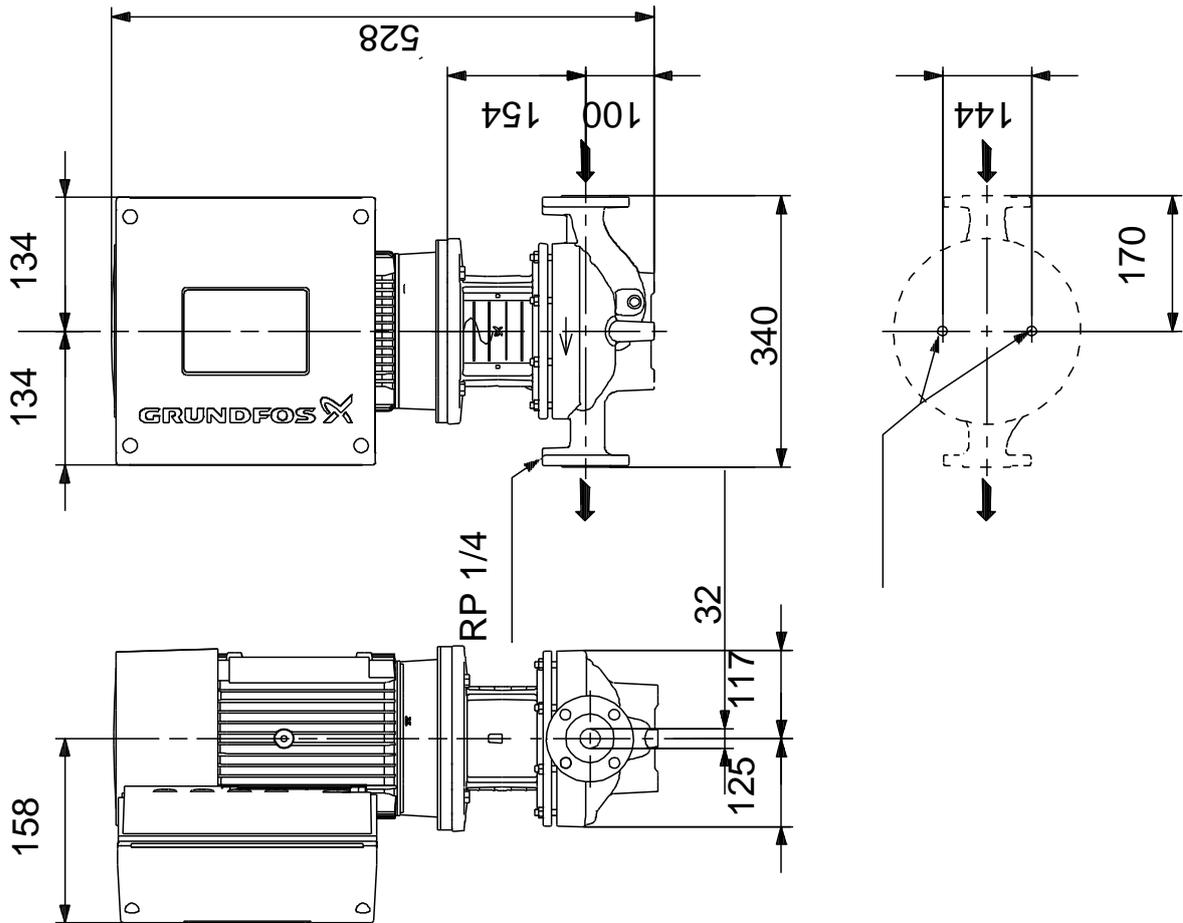

## 98514344 TPE 32-200/2 A-F-A-BQQE-GD1 50

