

1 SCALA2 3-45 A



: [98562862](#)

SCALA2 Grundfos

. SCALA2

SCALA2

- 1.
- 2.
- 3.

SCALA2

-
-
-
-
-

5

8

24

5

8

53 ()



,47 ()

SCALA2




: 0 .. 45 °C

: 20 °C
 : 998.2 / 3
 :
 : 3 3/
 : 27
 : CARBON/CERAMIC
 : CE,VDE,MORO,AAA
 Approvals for drinking water: WRAS,ACS
 - : ISO9906:2012 3B
 :
 : Composite
 : NORYL FE1630PW PPE+PS-GS30
 :
 , EN/DIN: NORYL FE1630PW PPE+PS-GS30
 :
 : 0 .. 55 °C
 : 10
 Maximum permissible inlet pressure: 6
 Type of inlet connection: R
 Type of outlet connection: R
 : 1 inch
 : 1 inch
 : PN 10
 :
 - P1: 550
 : 50 / 60 Hz
 : 1 x 200-240
 : 2.8 A
 (IEC 34-5): IPX4D
 (IEC 85): F
 : 2
 : Type E/F (CEE7/7)
 Power plug:
 :
 : 9.58
 (): 12.2
 : 0.044 3
 : -40 .. 70 °C
 Danish VVS No.: 385183145
 Swedish RSK No.: 5931159
 Finnish LVI No.: 4732505
 Norwegian NRF no.: 9040011

98562862 SCALA2 3-45 A

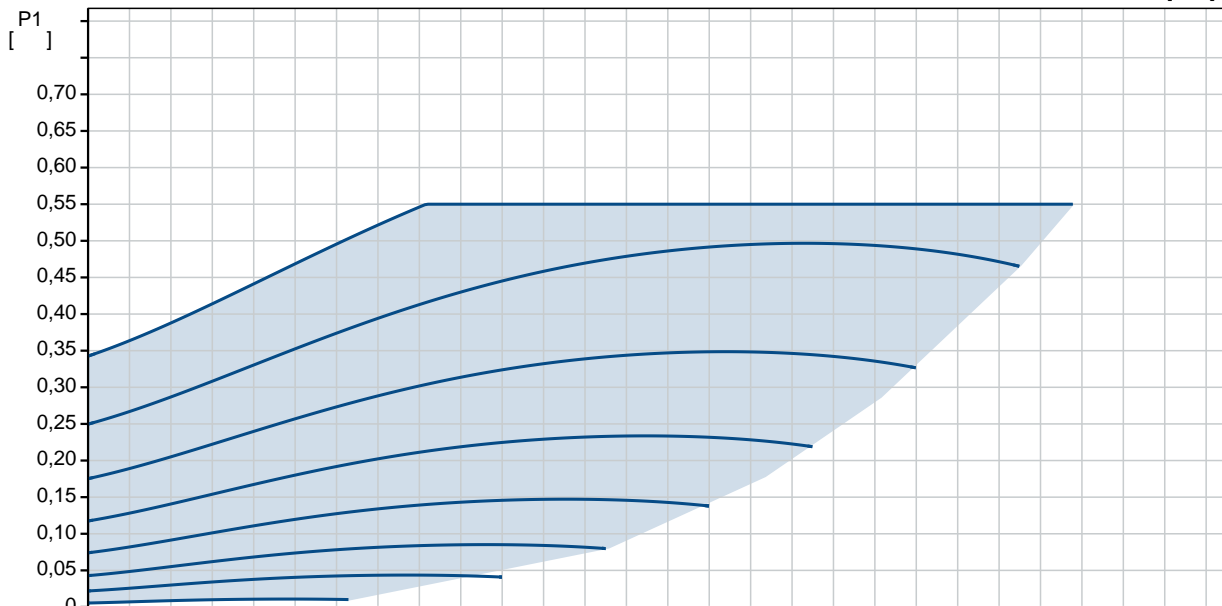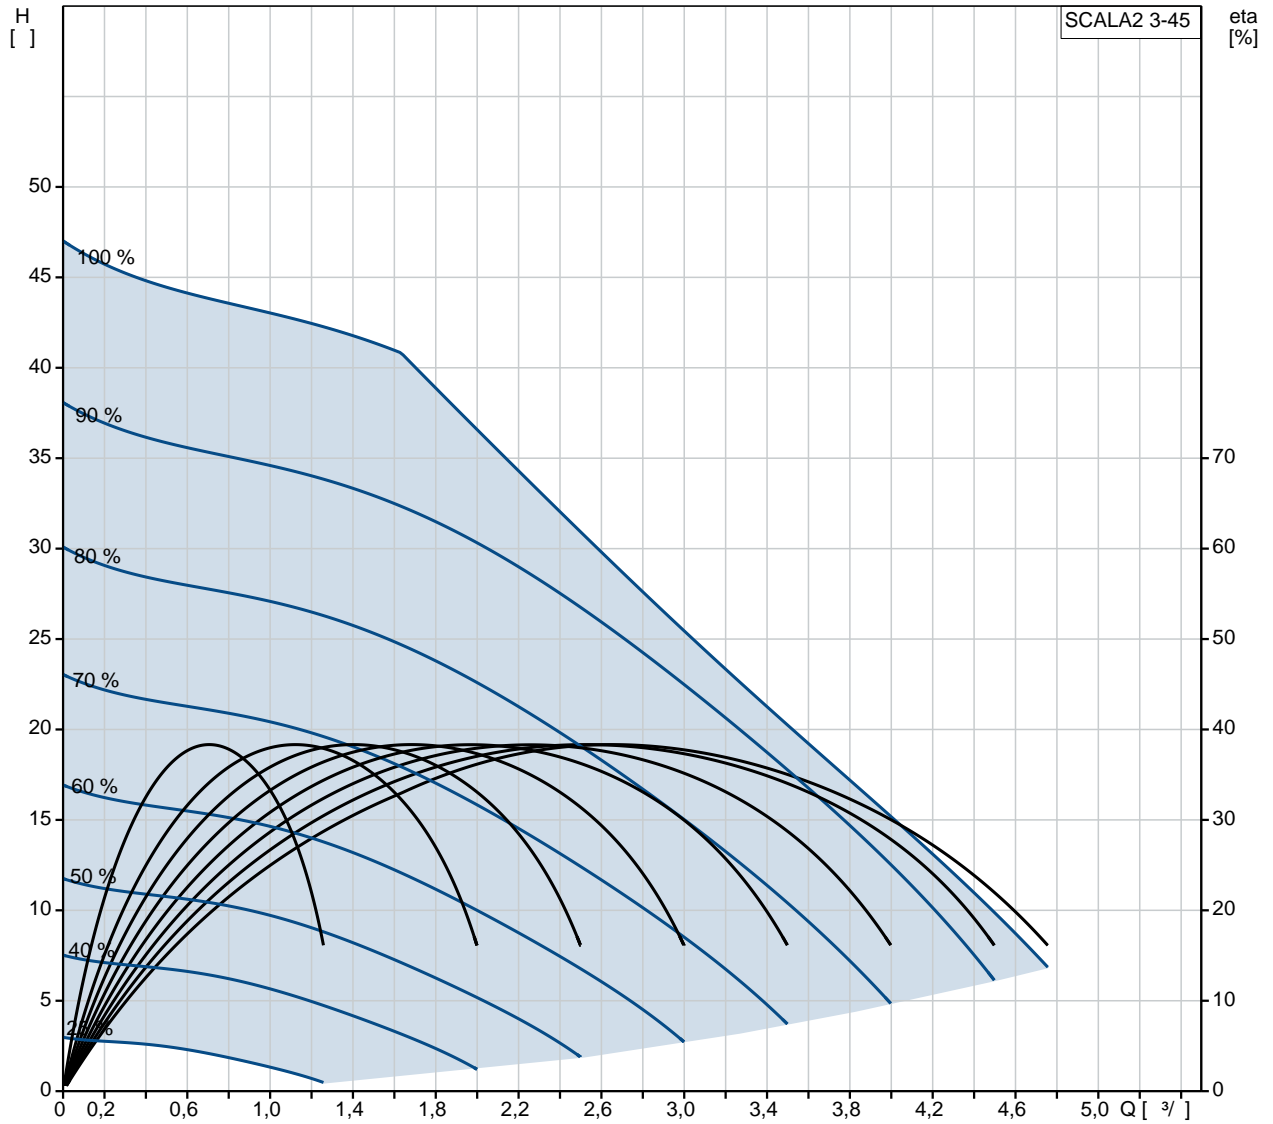

Model:	SCALA2 3-45 A
EAN:	98562862 5711497234216
Maximum head:	3 3/4 27 45
Approvals for drinking water:	CARBON/CERAMIC CE,VDE,MORO,AAA WRAS,ACS ISO9906:2012 3B A
Material:	Composite NORYL FE1630PW PPE+PS-GS30
Material, EN/DIN:	NORYL FE1630PW PPE+PS-GS30 A
Maximum permissible inlet pressure:	0 .. 55 °C 10 6
Type of inlet connection:	R
Type of outlet connection:	R
	1 inch 1 inch PN 10
	0 .. 45 °C 20 °C 998.2 / 3
	- P1: 550 50 / 60 Hz 1 x 200-240 2.8 A (IEC 34-5): IPX4D (IEC 85): F 2 Type E/F (CEE7/7)
Power plug:	
	9.58 (): 12.2 0.044 3 -40 .. 70 °C
Danish VVS No.:	385183145
Swedish RSK No.:	5931159
Finnish LVI No.:	4732505
Norwegian NRF no.:	9040011

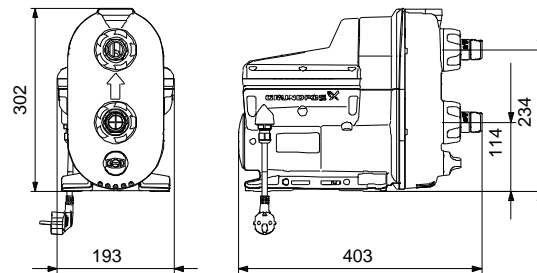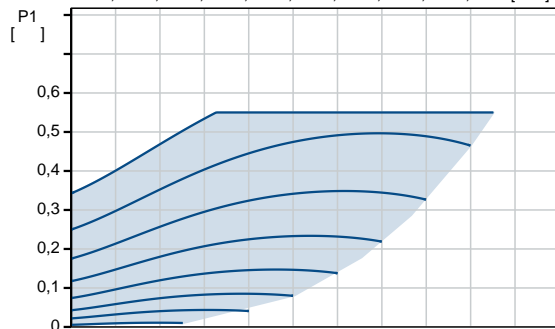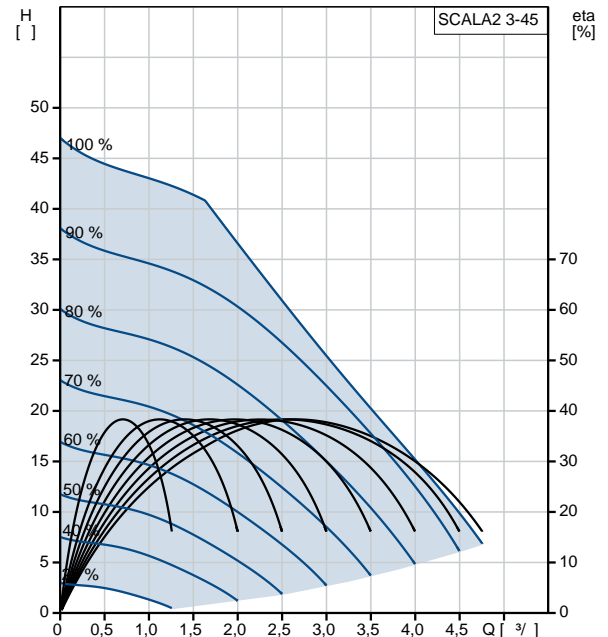

98562862 SCALA2 3-45 A

