

1 TP 65-120/2 A-F-A-BQQE-GX1



: [98585759](#)

12756. Pipework connection is via PN 6/10 DIN flanges (EN 1092-2 and ISO 7005-2).

EN

Frequency converter:

: -25 .. 120 °C  
: 20 °C  
: 998.2 / <sup>3</sup>

: 2880 /

: 25.1 <sup>3</sup>/<sub>l</sub>  
: 8.16  
: 91  
: BQQE

- : ISO9906:2012 3B2

c : EN-GJL-250  
: ASTM class 35


, EN/DIN: EN 1.4301  
, AISI/ASTM: AISI 304

: -30 .. 60 °C

: 10  
- : 10 / 120 °C  
: DIN  
: DN 65

: PN 6/10  
 : 340  
 : FT100  
 :  
 : 80C  
 - : IE3  
 - P2: 1.1  
 : 50 Hz  
 : 3 x 220-240D/380-415Y  
 : 4.35/2.50 A  
 : 450-500 %  
 Cos - : 0.83-0.76  
 : 2840-2870 /  
 : IE3 82,7%  
 : 82.7 %  
 3/4 : 84.6 %  
 1/2 : 85.4 %  
 : 2  
 (IEC 34-5): 55 Dust/Jetting  
 (IEC 85): F  
 : 85U05105  
 :  
 , MEI : 0.59  
 ( ): 34.2  
 ( ): 37.7  
 : 0.08 <sup>3</sup>  
 Danish VVS No.: 38 1814.120  
 Finnish LVI No.: 4616072  
 Norwegian NRF no.: 9043574  
 C : RU  
 : 8413705100

## 98585759 TP 65-120/2 A-F-A-BQQE-GX1 50

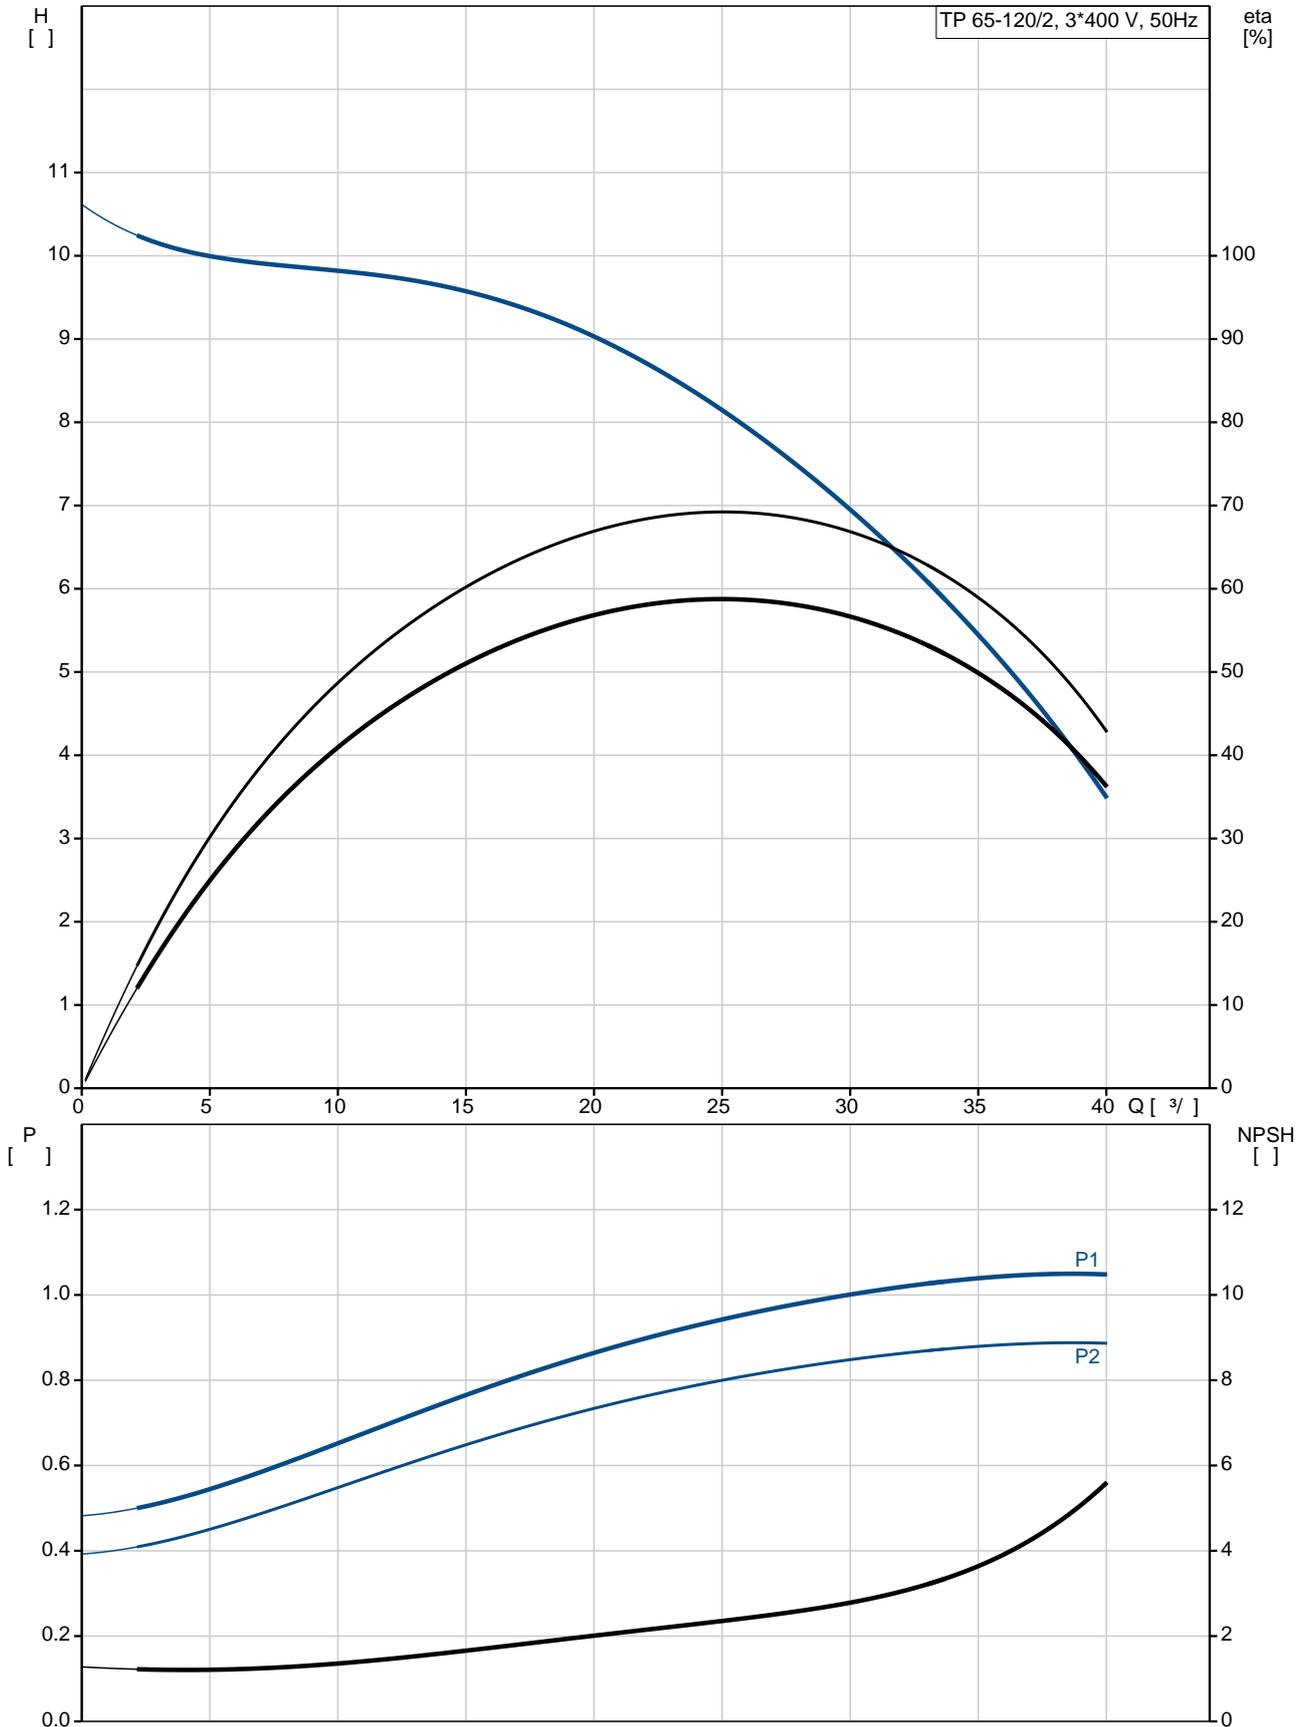

TP 65-120/2  
A-F-A-BQQE-GX1  
98585759  
EAN : 5711497681317

2880 /  
25.1 <sup>3</sup>/<sub>l</sub>  
8.16  
120  
91  
BQQE  
ISO9906:2012 3B2  
A

c : EN-GJL-250  
ASTM class 35

EN/DIN: EN 1.4301  
AISI/ASTM: AISI 304  
A

-30 .. 60 °C

10

10 / 120 °C

DIN

DN 65

PN 6/10

340

FT100

F

-25 .. 120 °C

20 °C

998.2 / <sup>3</sup>

80C

IE3

- P2: 1.1

50 Hz

3 x 220-240D/380-415Y

4.35/2.50 A

450-500 %

Cos : 0.83-0.76

2840-2870 /

IE3 82,7%





82.7 %

3/4 84.6 %

1/2 : 85.4 %


2

(IEC 34-5): 55 Dust/Jetting

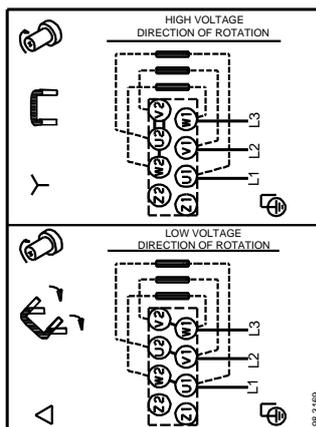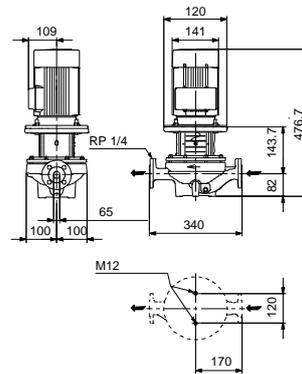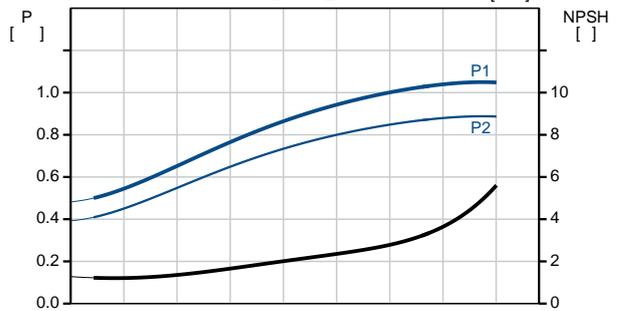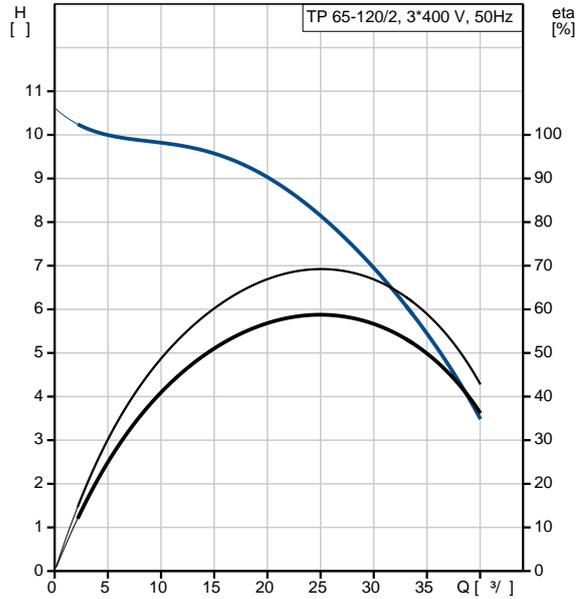


(IEC 85):	F
:	.
:	85U05105
:	.
:	.
:	.
:	.
, MEI :	0.59
( ):	34.2
( ):	37.7
:	0.08 <sup>3</sup>
Danish VVS No.:	38 1814.120
Finnish LVI No.:	4616072
Norwegian NRF no.:	9043574
C :	RU
:	8413705100

## 98585759 TP 65-120/2 A-F-A-BQQE-GX1 50

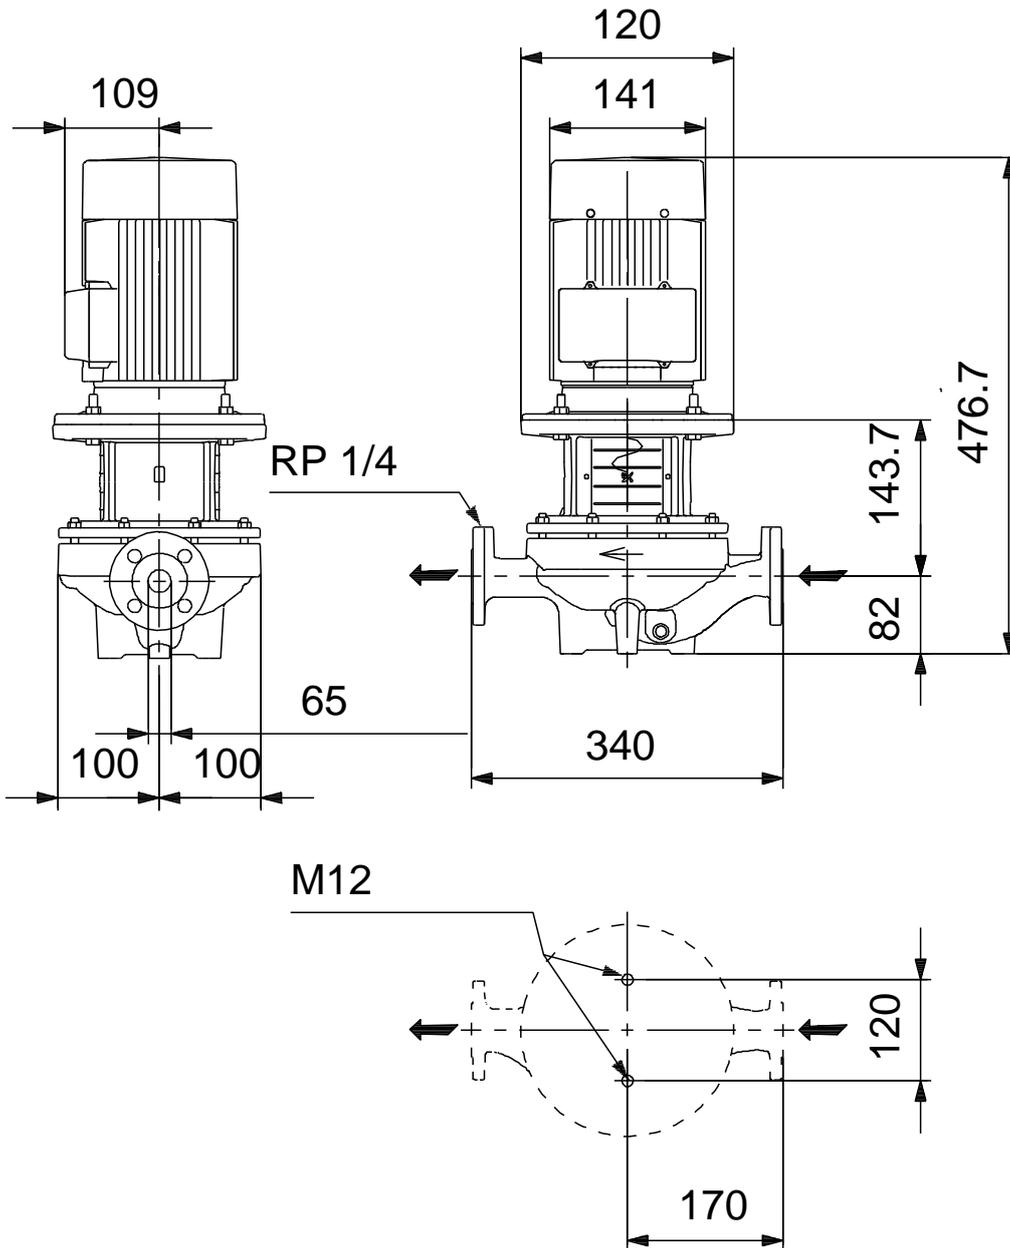

## 98585759 TP 65-120/2 A-F-A-BQQE-GX1 50

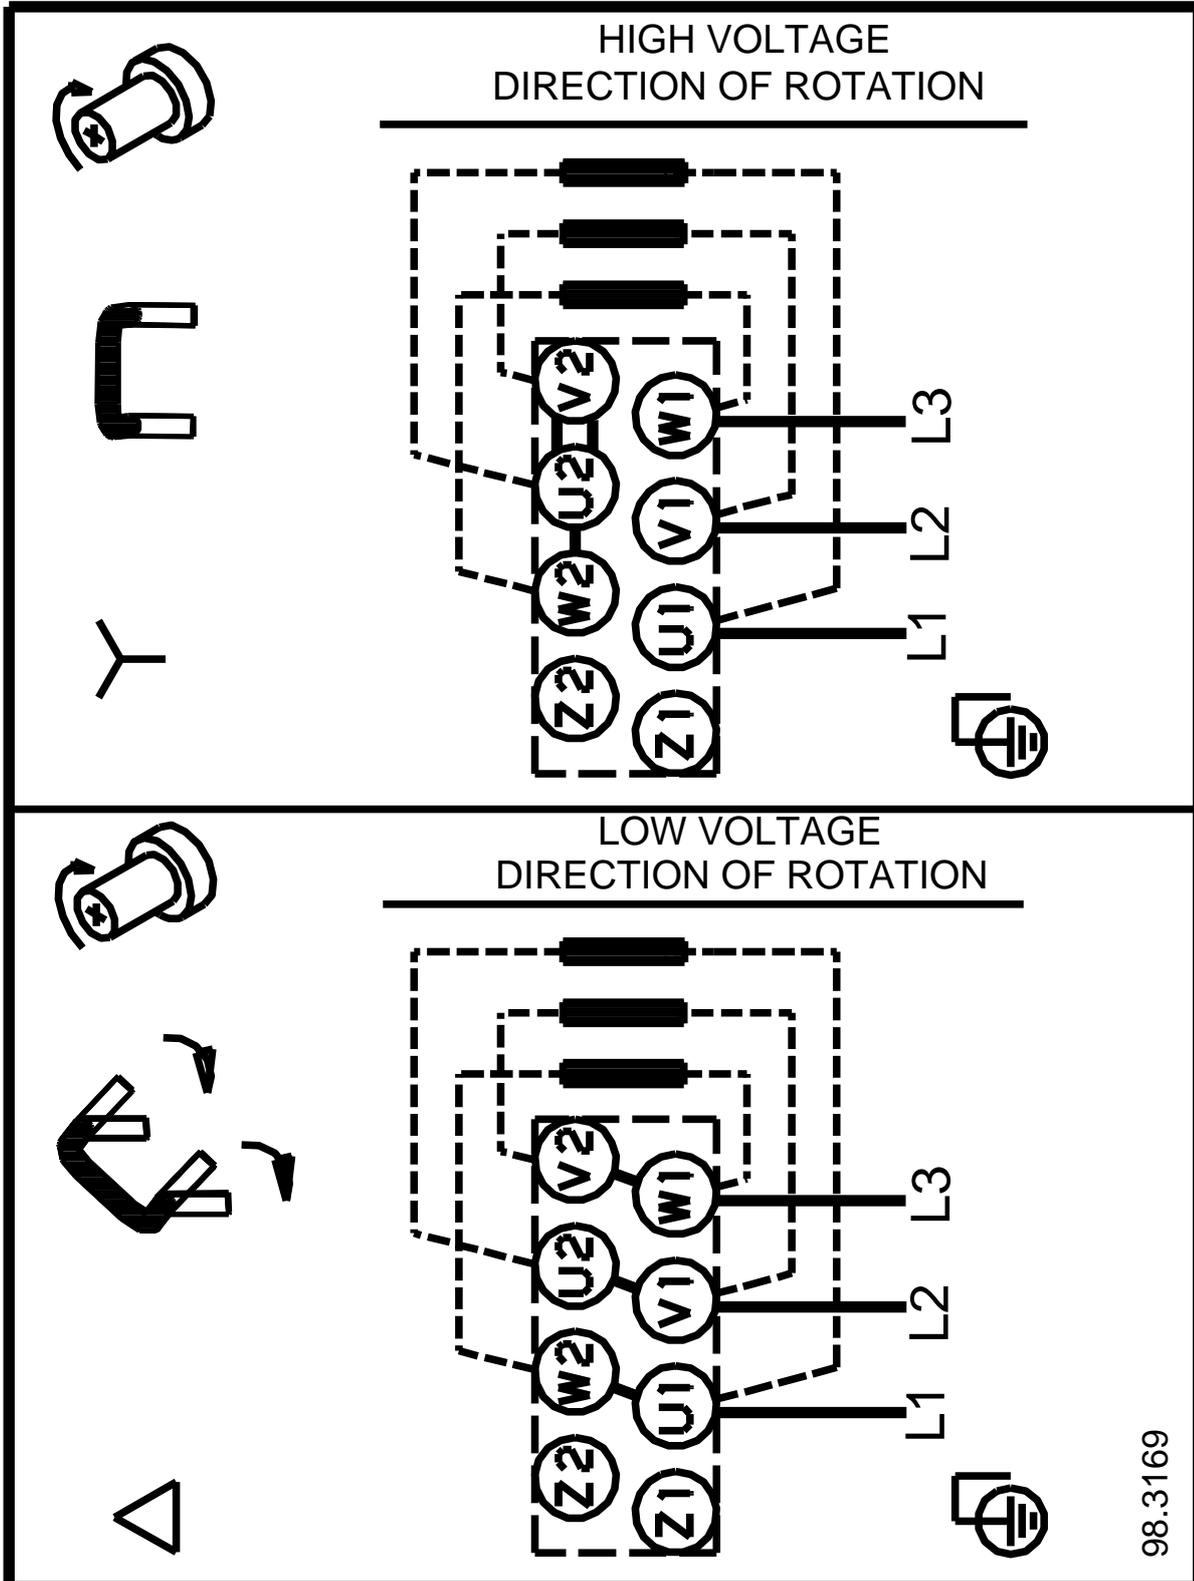

98.3169