

1 SP 9-5



: 98699022

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 .t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³

: 2900 /

9 ³/
 25.5
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

MEI : 0.70

98699022 SP 9-5 50

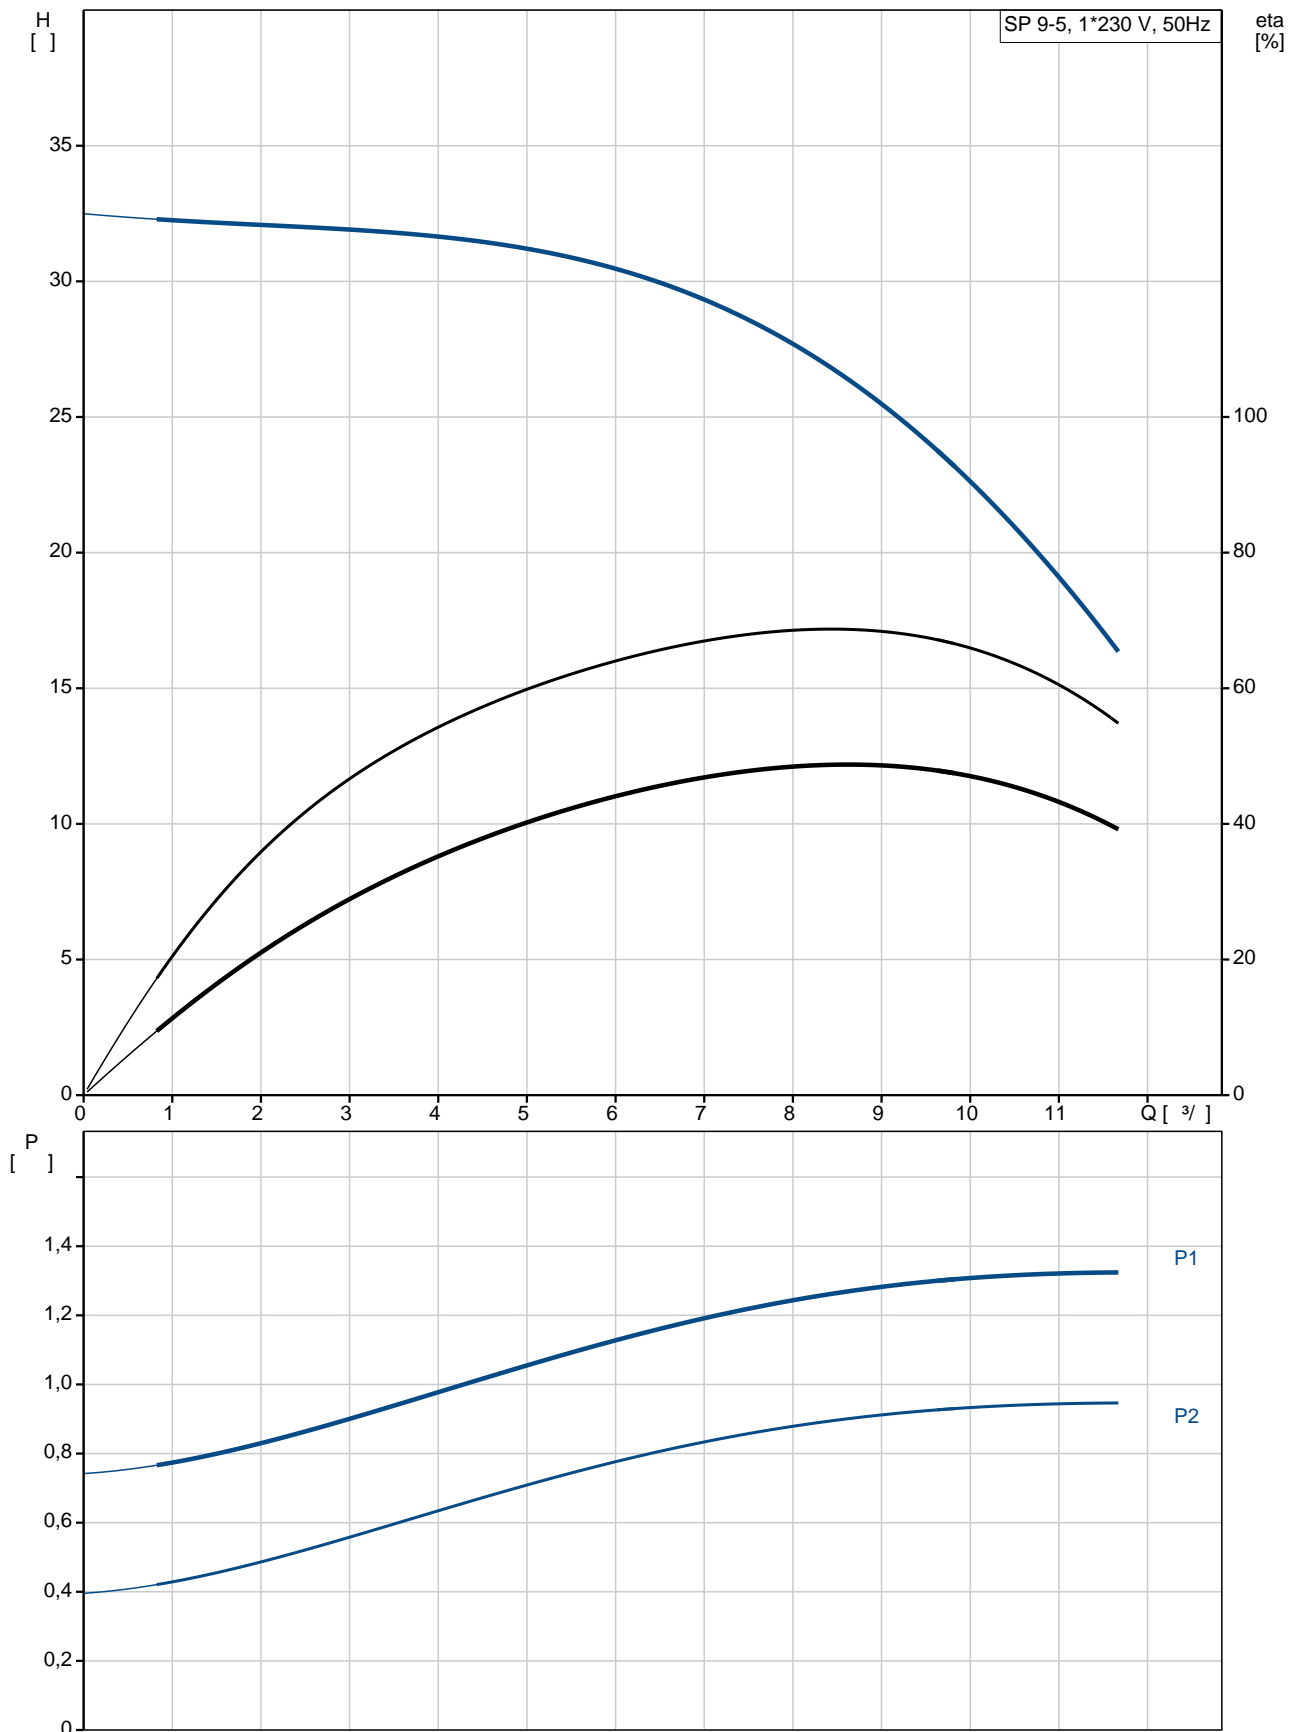

SP 9-5
 EAN : 98699022
 5712600105270

2900 /
 9 3/
 25.5
 5
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304





Rp2
 4 inch

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 CSCR
 NEMA
 - P2: 1.1
 (2), 1.1


50 Hz
 1 x 230
 7.3 A
 480 %
 Cos - : 0.99
 2860 /

(IEC 34-5): IP68
 (IEC 85): B
 CONTACT
 79213105

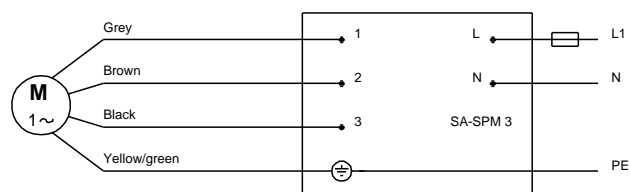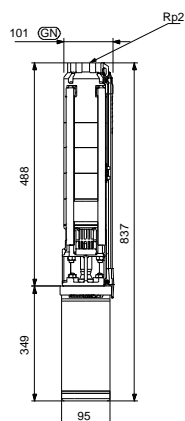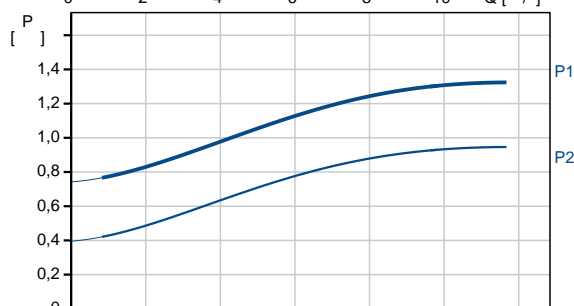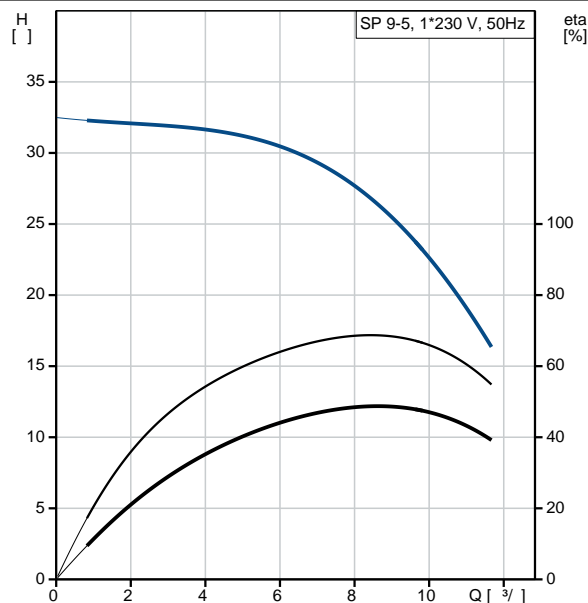

		MEI :	0.70
ErP	:	EuP	/ .
	:		17.7
	:		19.2
	:		0.016 ³
C	:	DK	
	:		8413702900

98699022 SP 9-5 50

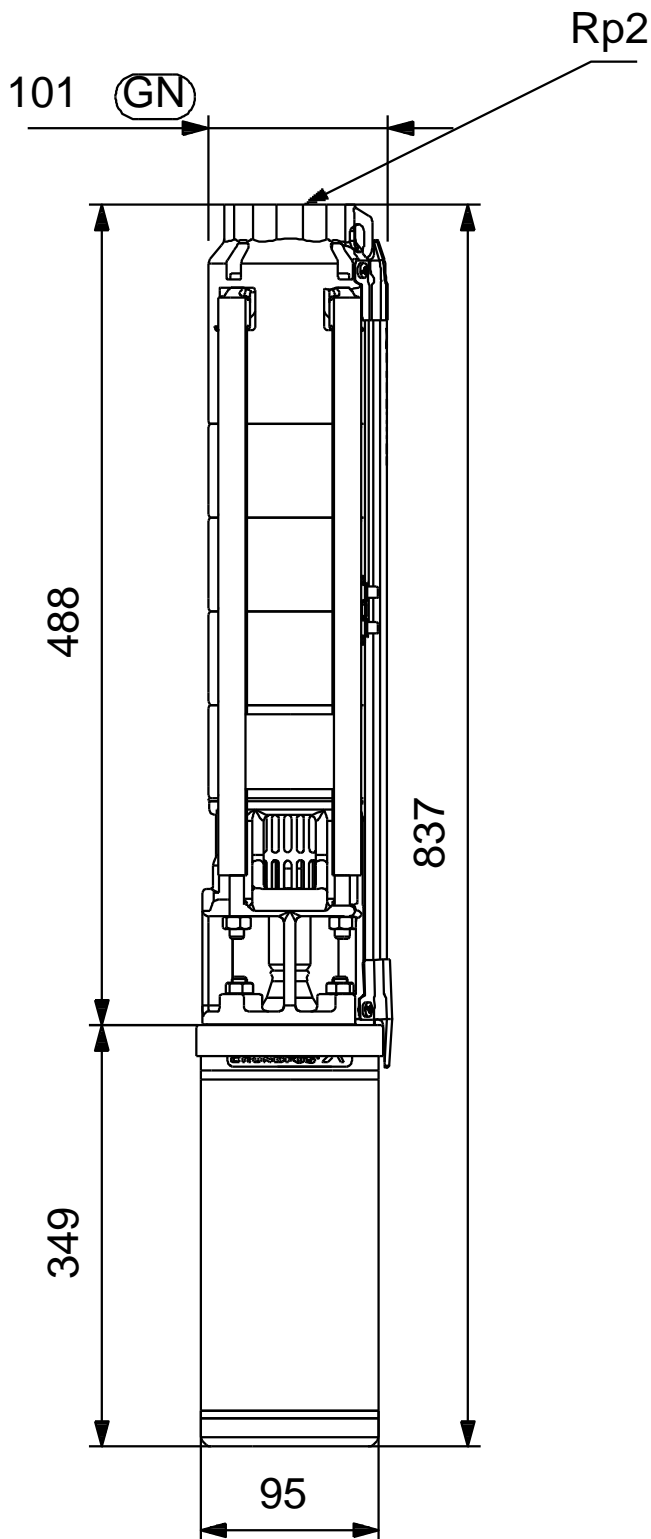

98699022 SP 9-5 50

