

1 SP 9-8



: 98699023

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 .t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 9 ³/₄
 : 41.5
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

: Rp2
 : 4 inch
 :
 : MS402
 : CSCR
 - P2: 1.5
 (2), : 1.5
 : 50 Hz
 : 1 x 230
 : 10.2 A
 : 460 %
 Cos - : 0.98
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213106
 :
 ErP : MEI : 0.70
 : EuP /
 : 20
 : 21.7
 : 0.016 ³
 C : DK
 : 8413702900

98699023 SP 9-8 50

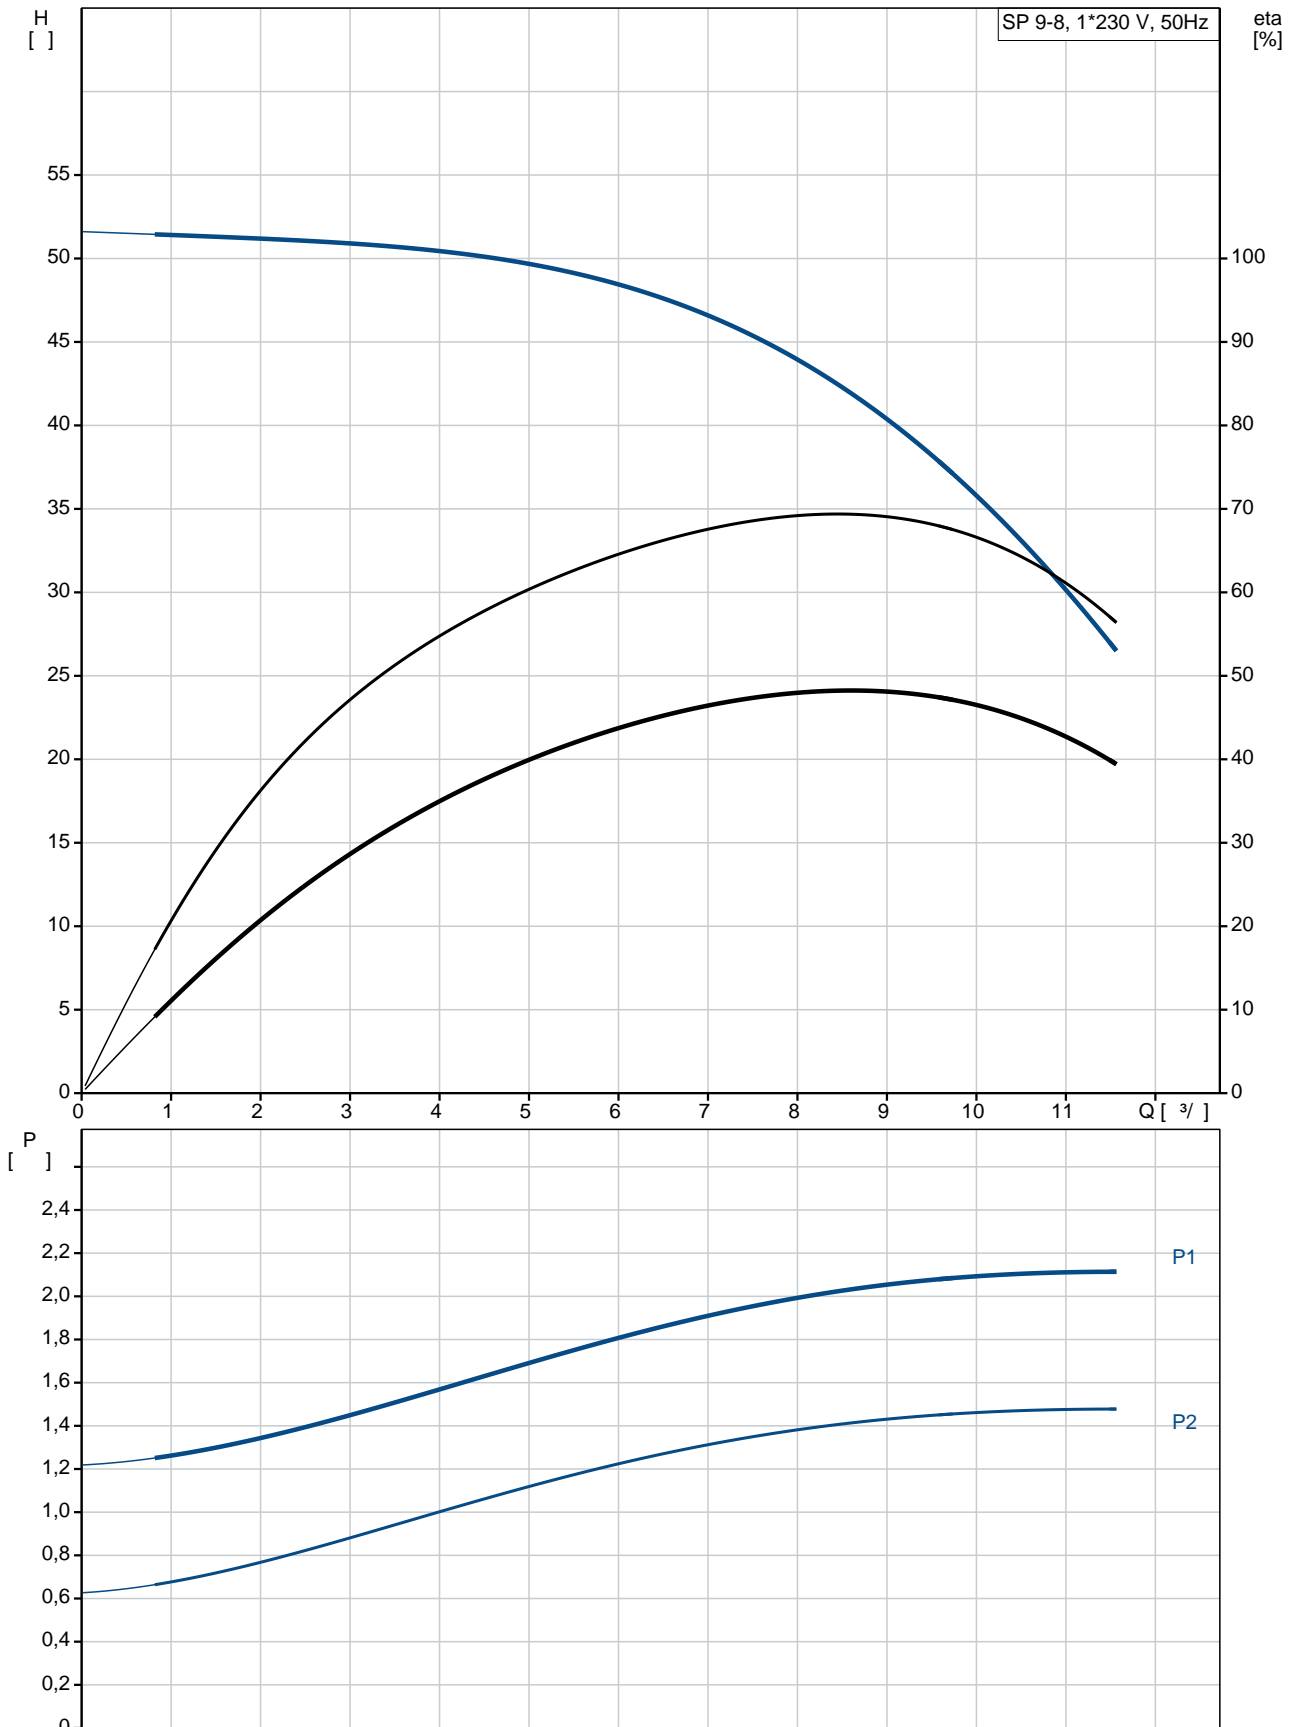


Model	SP 9-8
EAN	98699023 5712600105294
Flow rate	2900 /
Head	9 ^{3/4} 41.5
Number of poles	8
Protection class	NONE
Sealing	LIPSEAL
Certification	CE, EAC
Standard	ISO9906:2012 3B
Efficiency class	A
Energy efficiency	YES
Temperature class	T40
Material	EN 1.4301 AISI AISI 304
Material	EN 1.4301 AISI AISI 304
Material	DIN W.-Nr. 1.4301 AISI 304
Port	Rp2
Port size	4 inch
Maximum liquid temperature	40 °C
Temperature rise	0,15 / 40 °C
Temperature	20 °C
Flow rate	998.2 / ³
Material	MS402
Material	CSCR
Material	NEMA
Material	- P2: 1.5
Material	(2), 1.5
Frequency	50 Hz
Speed	1 x 230
Current	10.2 A
Efficiency	460 %
Power factor	Cos - 0.98
Power	2860 /
Protection class	(IEC 34-5): IP68
Protection class	(IEC 85): B
Material	
Material	
Material	
Material	
Material	
Material	79213106

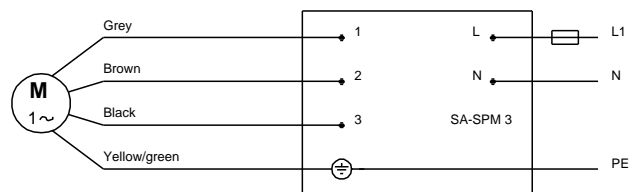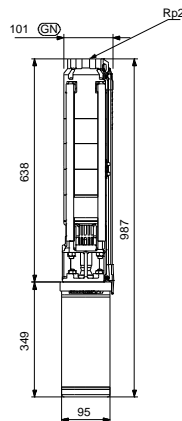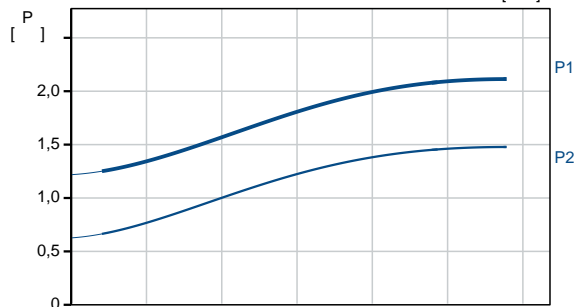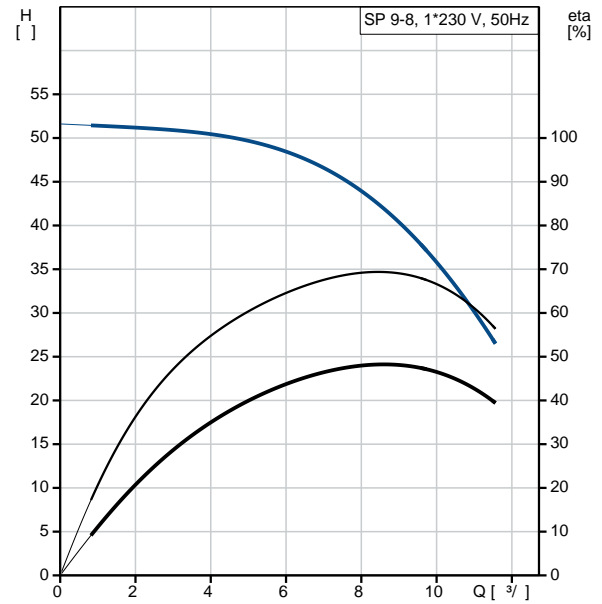


		MEI :	0.70
ErP	:	EuP	/ .
	:	20	
	:	21.7	
	:	0.016 ³	
C	:	DK	
	:	8413702900	

98699023 SP 9-8 50

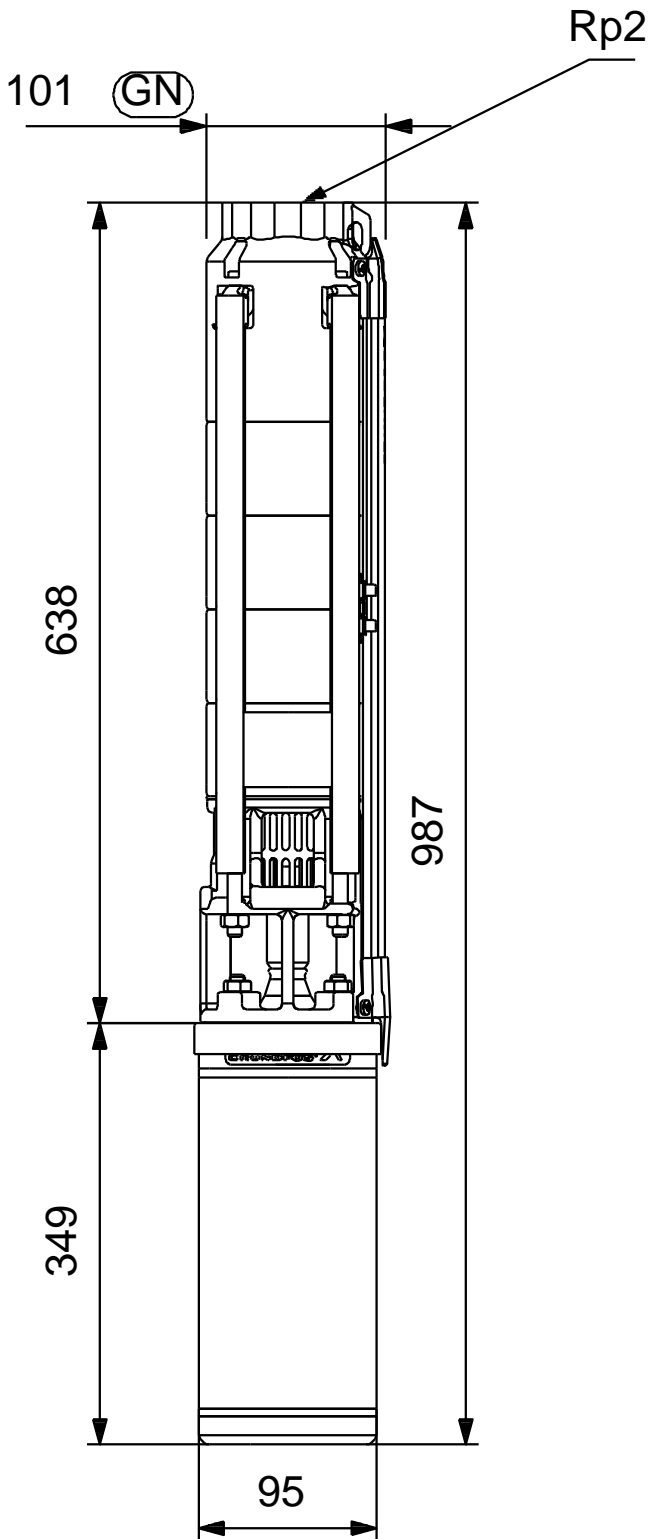

98699023 SP 9-8 50

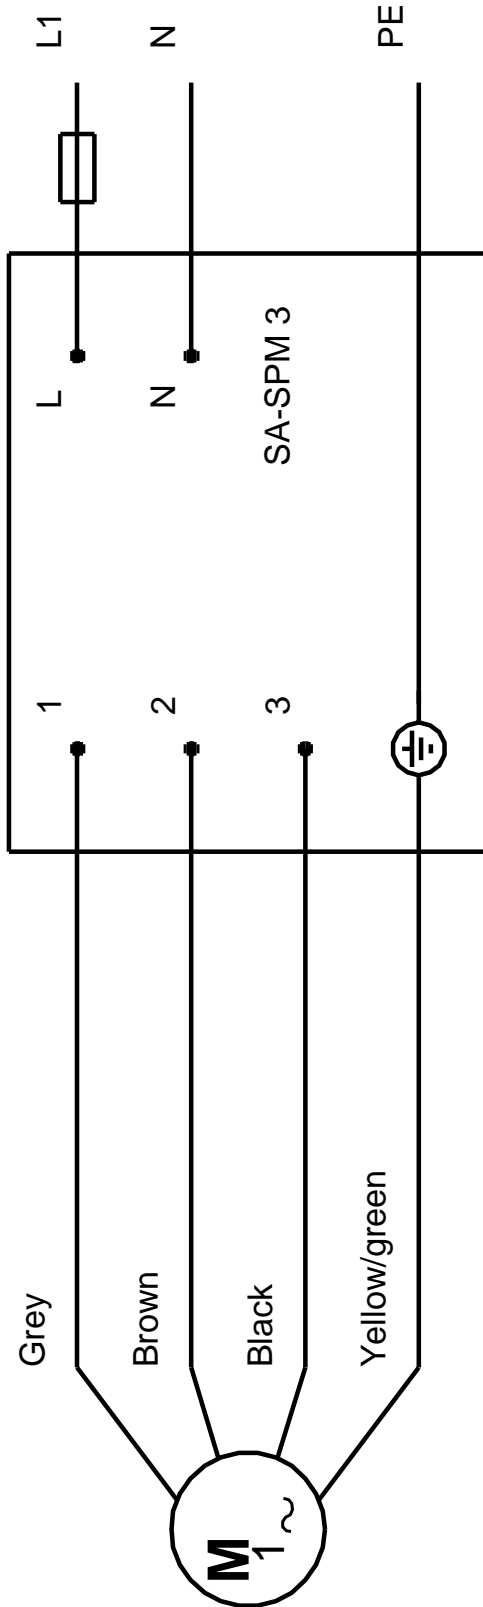

! [], .