

1 SP 9-5



: 98699053

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 9 <sup>3</sup>/  
 : 25.5  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304





DIN W.-Nr. 1.4301  
 AISI 304

: Rp2  
 : 4 inch  
 :  
 : MS402  
 - P2: 1.1  
 ( 2), : 1.1  
 : 50 Hz  
 : 3 x 380-400-415  
 : 3.25-3.40-3.65 A  
 : 480-480-470 %  
 Cos - : 0.76-0.72-0.65  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192005  
 :  
 MEI : 0.70  
 ErP : EuP /  
 : 16.1  
 : 17.6  
 : 0.016 <sup>3</sup>  
 Danish VVS No.: 388480005  
 Finnish LVI No.: 4762690  
 C : DK  
 : 8413702900

## 98699053 SP 9-5 50

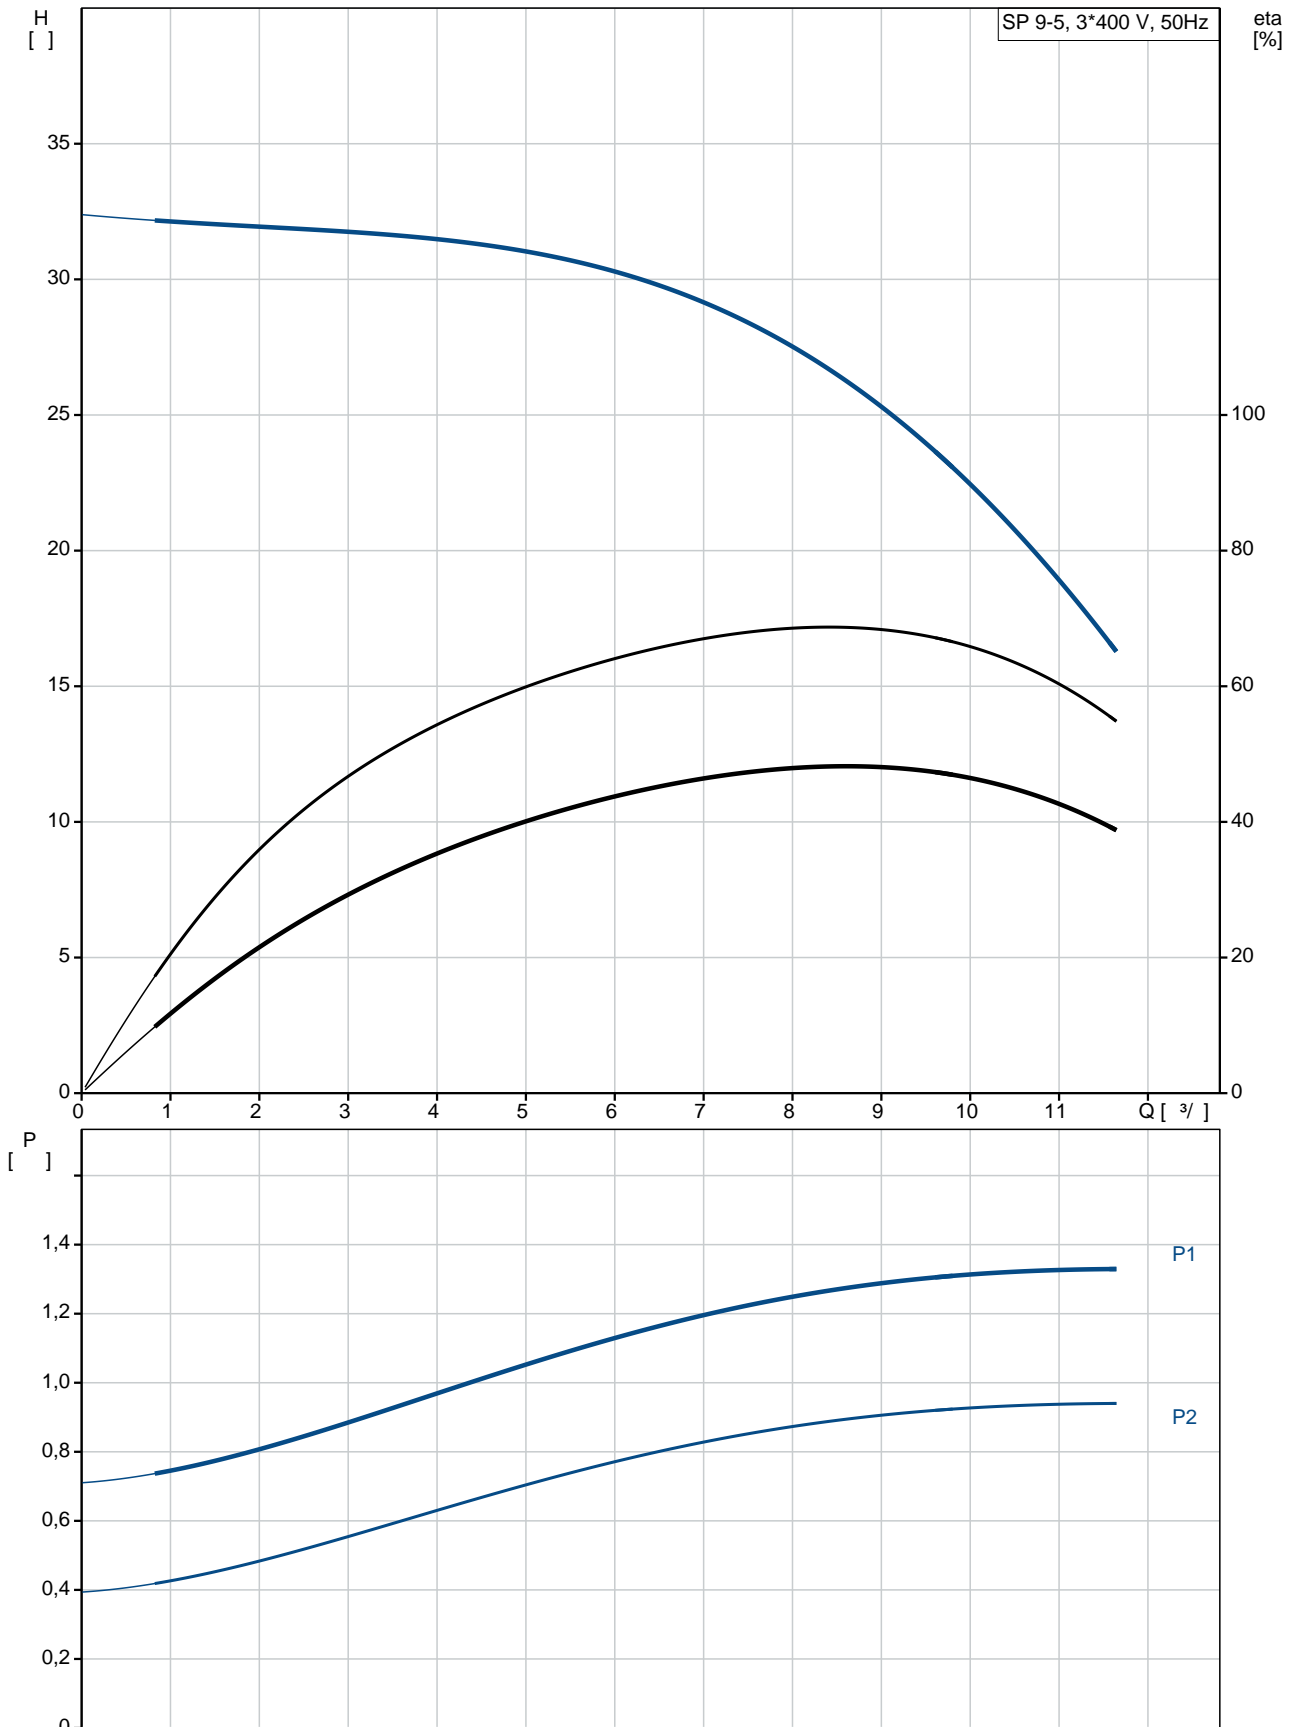


Model	SP 9-5
EAN	98699053 5712600105898
Flow rate	2900 /
Head	9 m
Power	25.5
Speed	5
Material	NONE
Sealing	LIPSEAL
Certification	CE, EAC
Standard	ISO9906:2012 3B
Efficiency class	A
Energy efficiency	YES
Temperature class	T40
Material	EN 1.4301 AISI AISI 304
Material	EN 1.4301 AISI AISI 304
Material	DIN W.-Nr. 1.4301 AISI 304
Port	Rp2
Port size	4 inch
Maximum liquid temperature	40 °C
Temperature	0,15 / 40 °C
Temperature	20 °C
Flow rate	998.2 / <sup>3</sup>
Material	MS402
Material	NEMA
Material	- P2: 1.1
Material	( 2), 1.1
Frequency	50 Hz
Current	3 x 380-400-415 3.25-3.40-3.65 A
Power factor	480-480-470 %
Cos φ	0.76-0.72-0.65
Power	2850-2860-2870 /
Protection class	(IEC 34-5): IP68 (IEC 85): B
Part number	79192005

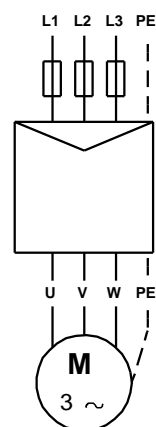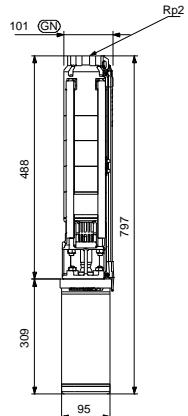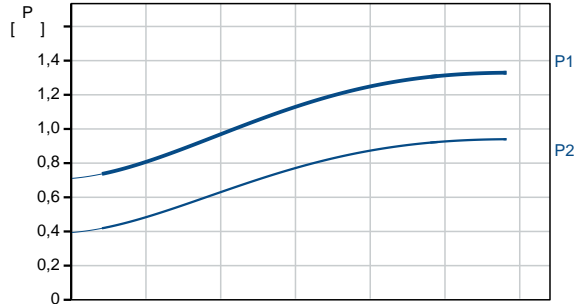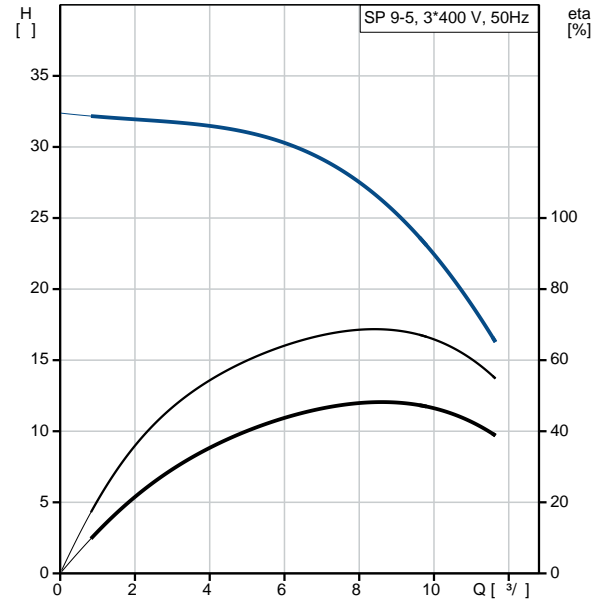


MEI :	0.70
ErP :	EuP / .
:	16.1
:	17.6
:	0.016 <sup>3</sup>
Danish VVS No.:	388480005
Finnish LVI No.:	4762690
C :	DK
:	8413702900

## 98699053 SP 9-5 50

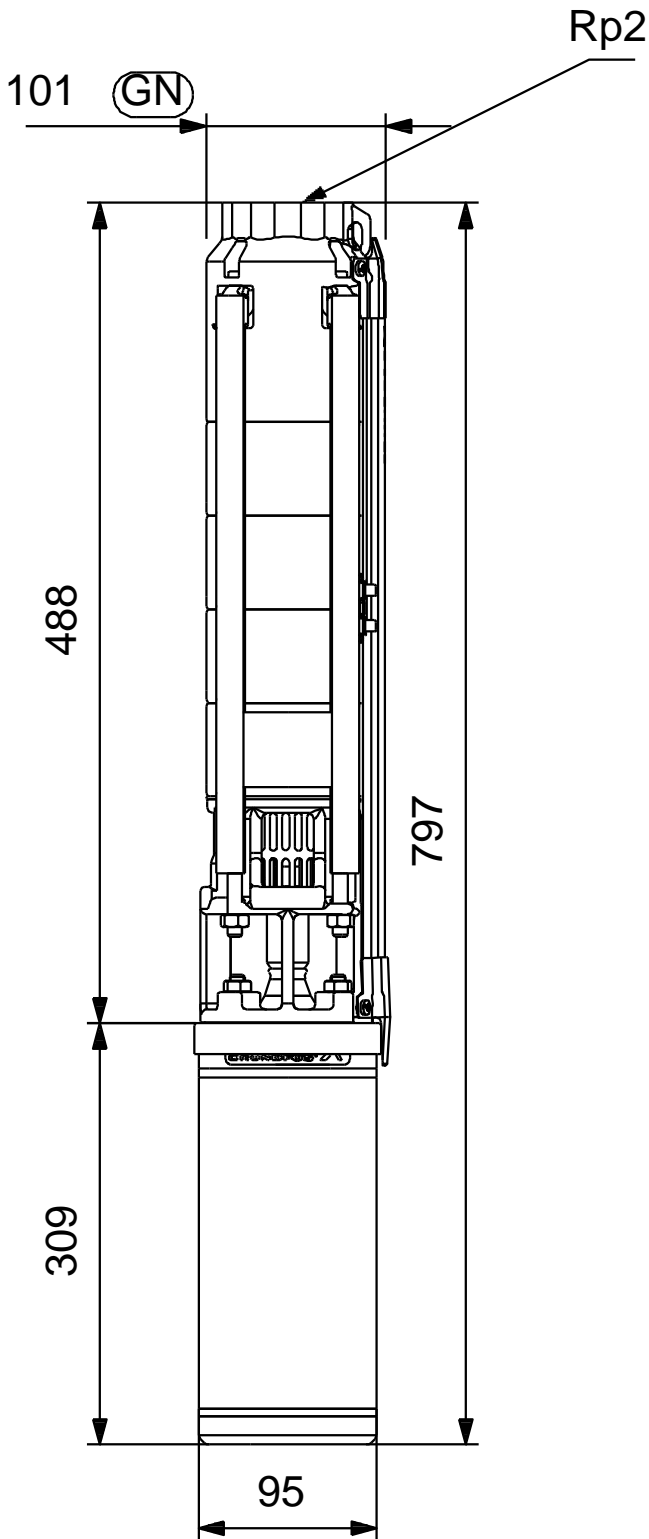

98699053 SP 9-5 50

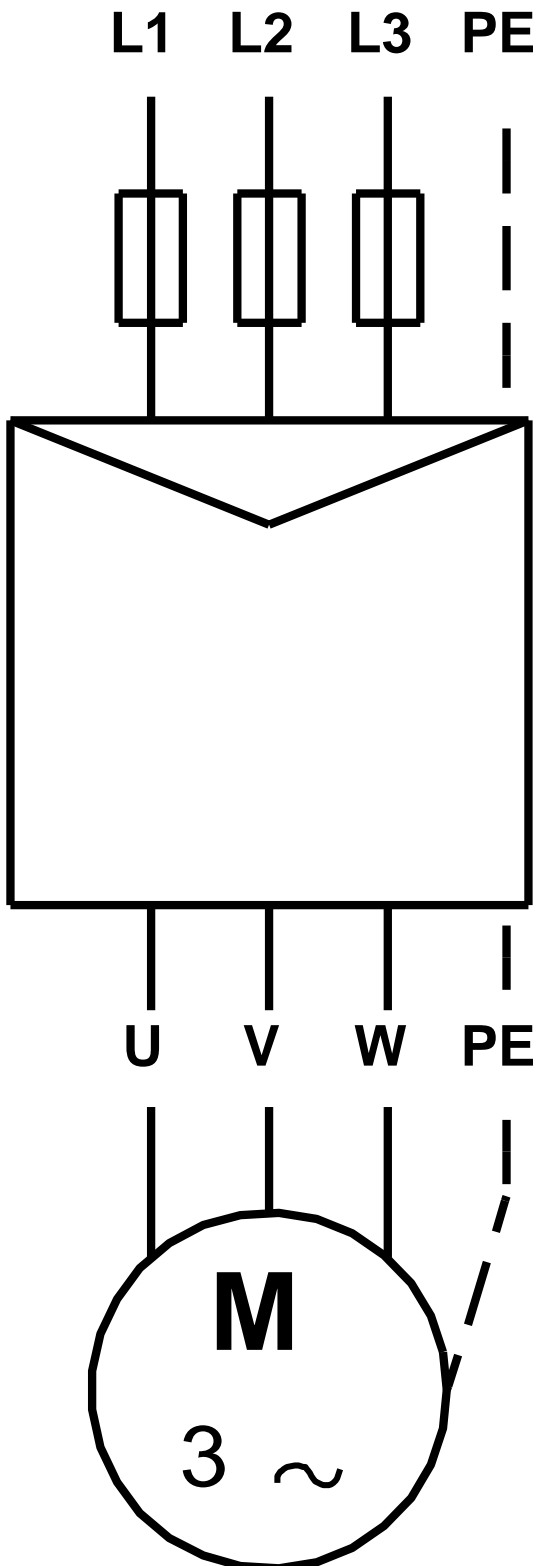

! [ ], .