

1 SP 9-11



: 98699055

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 9 <sup>3</sup>/  
 : 57.5  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: Rp2  
 : 4 inch  
 :  
 : MS402  
 - P2: 2.2  
 ( 2), : 2.2  
 : 50 Hz  
 : 3 x 380-400-415  
 : 5.50-5.50-5.70 A  
 : 440-460-470 %  
 Cos - : 0.85-0.82-0.77  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192007  
 :  
 MEI : 0.70  
 ErP : EuP / .  
 : 22.6  
 : 25.1  
 : 0.021 <sup>3</sup>  
 Danish VVS No.: 388480011  
 Finnish LVI No.: 4762693  
 C : DK  
 : 8413702900

## 98699055 SP 9-11 50

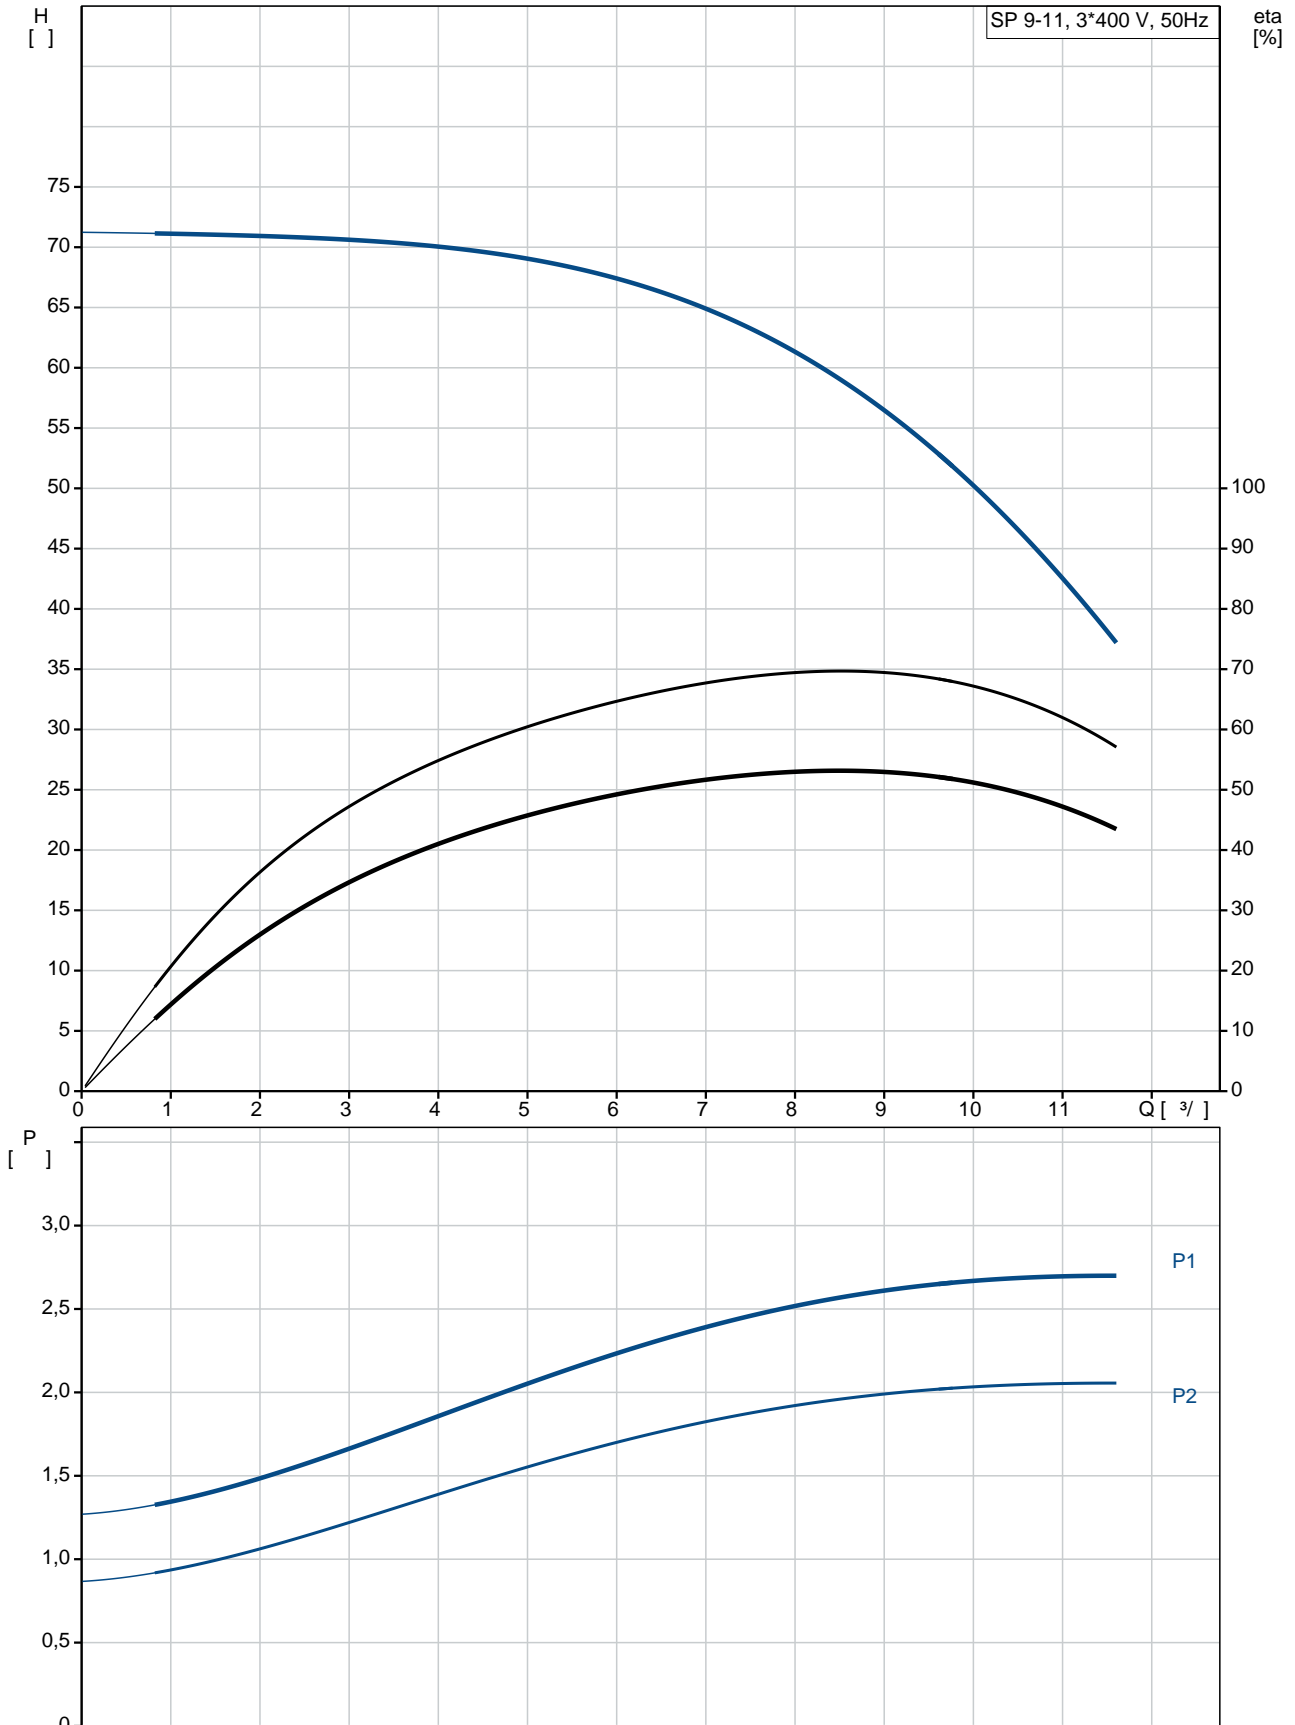

SP 9-11  
 98699055  
 EAN : 5712600105935  
 2900 /  
 9 <sup>3/</sup>  
 57.5  
 11  
 NONE  
 LIPSEAL  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

Rp2  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>

MS402  
 NEMA  
 - P2: 2.2  
 ( 2), 2.2

50 Hz  
 3 x 380-400-415  
 5.50-5.50-5.70 A  
 440-460-470 %  
 Cos - : 0.85-0.82-0.77  
 2850-2860-2870 /


(IEC 34-5): IP68  
 (IEC 85): B

79192007

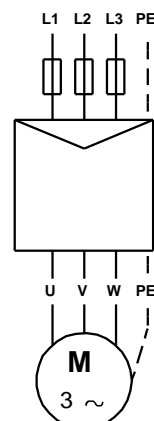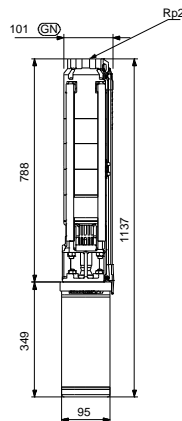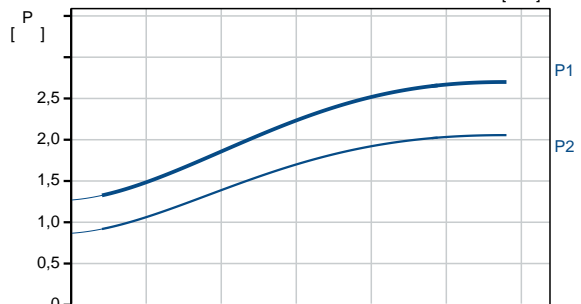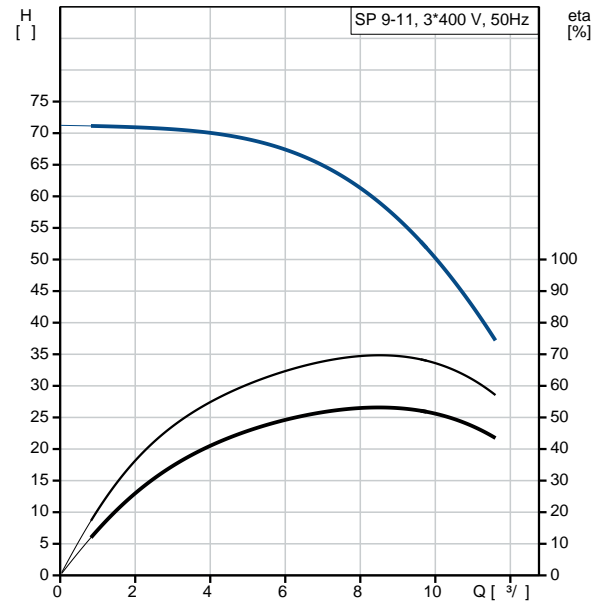


MEI :		0.70
ErP :	EuP	/ .
:		22.6
:		25.1
:		0.021 <sup>3</sup>
Danish VVS No.:		388480011
Finnish LVI No.:		4762693
C :	DK	
:		8413702900

## 98699055 SP 9-11 50

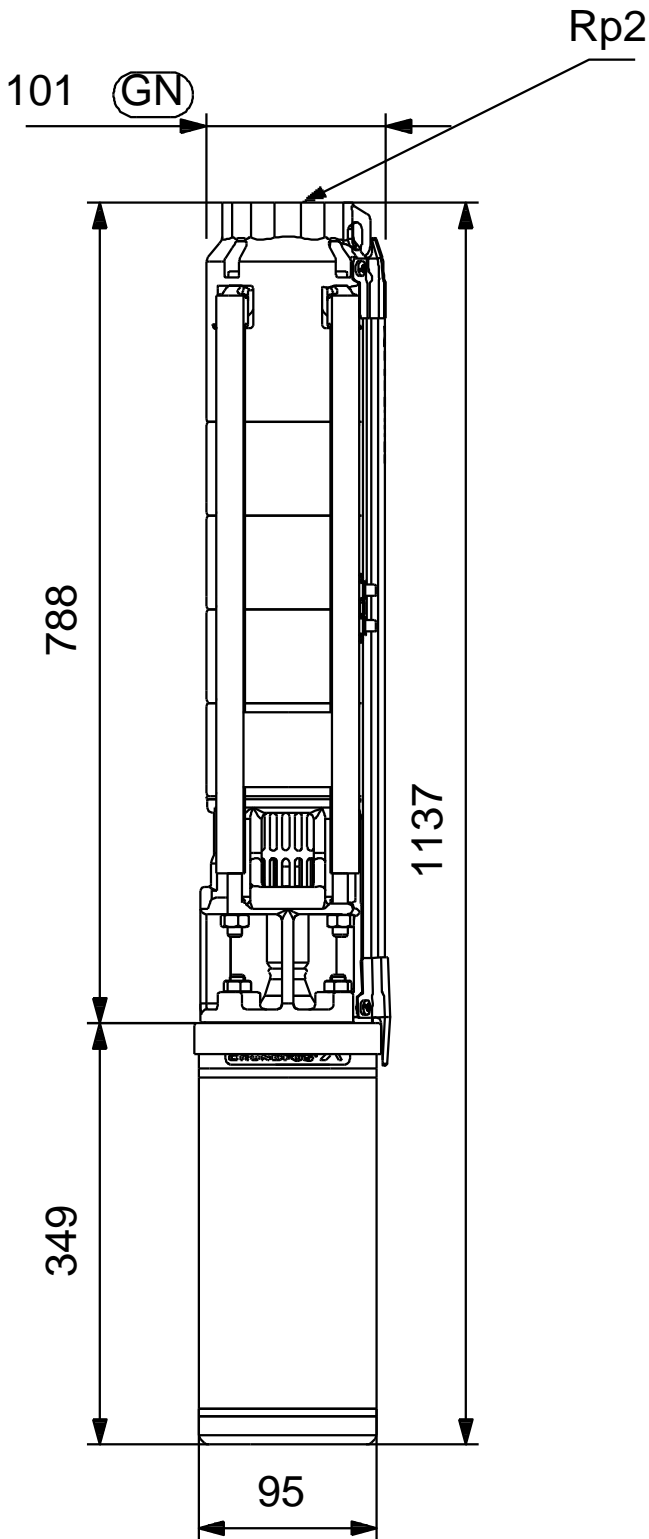

98699055 SP 9-11 50

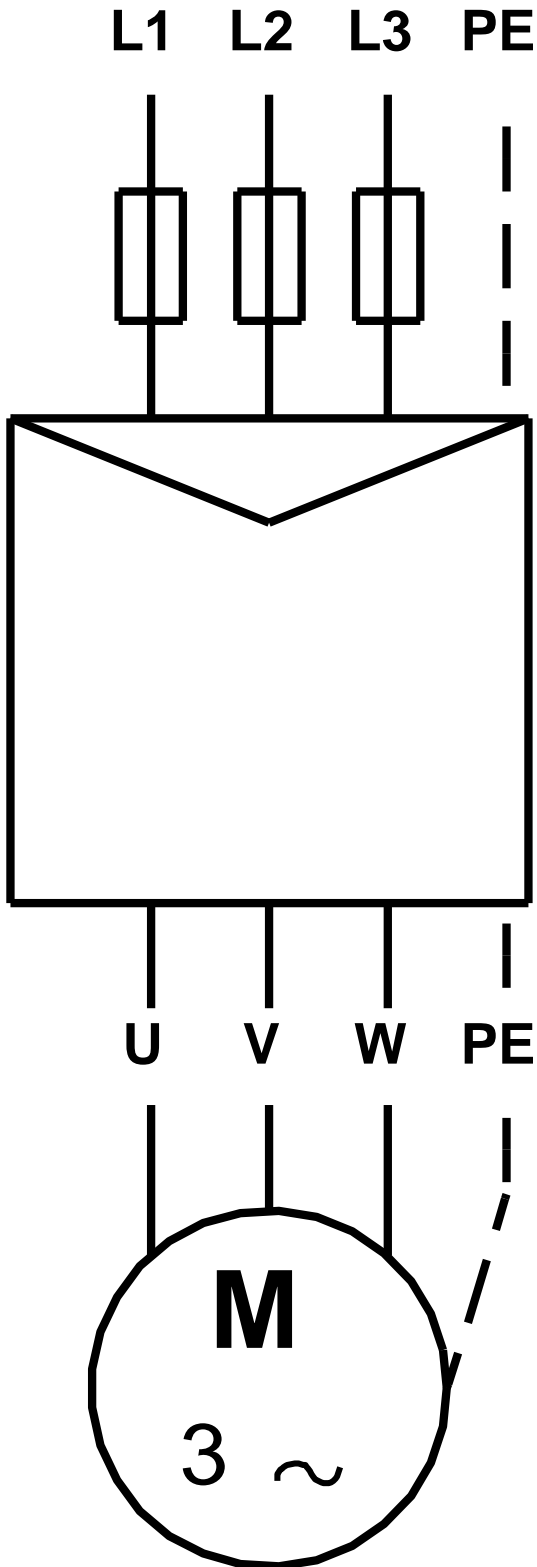

! [ ], .