

1 SP 9-8N



: 98699082

, EN 1.4401 (AISI 316),  
MS40001.5

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 9 <sup>3</sup>/  
 : 41.5  
 : SIC/SIC  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4401  
AISI AISI 316


EN 1.4401  
AISI AISI 316

DIN W.-Nr. 1.4539  
AISI 904 L

Rp2

: 4 inch  
 :  
 : MS4000  
 - P2: 1.5  
 ( 2), : 1.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 3.95-4.00-4.10 A  
 : 410-430-440 %  
 Cos - : 0.84-0.78-0.74  
 : 2840-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79194606  
 :  
 ErP : MEI : 0.70  
 : EuP / .  
 : 22.5  
 : 24.2  
 : 0.016 <sup>3</sup>  
 C : DK  
 : 8413702900

## 98699082 SP 9-8N 50

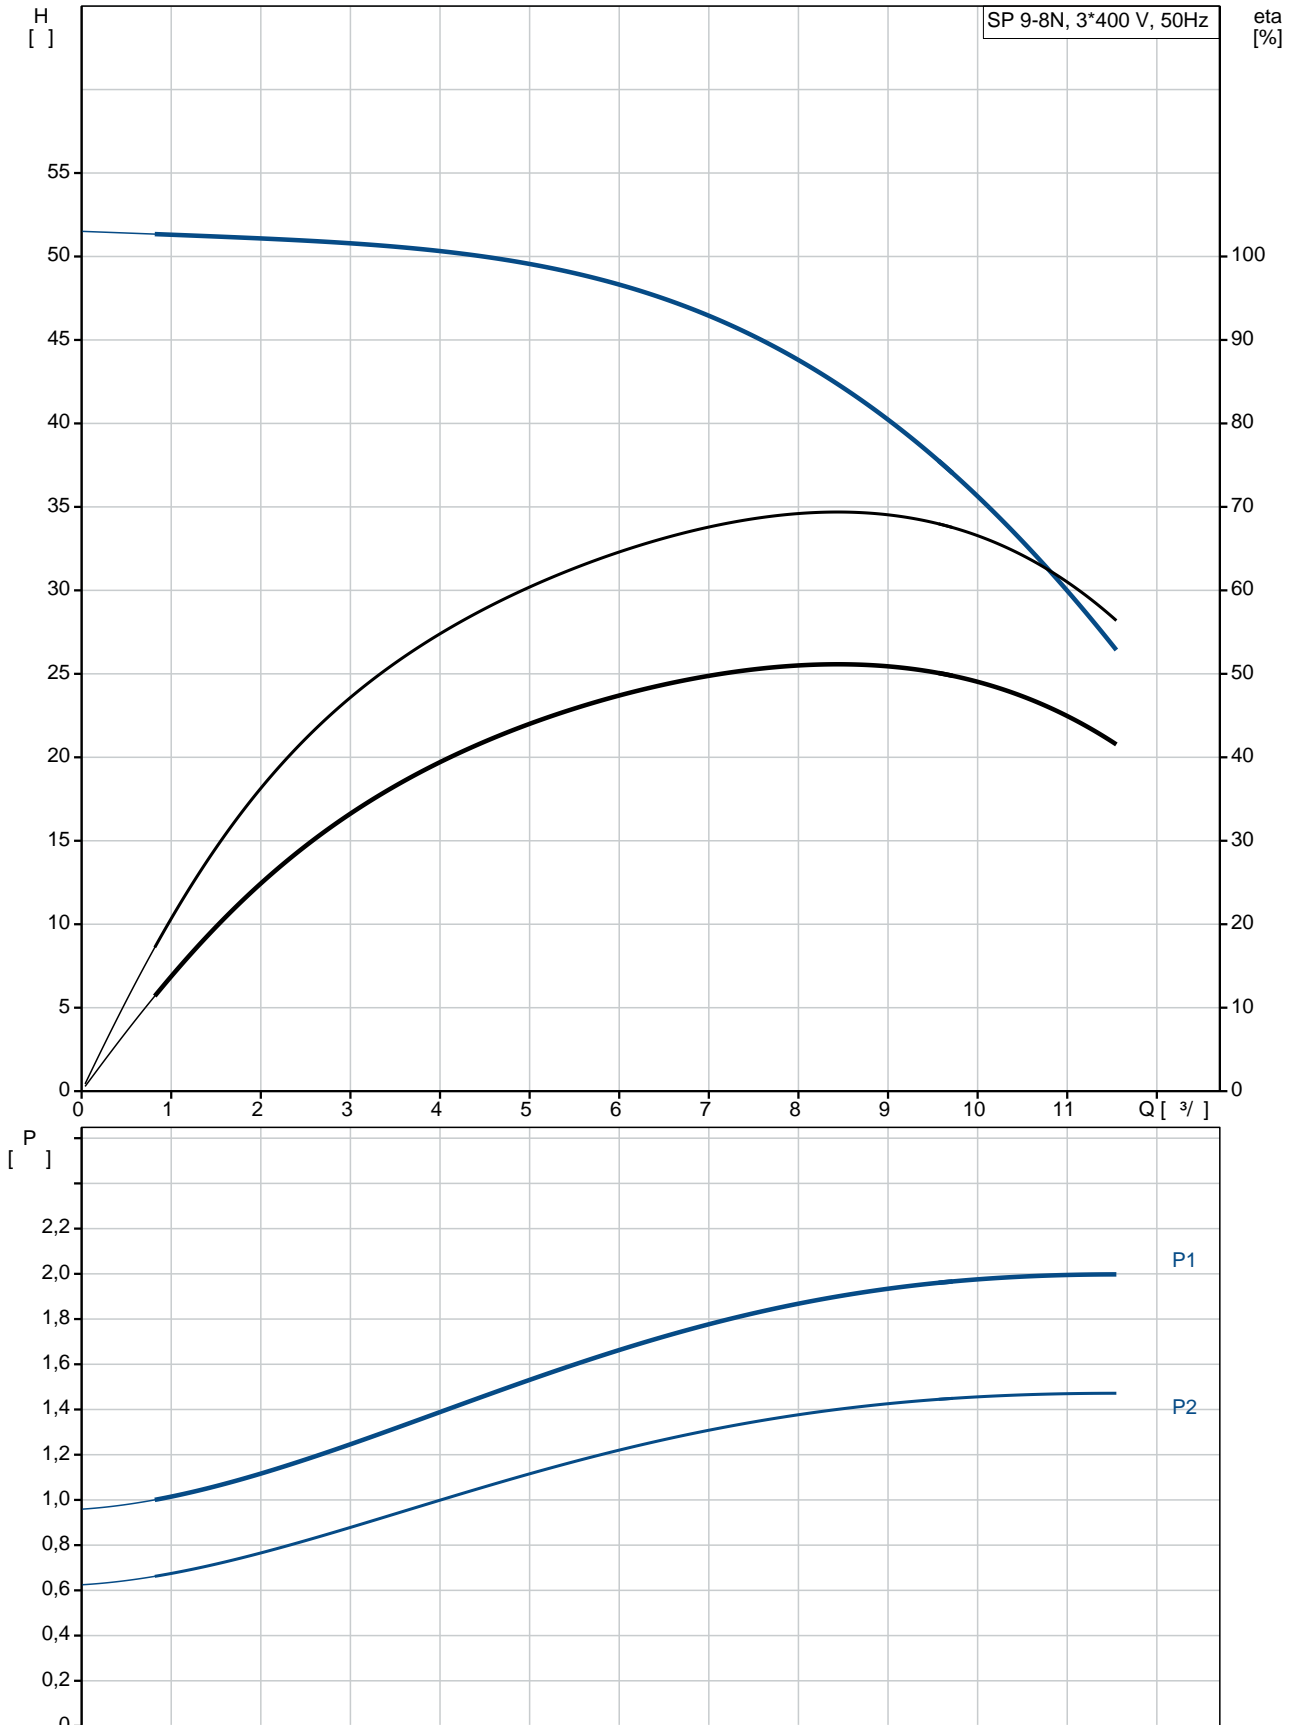

SP 9-8N  
 EAN : 98699082  
 5712600106475

2900 /  
 9 3/  
 41.5  
 8  
 NONE  
 SIC/SIC  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40

EN 1.4401  
 AISI AISI 316  
 EN 1.4401  
 AISI AISI 316  
 DIN W.-Nr. 1.4539  
 AISI 904 L

Rp2  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / 3

MS4000  
 NEMA  
 - P2: 1.5  
 ( 2), 1.5

50 Hz  
 3 x 380-400-415  
 3.95-4.00-4.10 A  
 410-430-440 %  
 Cos - : 0.84-0.78-0.74  
 2840-2860-2870 /


(IEC 34-5): IP68  
 (IEC 85): F

79194606

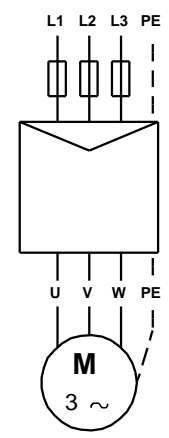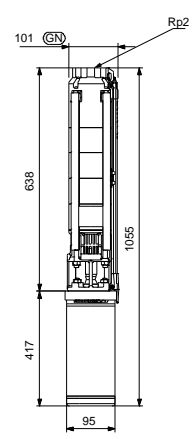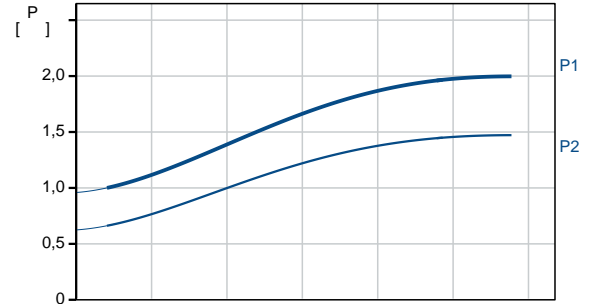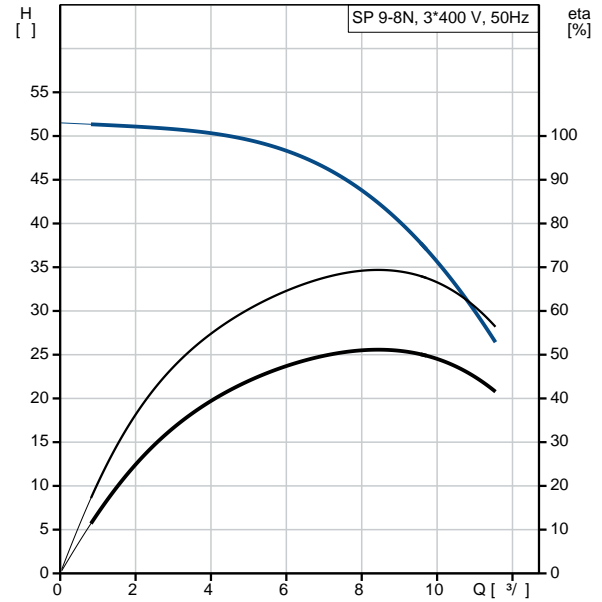


		MEI :	0.70
ErP	:	EuP	/ .
	:	22.5	
	:	24.2	
	:	0.016 <sup>3</sup>	
C	:	DK	
	:	8413702900	

## 98699082 SP 9-8N 50

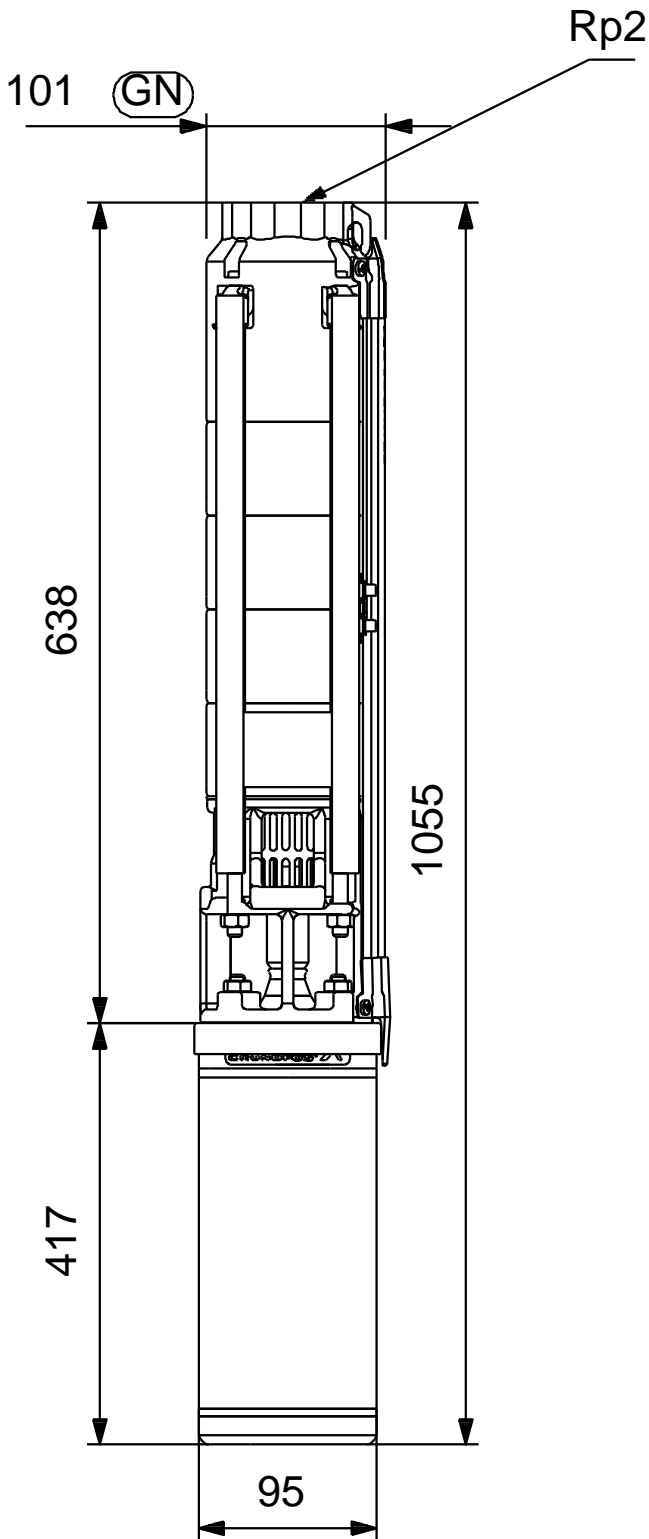

98699082 SP 9-8N 50

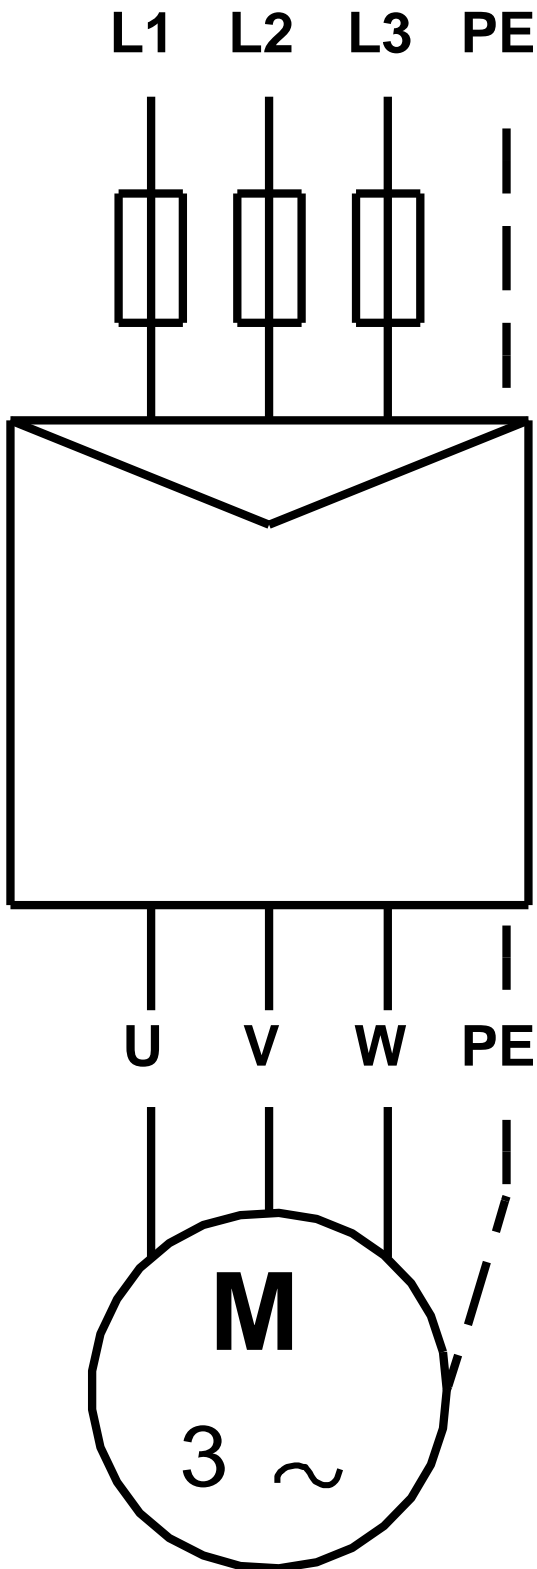

! [ ], .