

1 SP 7-5



: 98699169

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 .t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 7 ³/_l
 : 22.3
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/2
 : 4 inch
 :
 : MS402
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 3 x 380-400-415
 : 2.15-2.30-2.40 A
 : 480-490-480 %
 Cos - : 0.75-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192004
 :
 : MEI : 0.70
 ErP : EuP /
 : 14.9
 : 17
 : 0.016 ³
 Danish VVS No.: 388461005
 Finnish LVI No.: 4762681
 C : DK
 : 8413702900

98699169 SP 7-5 50

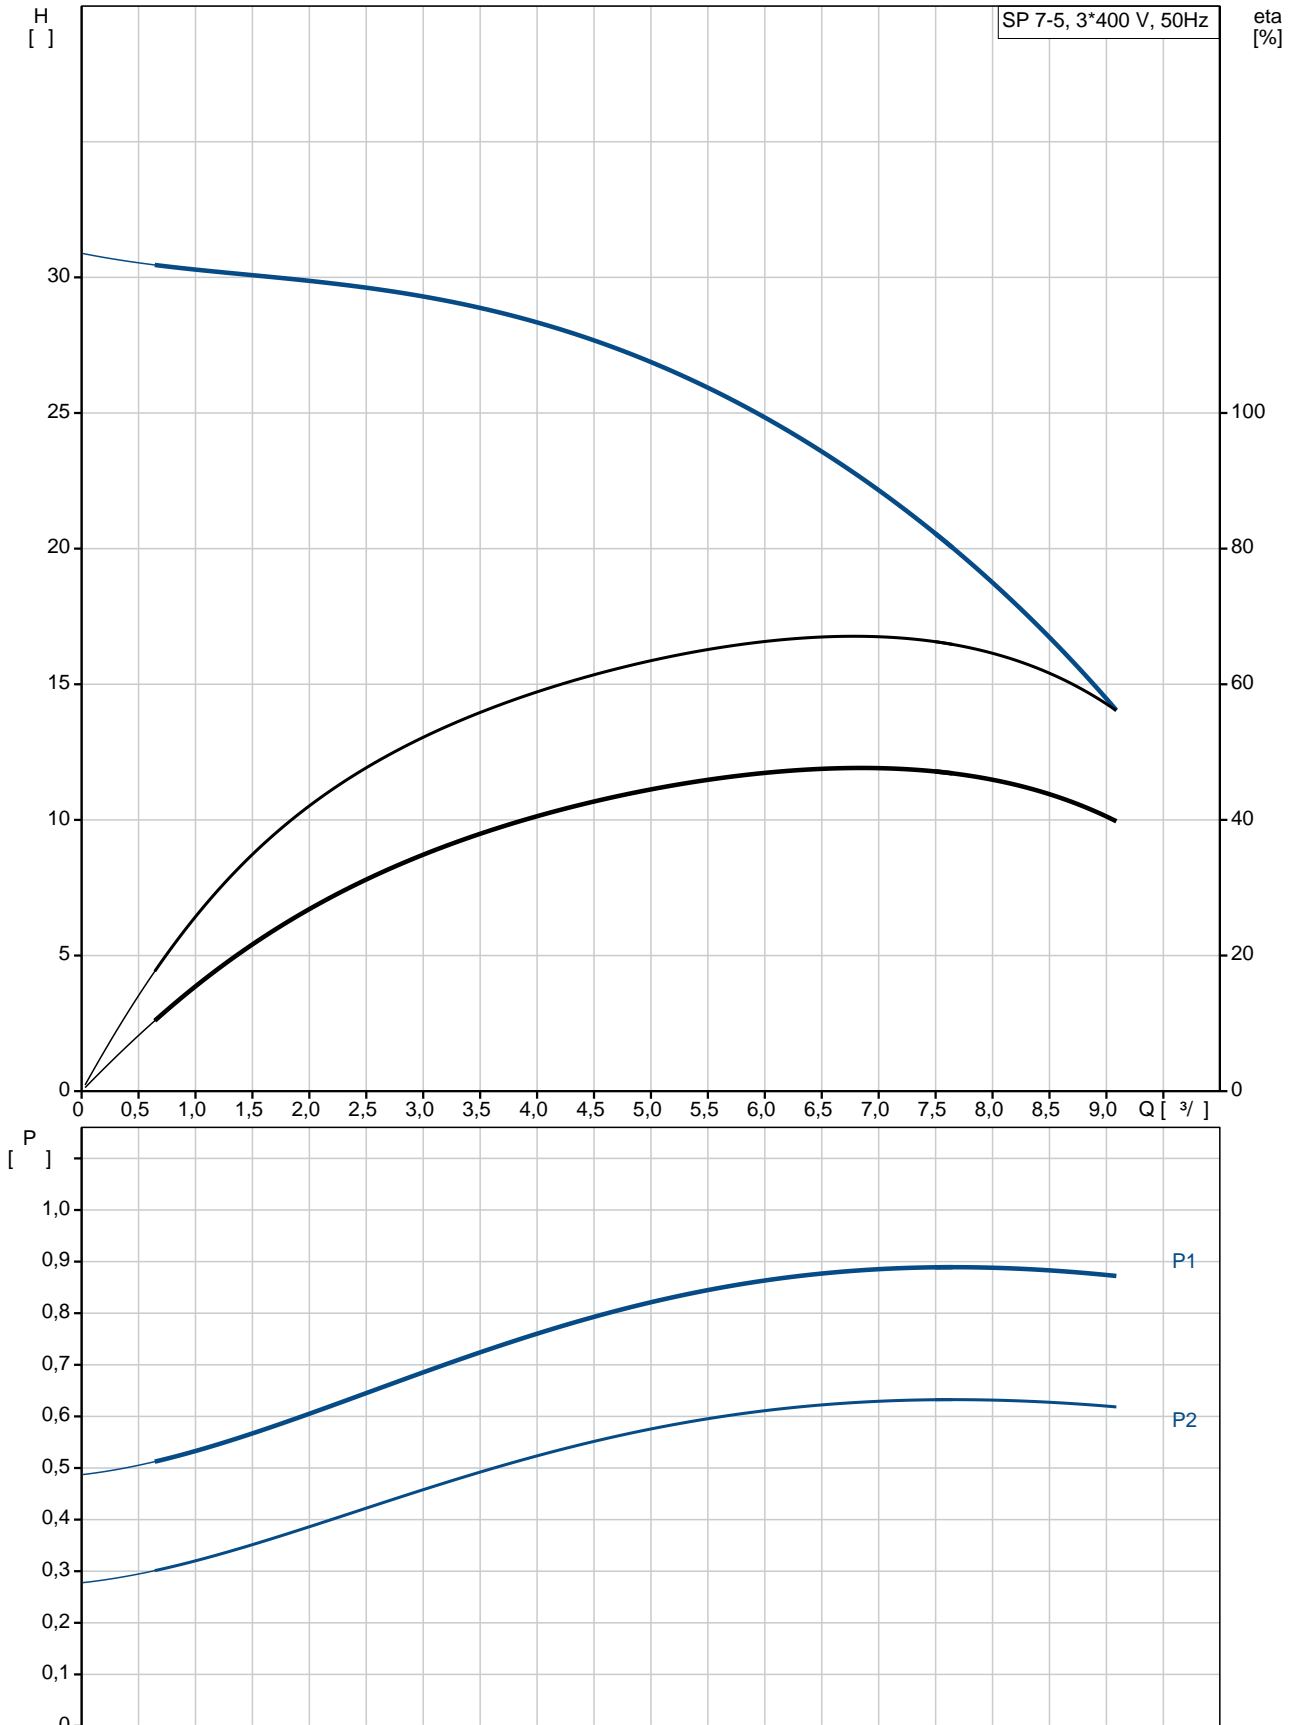

: SP 7-5
 : 98699169
 EAN : 5712600108219
 : 2900 /
 : 7 3/
 : 22.3
 : 5
 : NONE
 : LIPSEAL
 : CE,EAC
 : ISO9906:2012 3B
 : A
 : YES
 : T40

: EN 1.4301
 : AISI AISI 304
 : EN 1.4301
 : AISI AISI 304
 : DIN W.-Nr. 1.4301
 : AISI 304





: Rp1 1/2
 : 4 inch

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / 3
 : MS402
 : NEMA
 - P2: 0.75
 (2), 0.75

: 50 Hz
 : 3 x 380-400-415
 : 2.15-2.30-2.40 A
 : 480-490-480 %
 Cos - : 0.75-0.72-0.65
 : 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192004

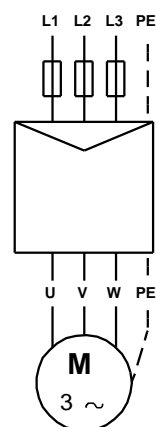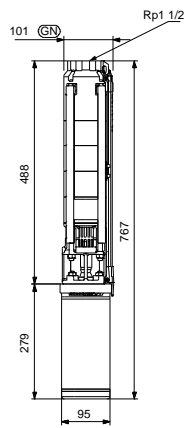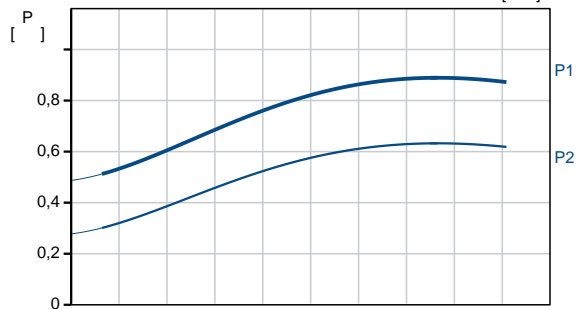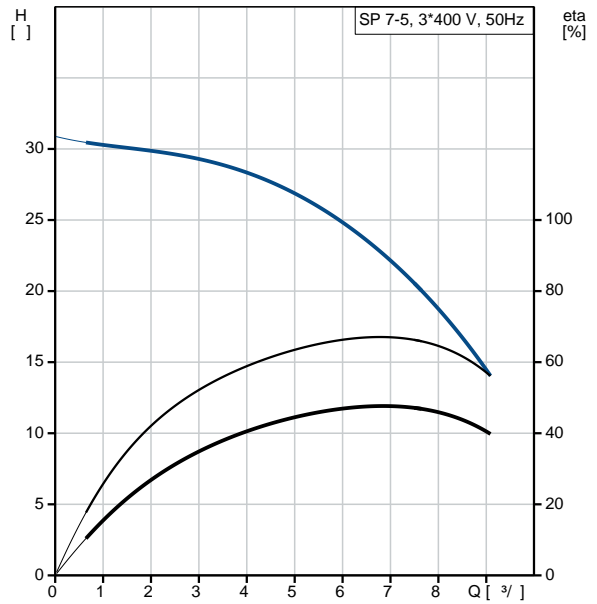


MEI :	0.70
ErP :	EuP / .
:	14.9
:	17
:	0.016 ³
Danish VVS No.:	388461005
Finnish LVI No.:	4762681
C :	DK
:	8413702900

98699169 SP 7-5 50

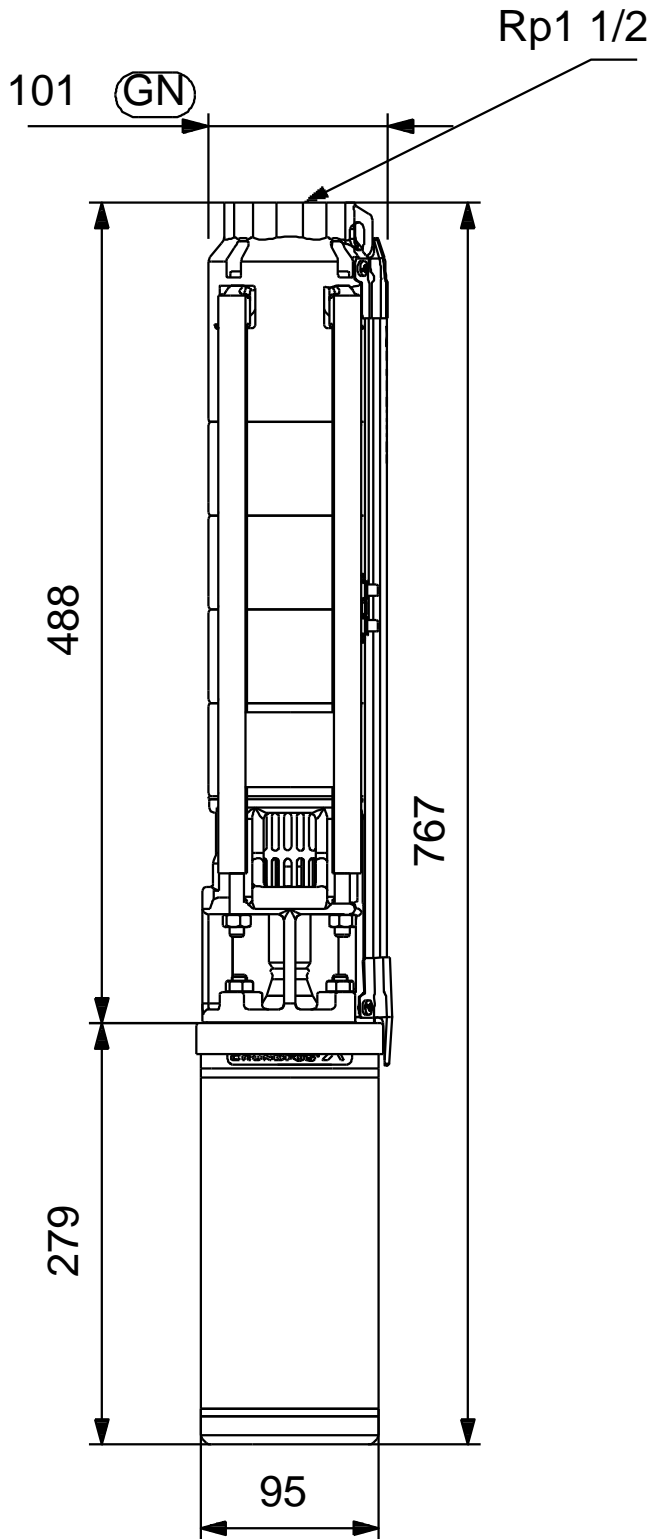

98699169 SP 7-5 50

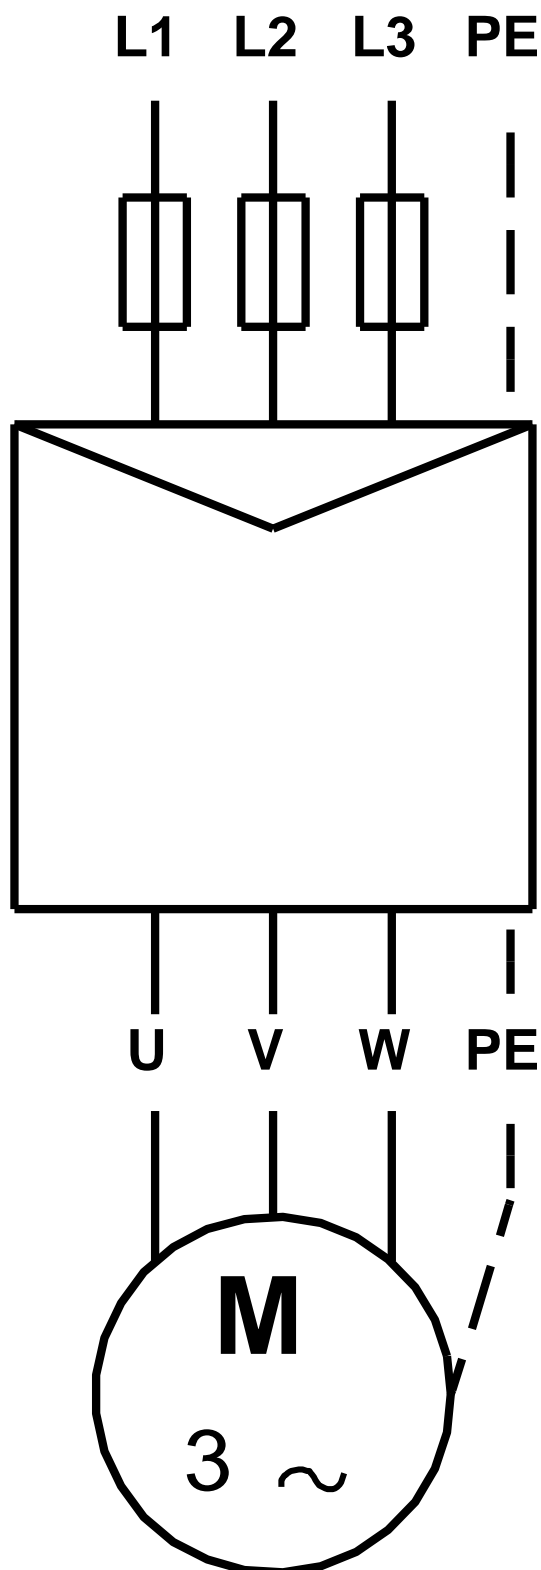

! [], .