

1 SP 7-12



: 98699180

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 7 <sup>3</sup>/<sub>l</sub>  
 : 54.7  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: Rp1 1/2  
 : 4 inch  
 :  
 : MS402  
 - P2: 1.5  
 ( 2), : 1.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 4.10-4.20-4.40 A  
 : 490-500-500 %  
 Cos - : 0.80-0.75-0.70  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192006  
 :  
 : MEI : 0.70  
 ErP : EuP / .  
 : 21.8  
 : 24.3  
 : 0.021 <sup>3</sup>  
 Danish VVS No.: 388461012  
 Finnish LVI No.: 4762683  
 C : DK  
 : 8413702900

## 98699180 SP 7-12 50

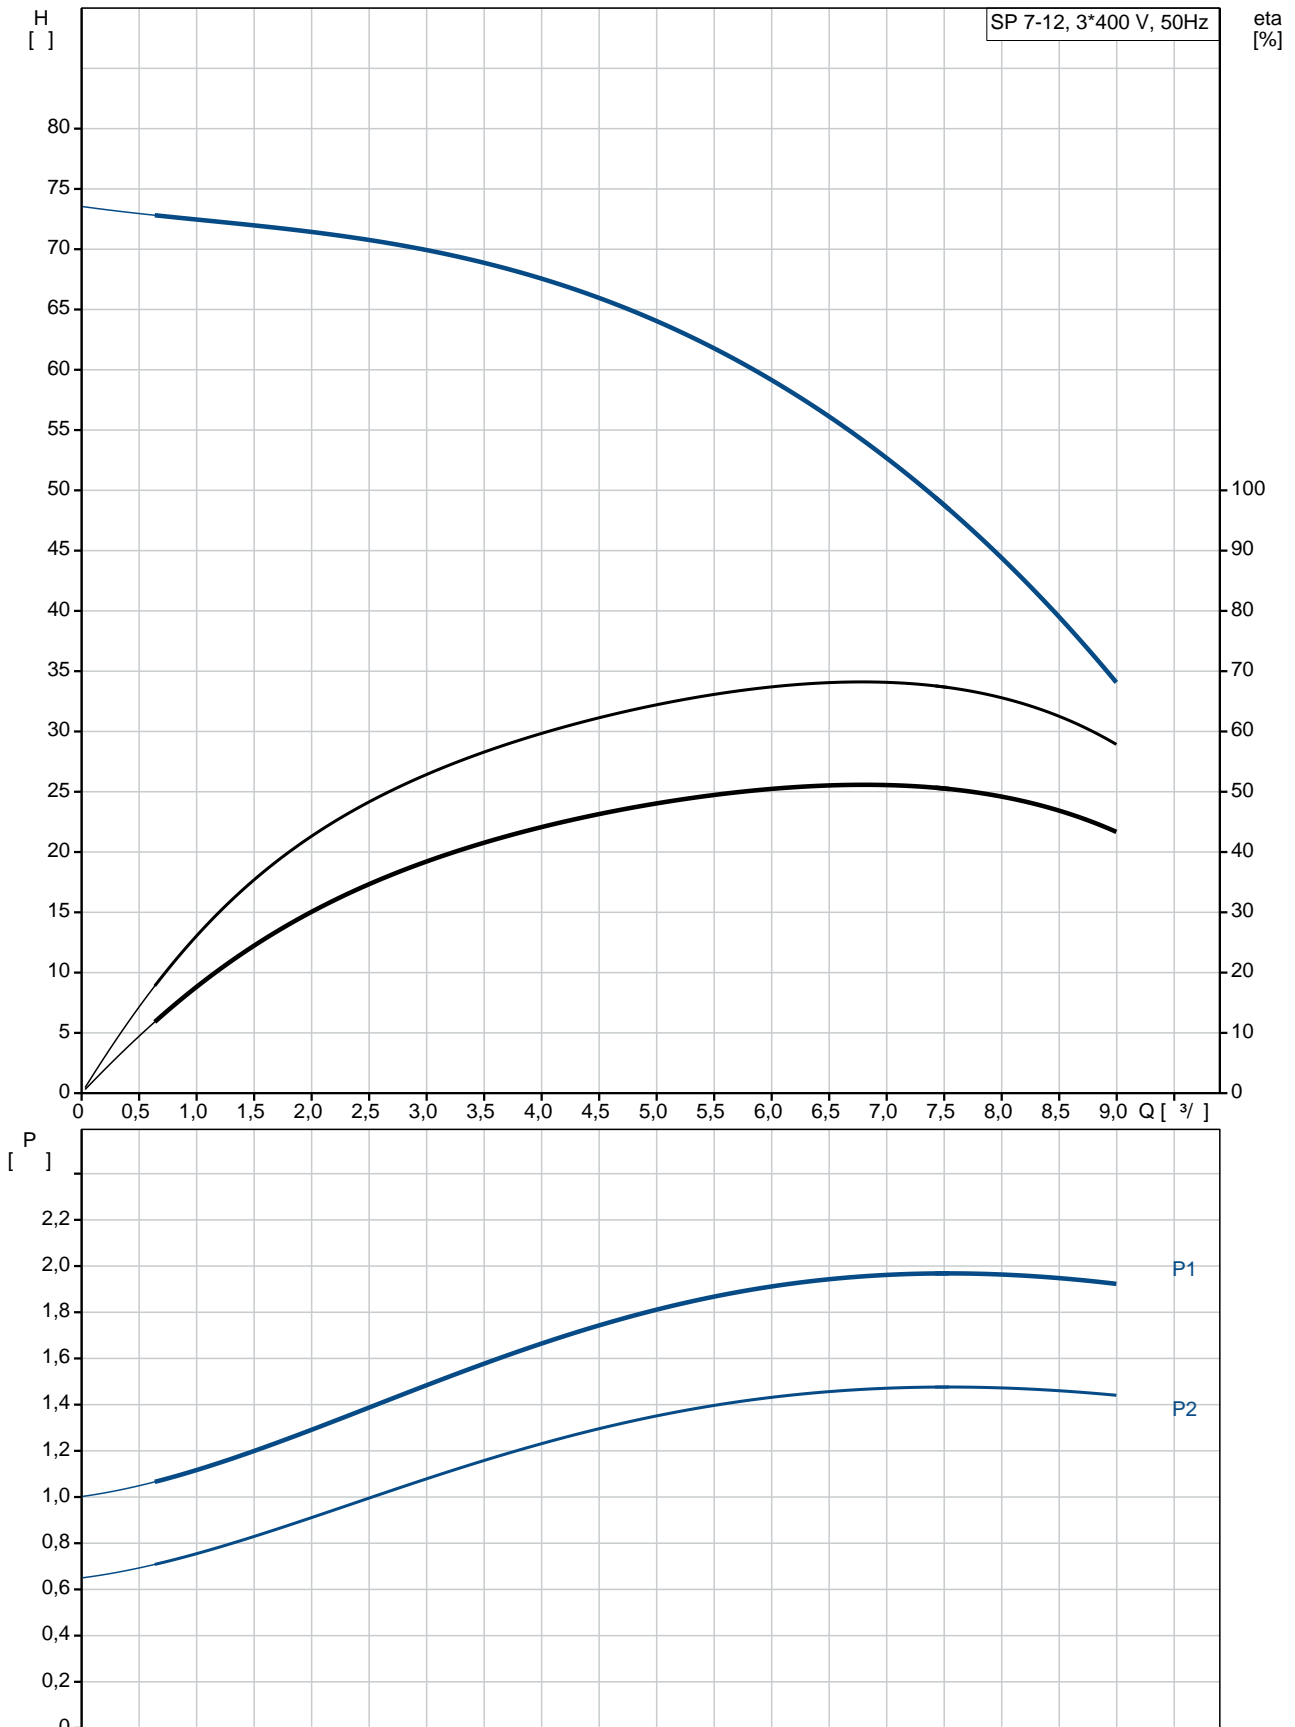

SP 7-12  
 98699180  
 EAN : 5712600108431

2900 /  
 7 3/  
 54.7  
 12  
 NONE  
 LIPSEAL  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

Rp1 1/2  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / 3

MS402  
 NEMA  
 - P2: 1.5  
 ( 2), 1.5

50 Hz  
 3 x 380-400-415  
 4.10-4.20-4.40 A  
 490-500-500 %  
 Cos - : 0.80-0.75-0.70  
 2850-2860-2870 /


(IEC 34-5): IP68  
 (IEC 85): B

79192006

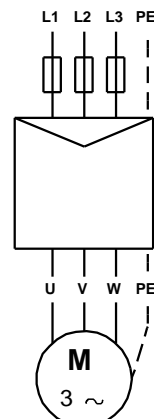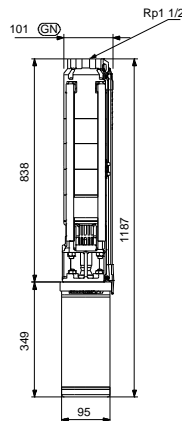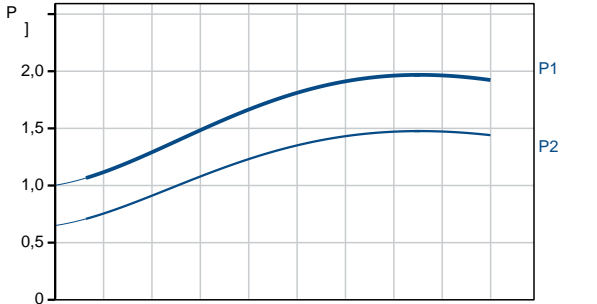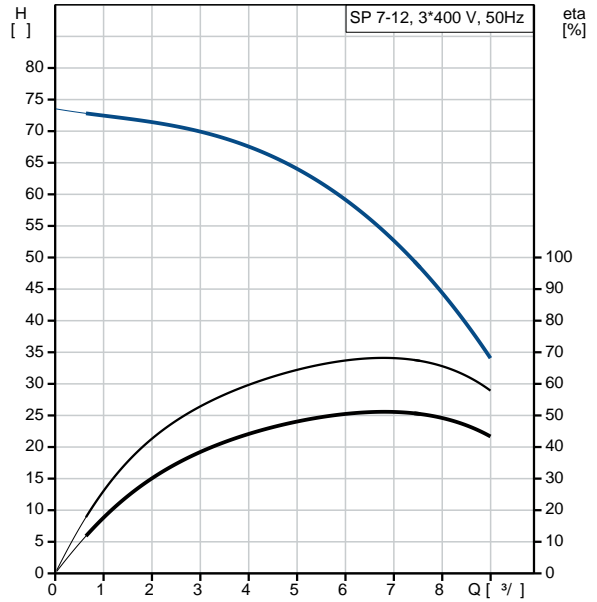


MEI :	0.70
ErP :	EuP / .
:	21.8
:	24.3
:	0.021 <sup>3</sup>
Danish VVS No.:	388461012
Finnish LVI No.:	4762683
C :	DK
:	8413702900

## 98699180 SP 7-12 50

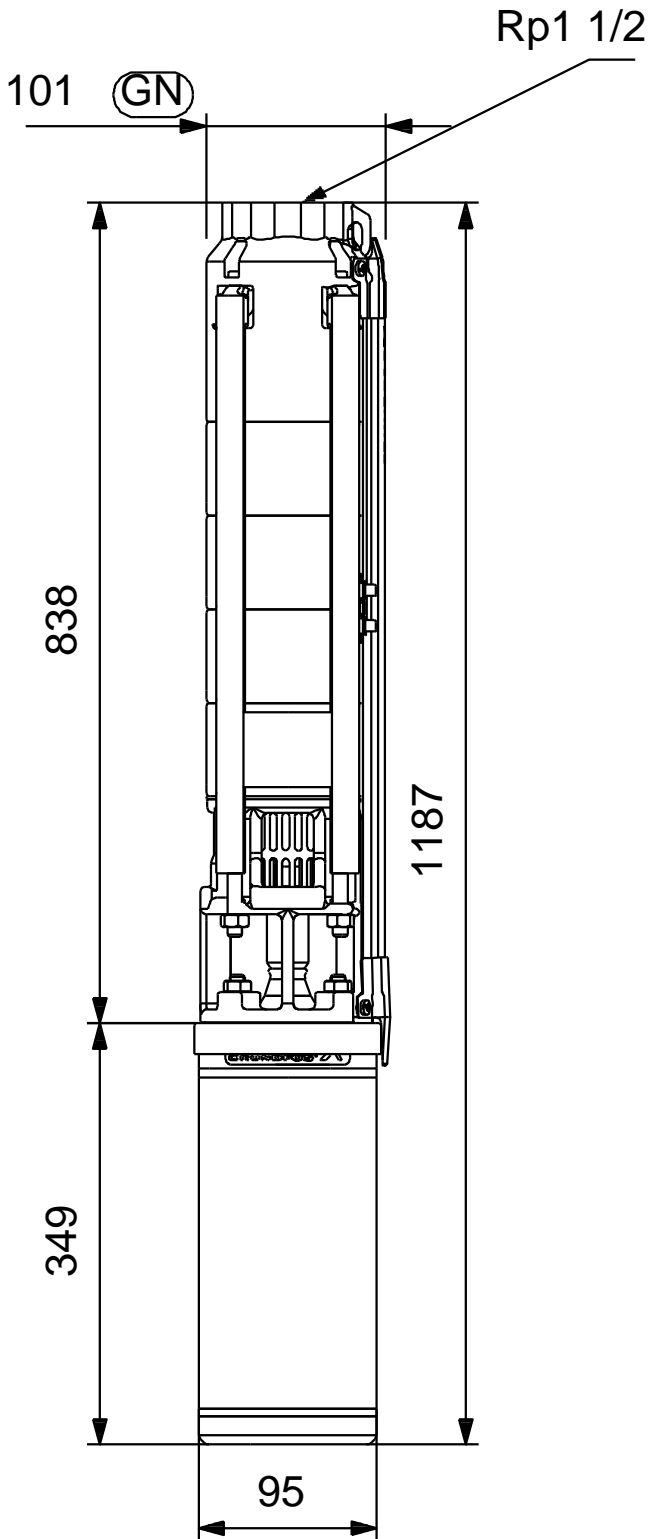

98699180 SP 7-12 50

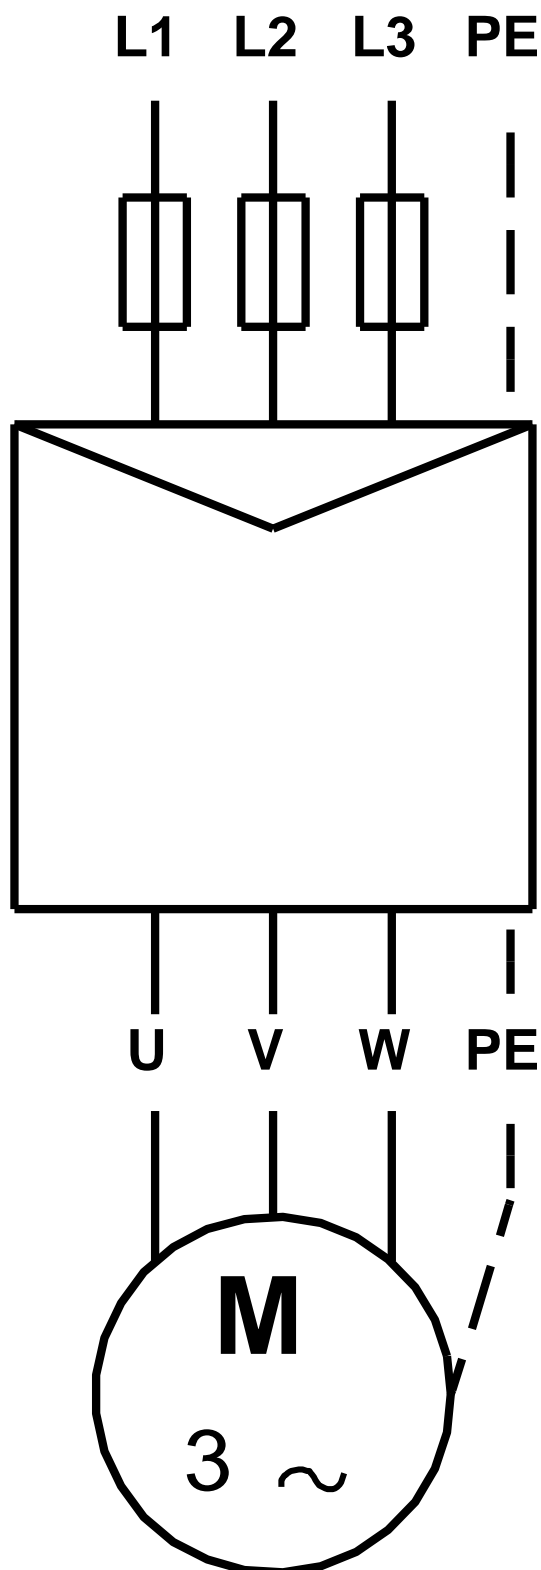

!

[ ],