

1 SP 7-23



: 98699182

, EN 1.4301 (AISI 304),

MS40003

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : : 20 °C
 : 998.2 / ³

: 2900 /

: 7 ³/_l
 : 105.5
 : HM/CER
 : CE,EAC
 - : ISO9906:2012 3B
 : T40


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 3
 (2), : 3
 : 50 Hz
 : 3 x 380-400-415
 : 7.70-7.85-8.10 A
 : 460-490-500 %
 Cos - : 0.82-0.77-0.73
 : 2850-2865-2875 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79194508
 :
 ErP : MEI : 0.70
 : EuP / .
 : 35.3
 : 40.9
 : 0.068 ³
 Finnish LVI No.: 4762685
 C : DK
 : 8413702900

98699182 SP 7-23 50

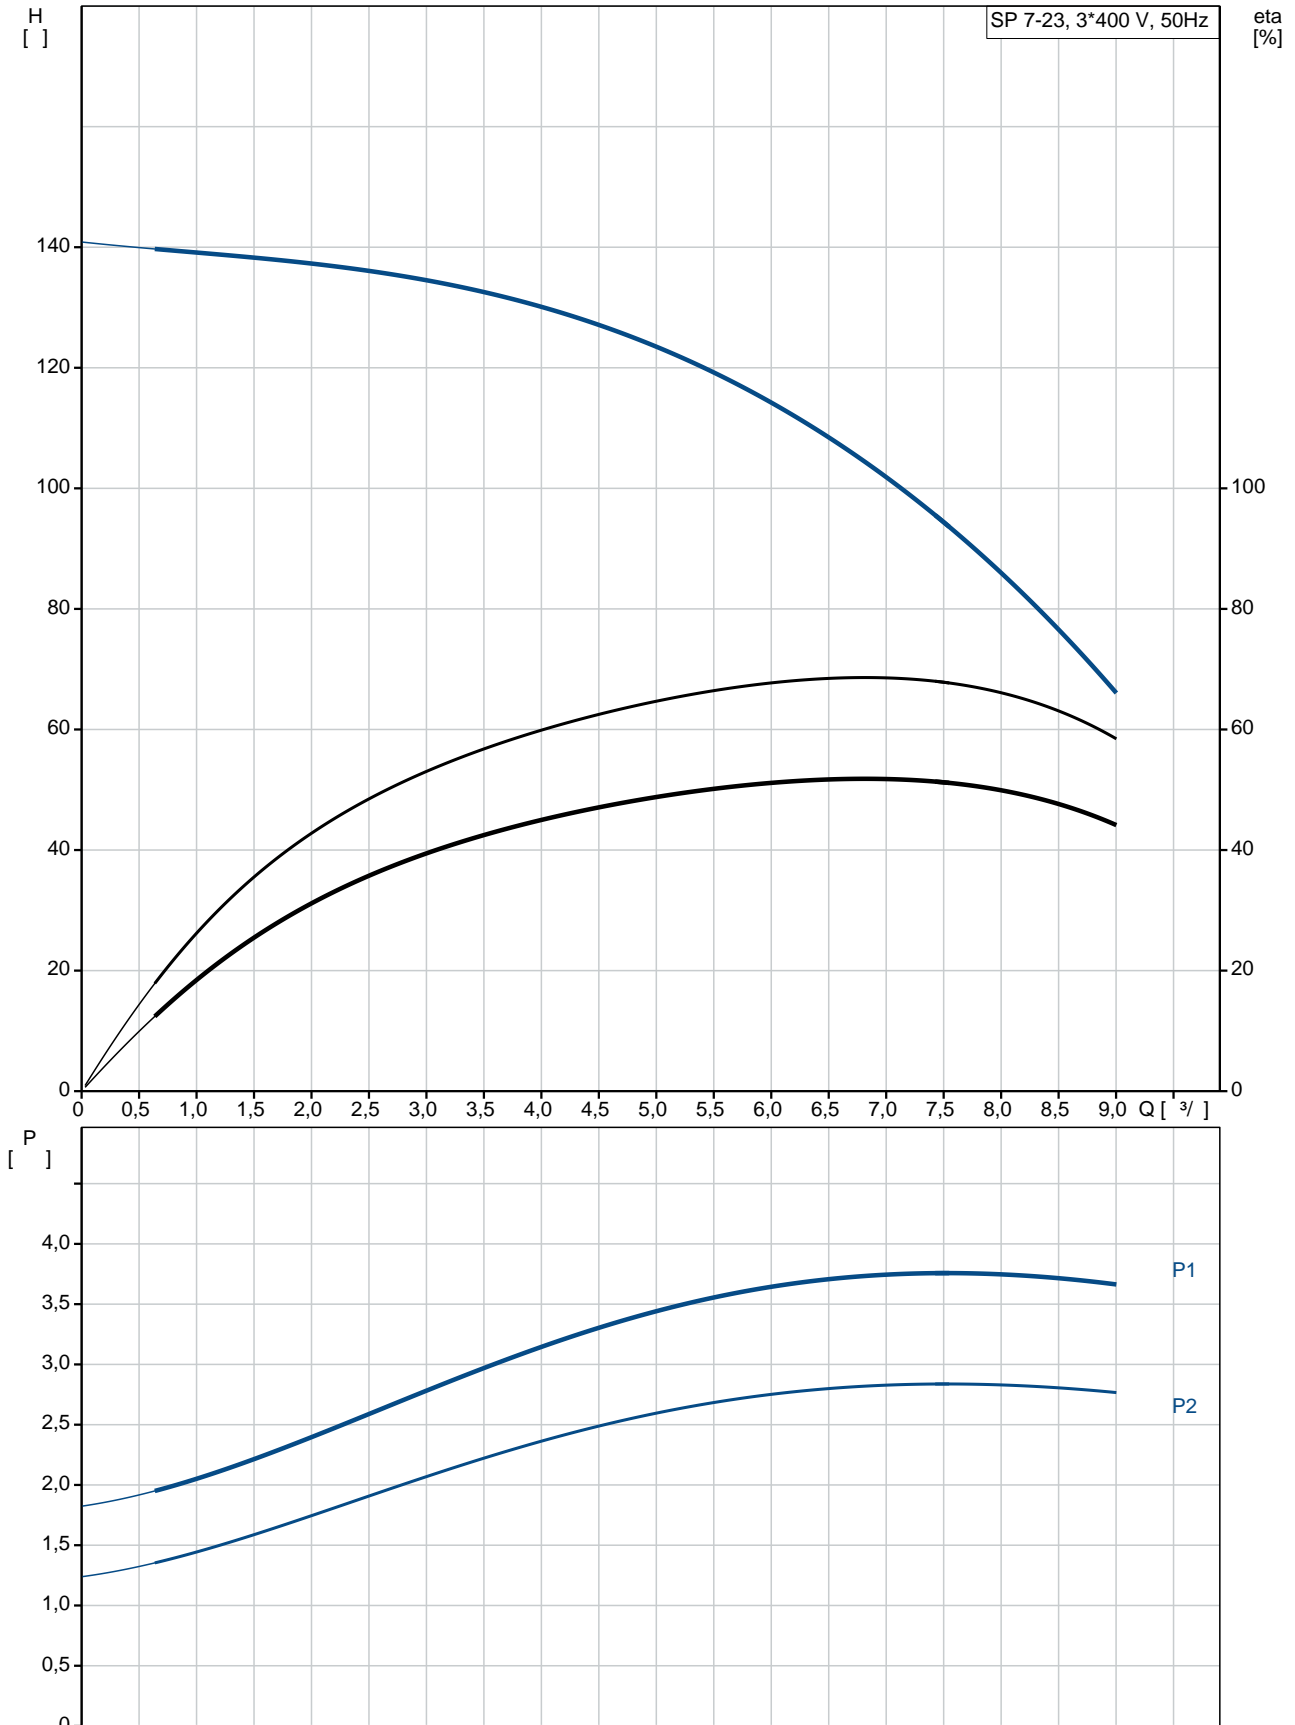

SP 7-23
 EAN : 98699182
 5712600108479

2900 /
 7 3/
 105.5
 23
 NONE
 HM/CER
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/2
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS4000
 NEMA
 - P2: 3
 (2), 3

50 Hz
 3 x 380-400-415
 7.70-7.85-8.10 A
 460-490-500 %
 Cos - : 0.82-0.77-0.73
 2850-2865-2875 /


(IEC 34-5): IP68
 (IEC 85): F

79194508

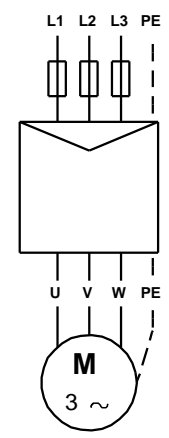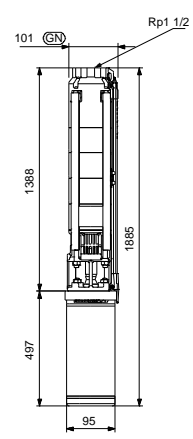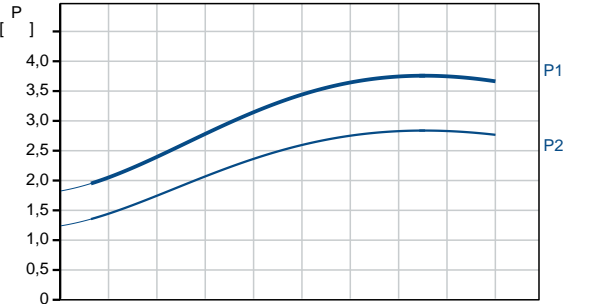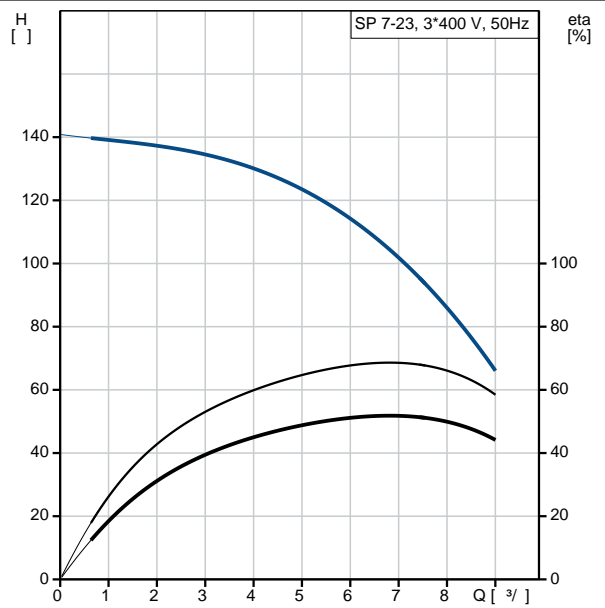


		MEI :	0.70
ErP	:	EuP	/ .
	:	35.3	
	:	40.9	
	:	0.068	³
Finnish LVI No.:		4762685	
C	:	DK	
	:	8413702900	

98699182 SP 7-23 50

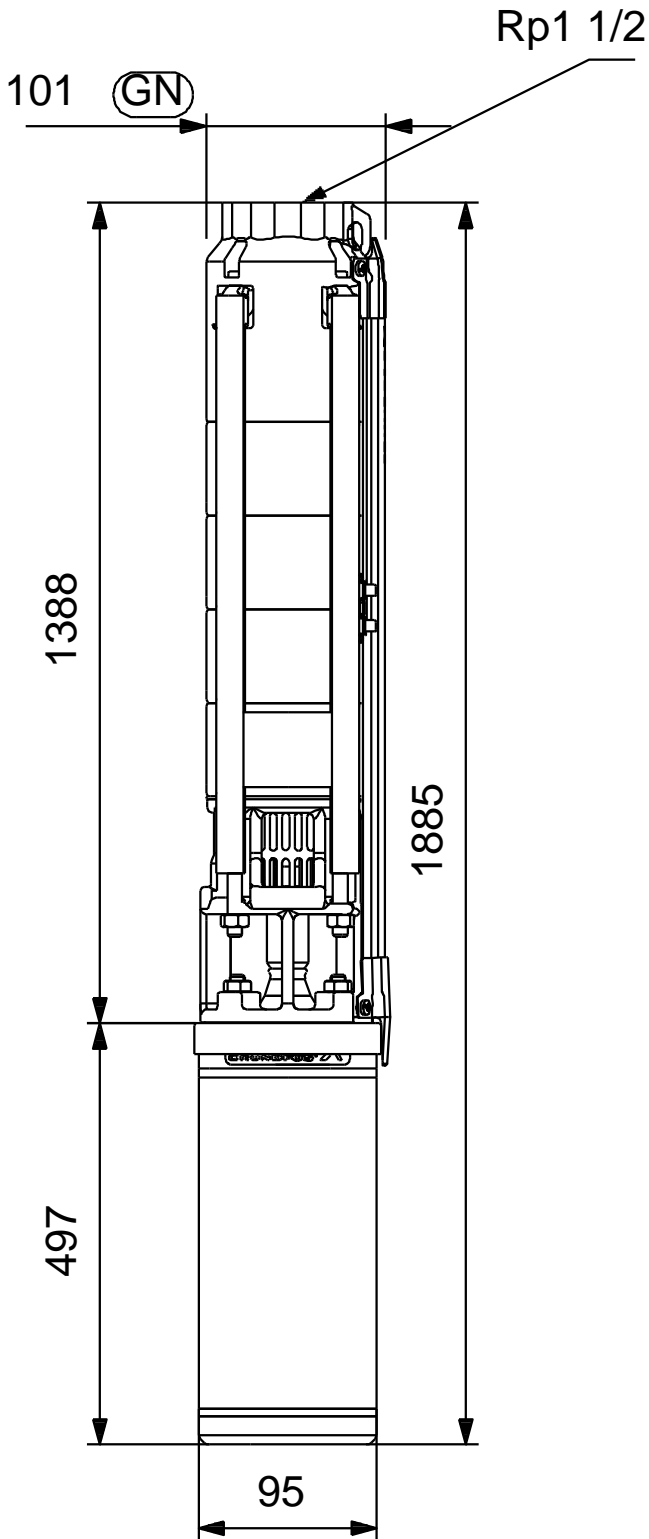

98699182 SP 7-23 50

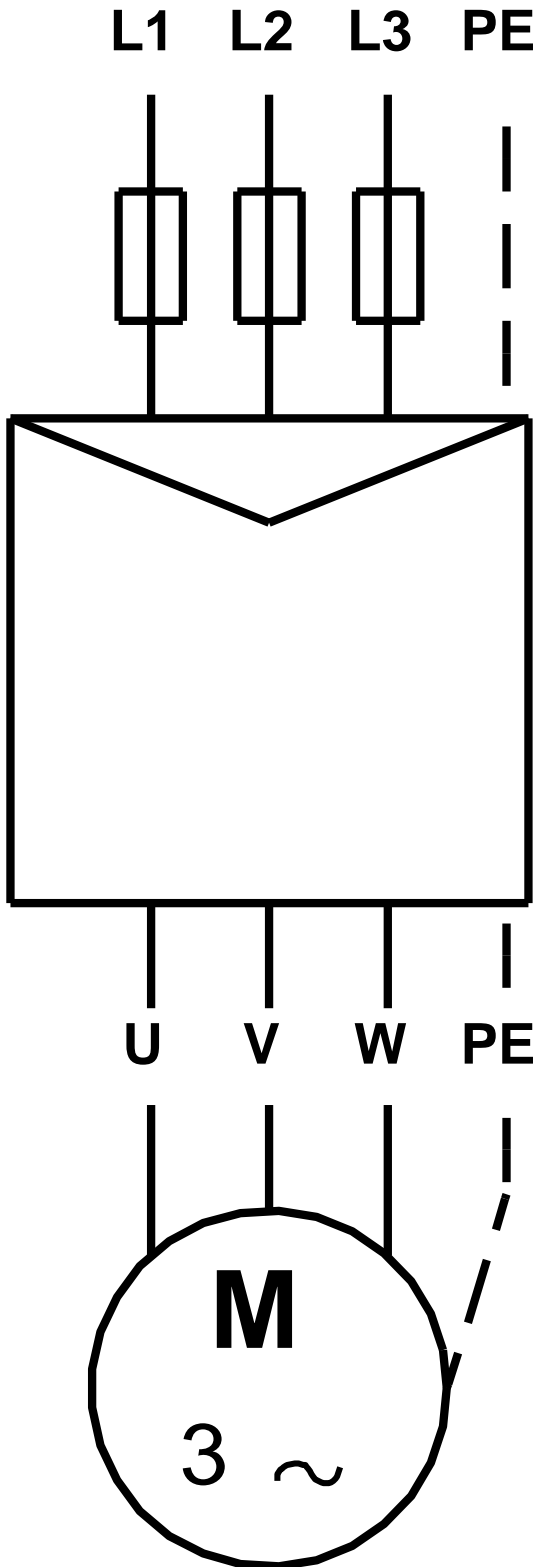

!

[],