

1 SP 7-5



: 98699186

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 .t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 7 ³/_l
 : 22.3
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/2
 : 4 inch
 :
 : MS402
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 3 x 380-400-415
 : 2.15-2.30-2.40 A
 : 480-490-480 %
 Cos - : 0.75-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192004
 :
 : MEI : 0.70
 ErP : EuP /
 : 14.2
 : 16.3
 : 0.016 ³

98699186 SP 7-5 50

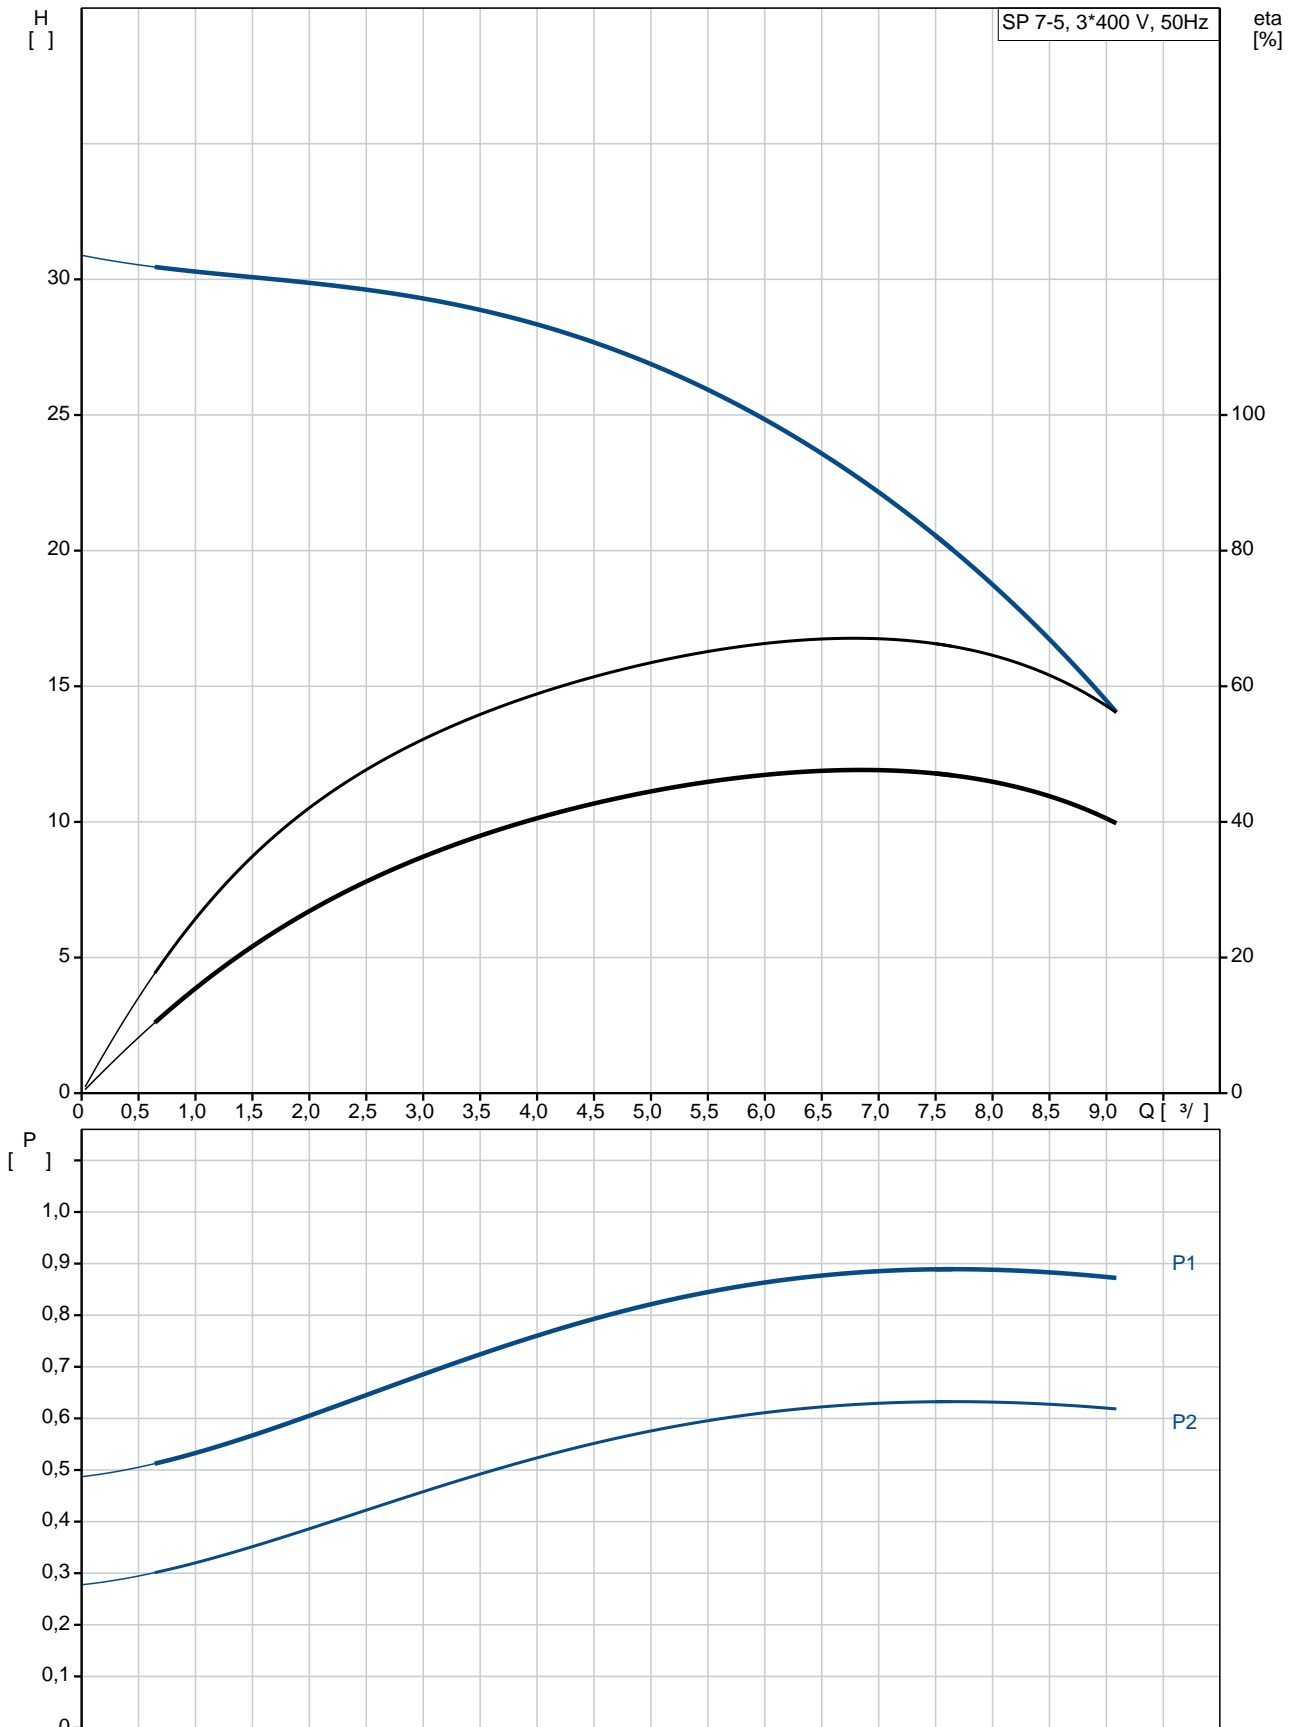

SP 7-5
 EAN : 98699186
 5712600108554

2900 /
 7 3/
 22.3
 5
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/2
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 NEMA
 - P2: 0.75
 (2), 0.75

50 Hz
 3 x 380-400-415
 2.15-2.30-2.40 A
 480-490-480 %
 Cos - : 0.75-0.72-0.65
 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192004

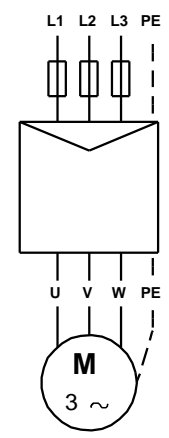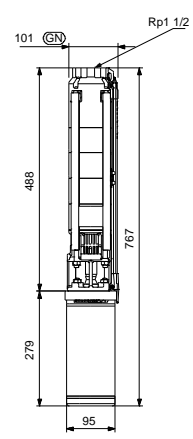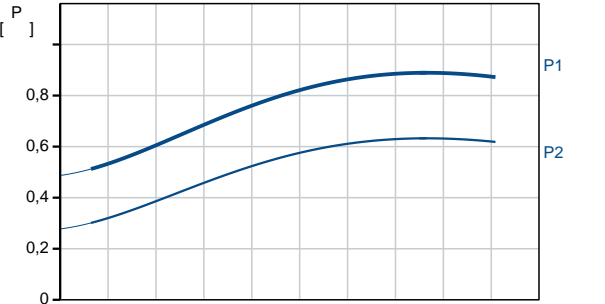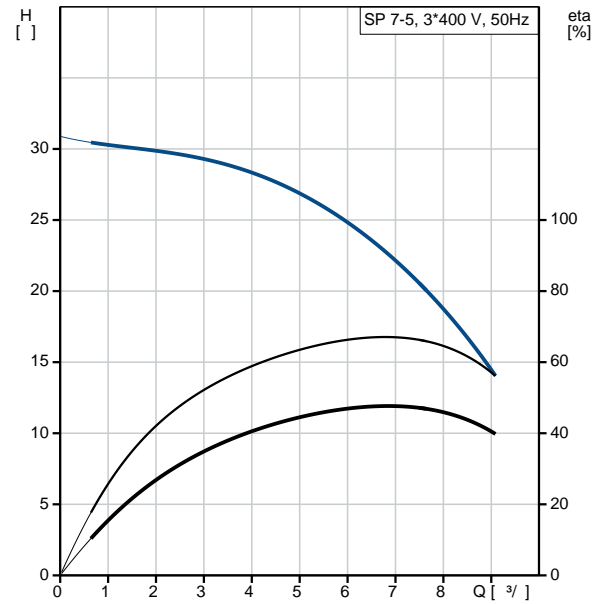


MEI :		0.70
ErP :	EuP	/ .
:		14.2
:		16.3
:		0.016 ³

98699186 SP 7-5 50

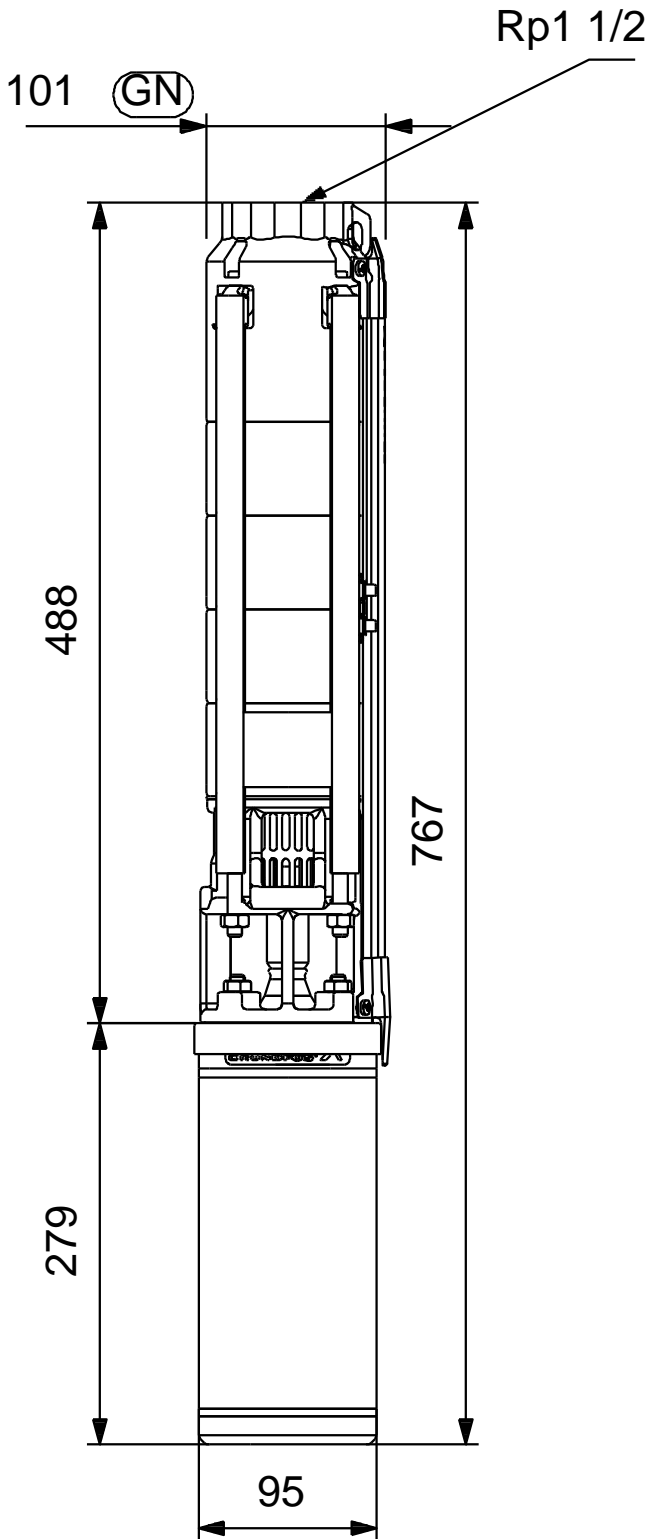

98699186 SP 7-5 50

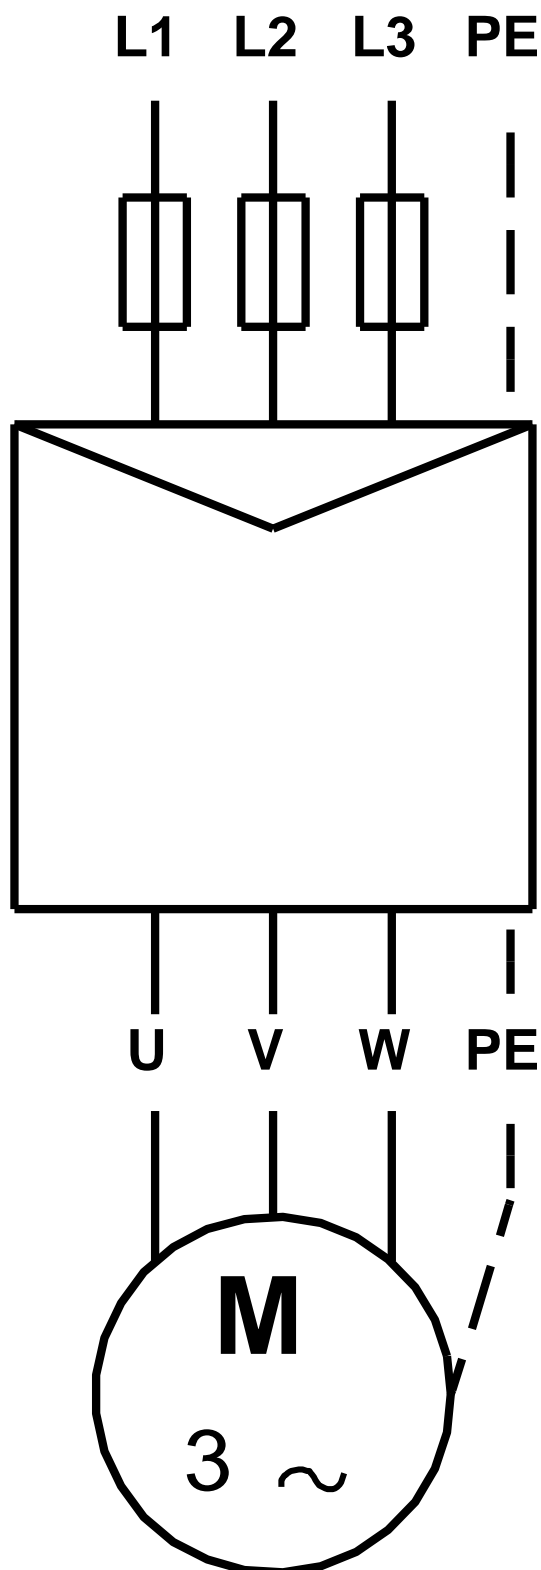

!

[],