

1 SP 7-17



: 98699189

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 7 ³/_l
 : 77.8
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40



EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/2
 : 4 inch
 :
 : MS402
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.50-5.50-5.70 A
 : 440-460-470 %
 Cos - : 0.85-0.82-0.77
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192007
 :
 ErP : MEI : 0.70
 : EuP / .
 : 25.4
 : 27.9
 : 0.021 ³

98699189 SP 7-17 50

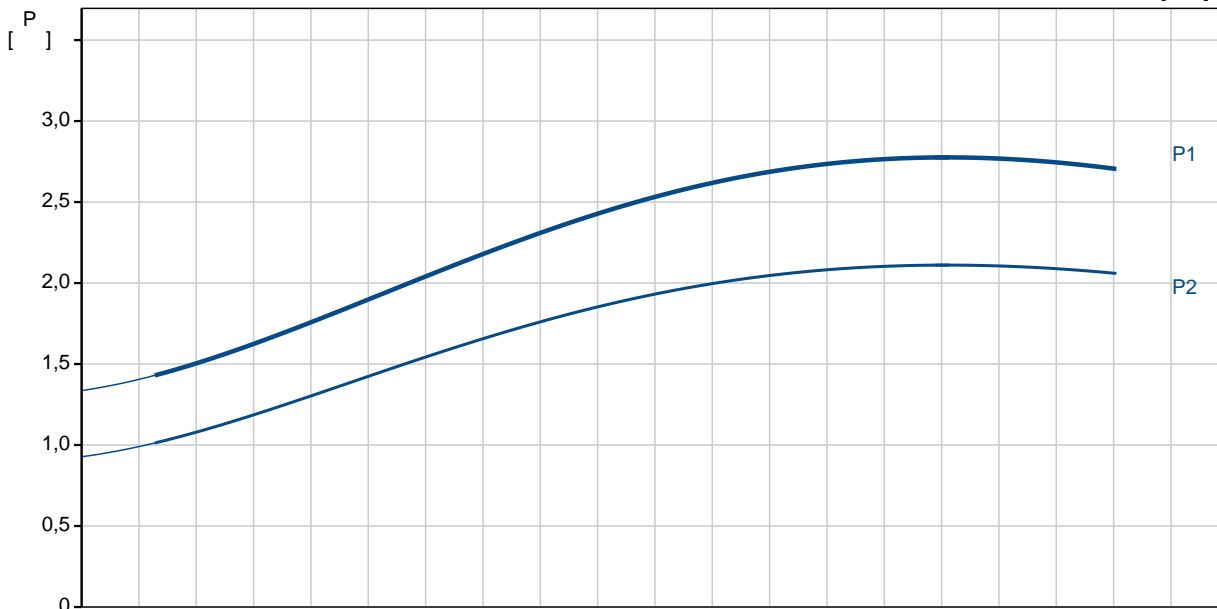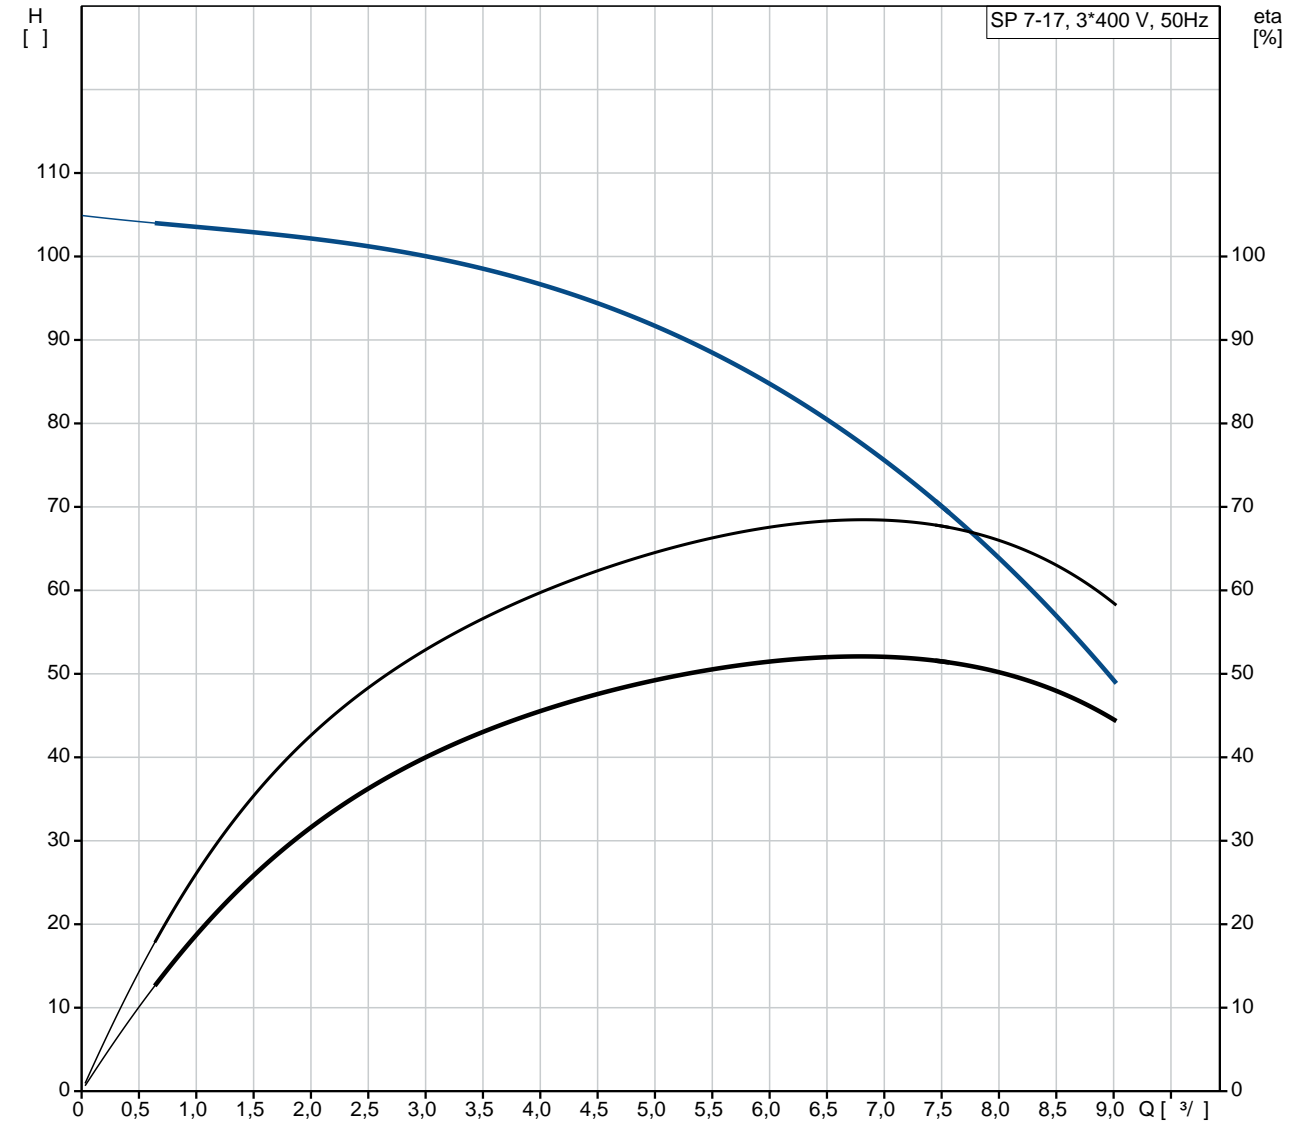

SP 7-17
 EAN : 98699189
 5712600108615
 2900 /
 7 3/
 77.8
 17
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/2
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 NEMA
 - P2: 2.2
 (2), 2.2

50 Hz
 3 x 380-400-415
 5.50-5.50-5.70 A
 440-460-470 %
 Cos - : 0.85-0.82-0.77
 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192007

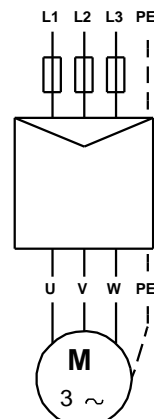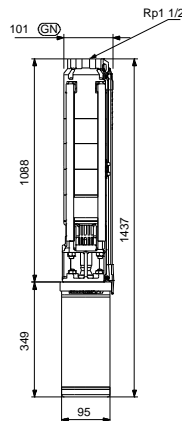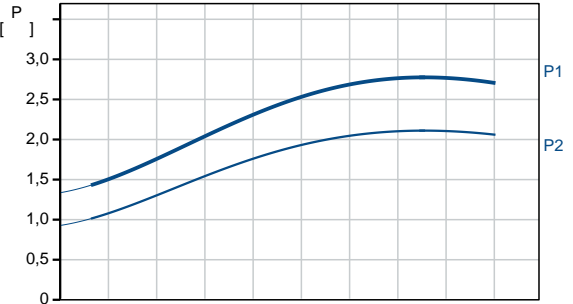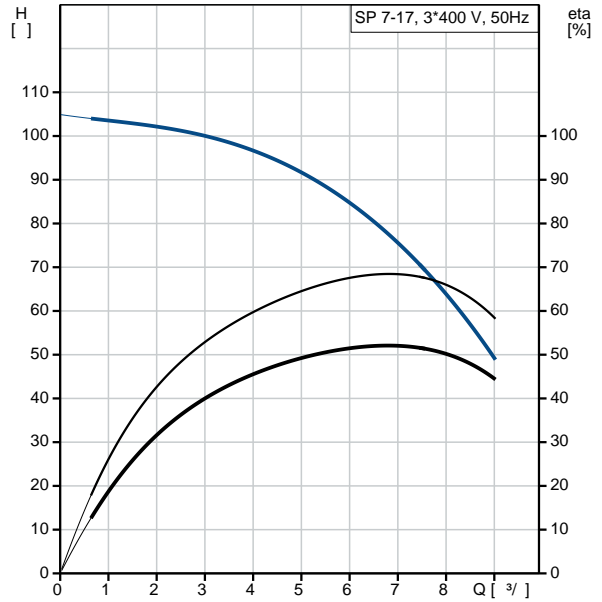

MEI :		0.70
ErP :	EuP	/ .
:		25.4
:		27.9
:		0.021 ³

98699189 SP 7-17 50

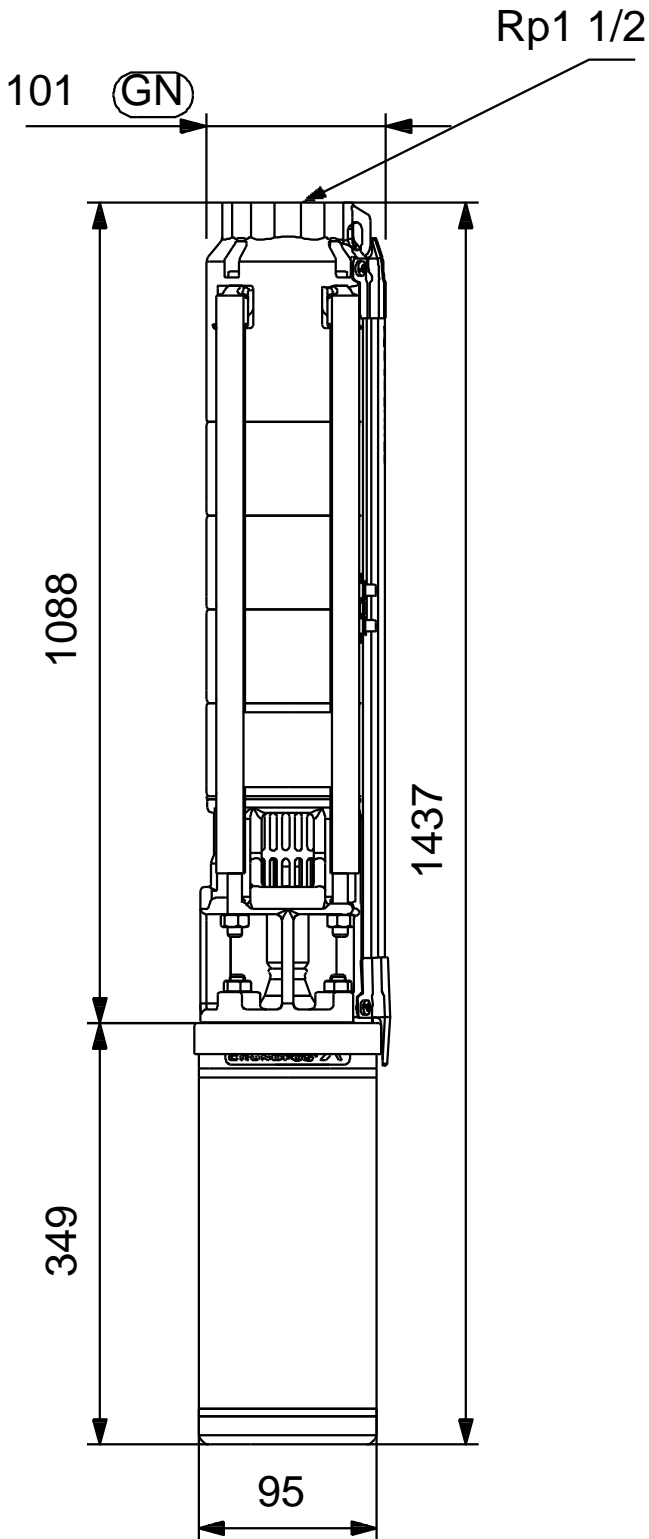

98699189 SP 7-17 50



!

[],