

1 SP 7-31



: 98699202

, EN 1.4301 (AISI 304),

MS40004

40 °C.

MP204

Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

: 20 °C

998.2 / <sup>3</sup>

: 2900 /

7 <sup>3</sup>/

142.5

: HM/CER

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4301

AISI AISI 304

EN 1.4301


AISI AISI 304

DIN W.-Nr. 1.4301

AISI 304

: Rp1 1/2  
 : 4 inch  
 :  
 : MS4000  
 - P2: 4  
 ( 2), : 4  
 : 50 Hz  
 : 3 x 380-400-415  
 : 9.75-9.60-9.80 A  
 : 460-500-530 %  
 Cos - : 0.85-0.80-0.77  
 : 2850-2865-2875 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195510  
 :  
 ErP : MEI : 0.70  
 : EuP /  
 : 43.8  
 : 79.1  
 : 0.295 <sup>3</sup>

## 98699202 SP 7-31 50

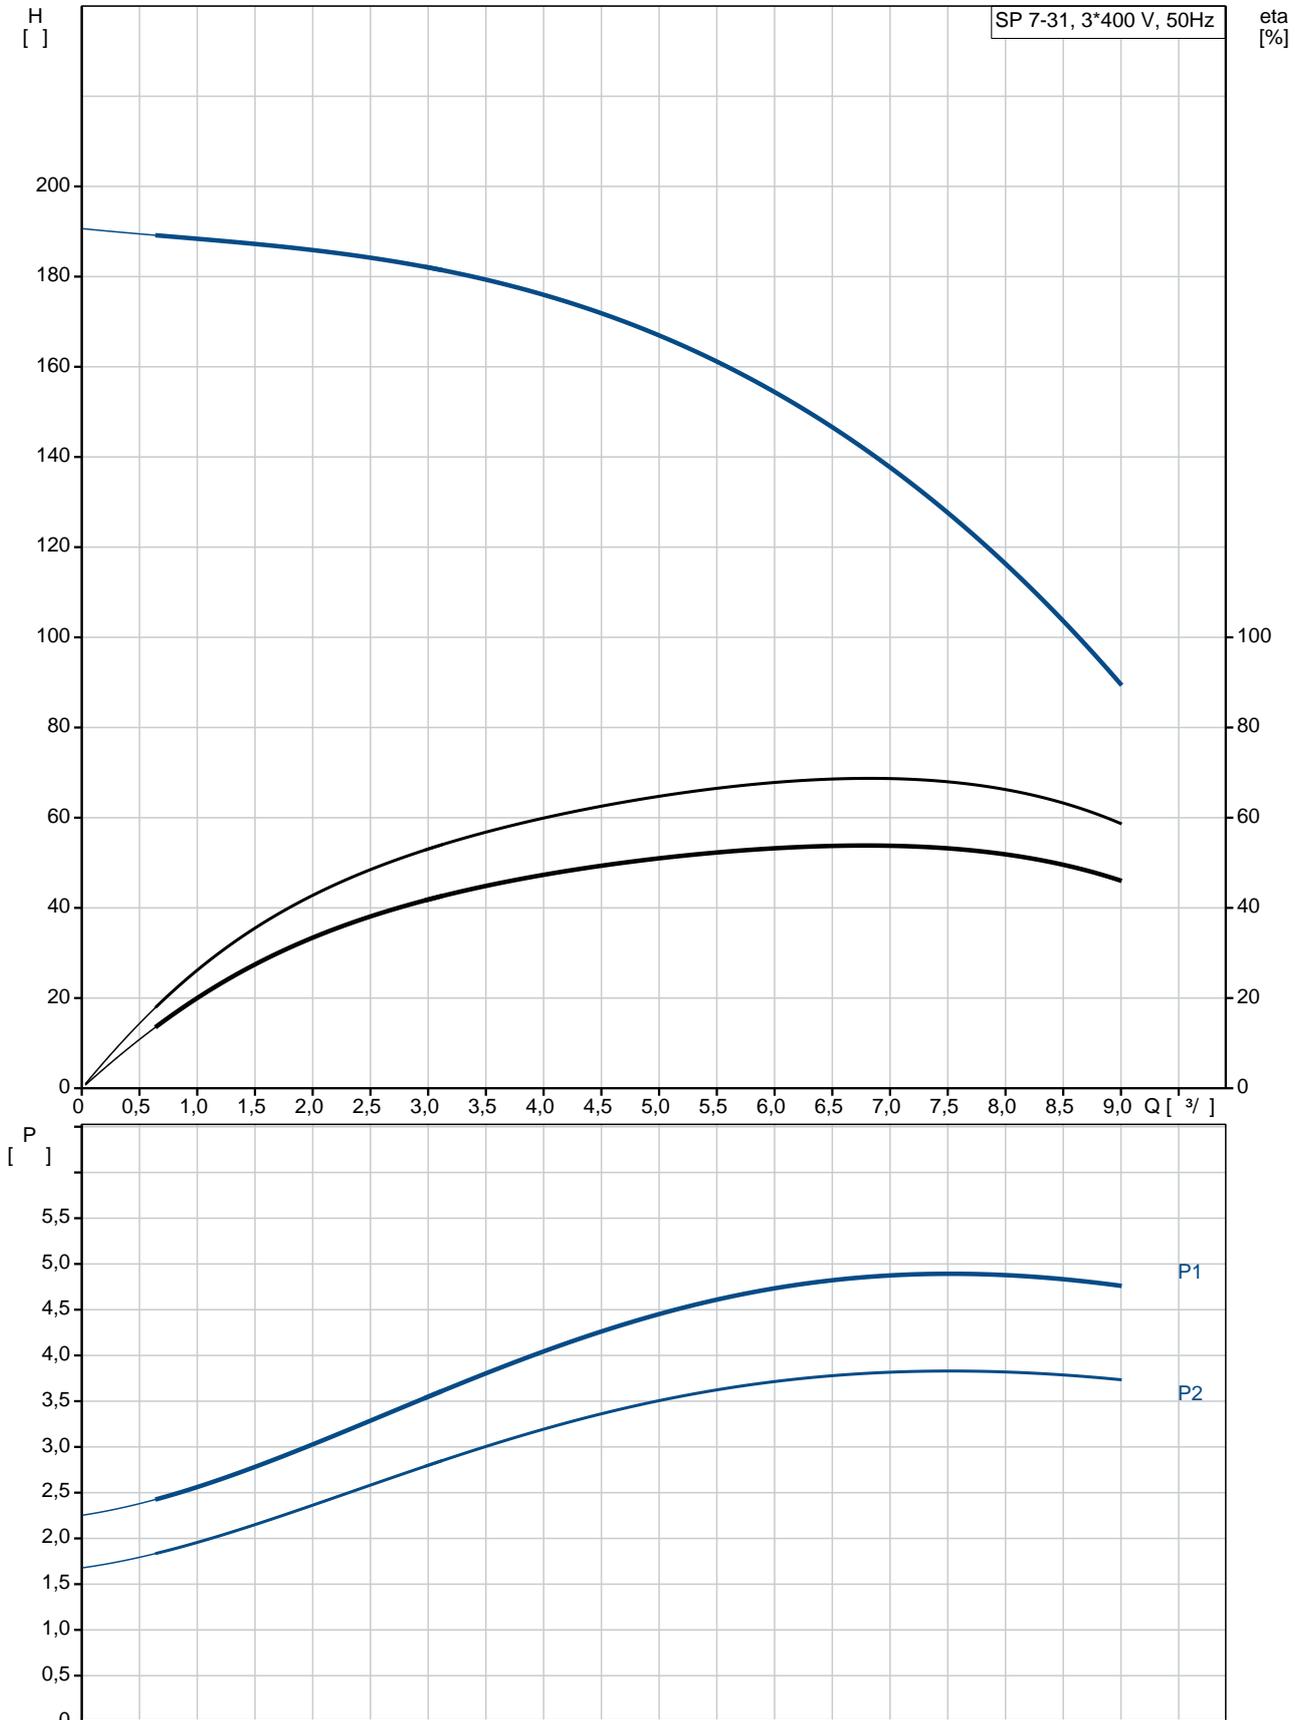

SP 7-31  
 EAN : 98699202  
 5712600108875

2900 /  
 7 3/  
 142.5  
 31  
 NONE  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

Rp1 1/2  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / 3

MS4000  
 NEMA  
 - P2: 4  
 ( 2), 4

50 Hz  
 3 x 380-400-415  
 9.75-9.60-9.80 A  
 460-500-530 %  
 Cos - : 0.85-0.80-0.77  
 2850-2865-2875 /


(IEC 34-5): IP68  
 (IEC 85): F

79195510

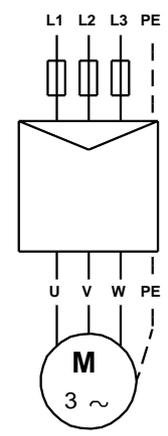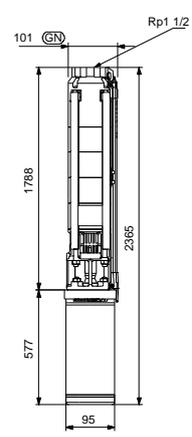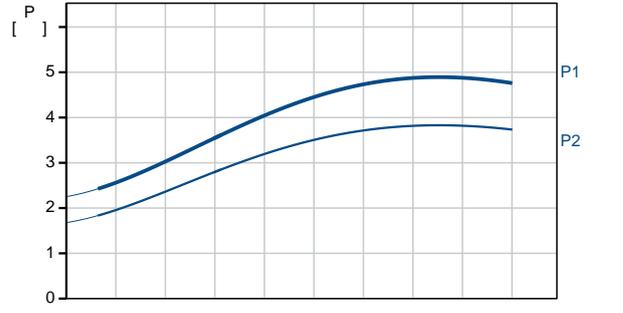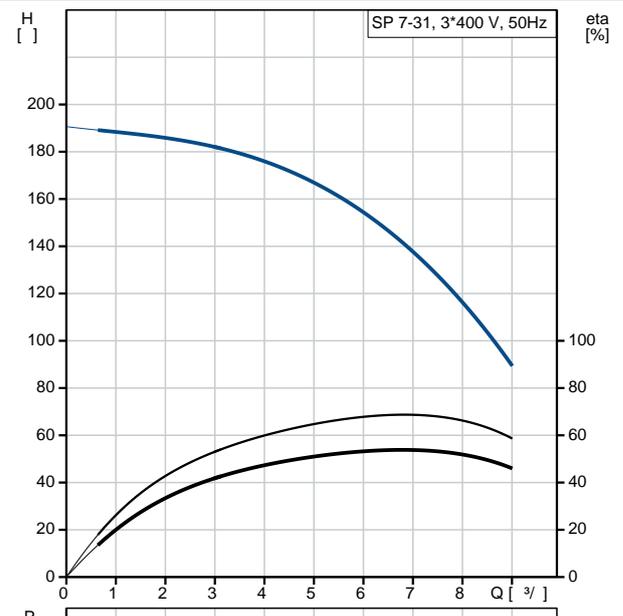


MEI :	0.70
ErP :	EuP / .
:	43.8
:	79.1
:	0.295 <sup>3</sup>

## 98699202 SP 7-31 50

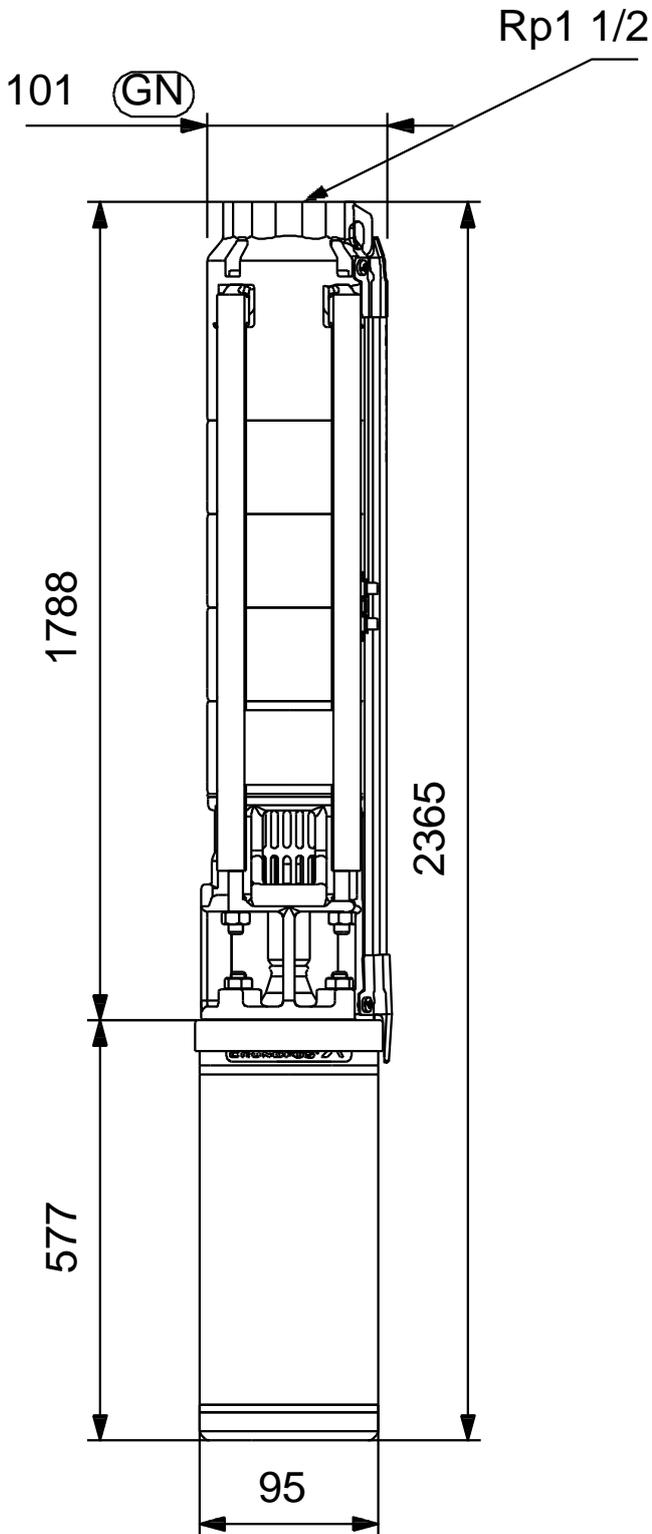

98699202 SP 7-31 50

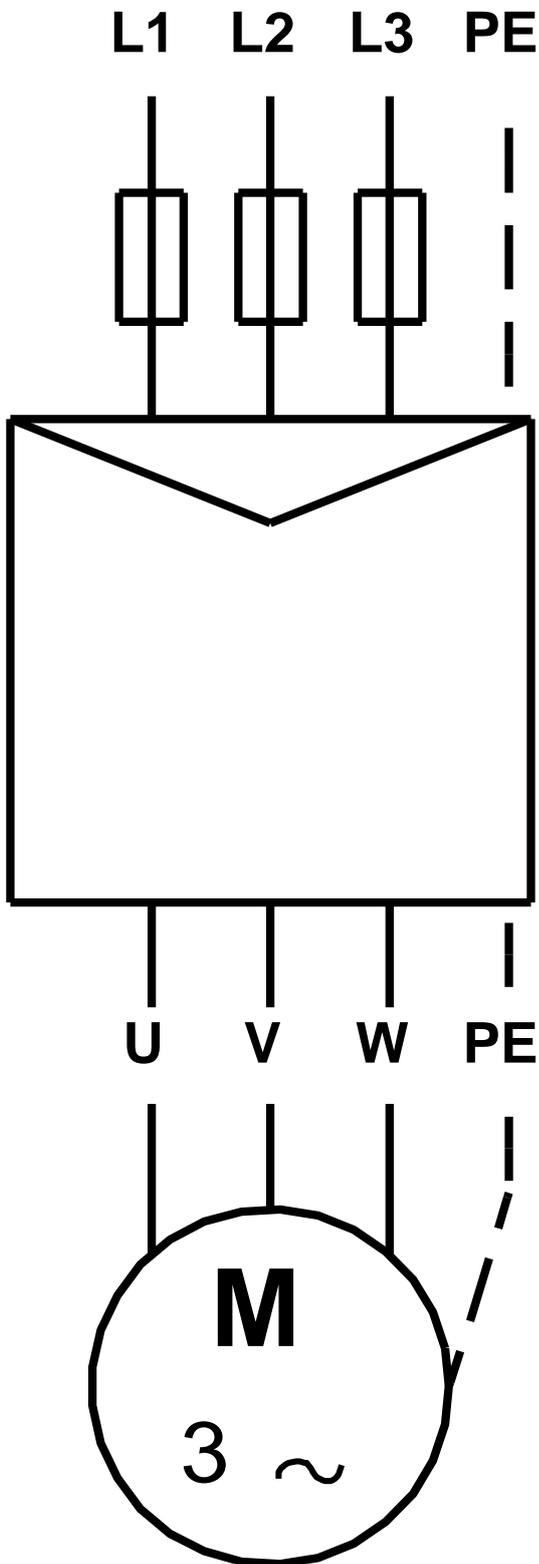

!

[ ],