

1 SP 9-5R



: 98699984

, EN 1.4539 (AISI 904L),

MS40001.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 .t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³

: 2900 /

: 9 ³/
 : 25.5
 : SIC/SIC
 : CE,EAC
 - : ISO9906:2012 3B
 : T40


EN 1.4539
 AISI AISI 904L

EN 1.4539
 AISI AISI 904L

DIN W.-Nr. 1.4539
 AISI 904 L

: Rp2
 : 4 inch
 :
 : MS4000
 - P2: 1.1
 (2), : 1.1
 : 50 Hz
 : 3 x 380-400-415
 : 2.80-2.75-2.75 A
 : 440-480-500 %
 Cos - : 0.85-0.82-0.78
 : 2850-2870-2880 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79194605
 :
 ErP : MEI : 0.70
 : EuP / .
 : 20.7
 : 22.2
 : 0.016 ³

98699984 SP 9-5R 50

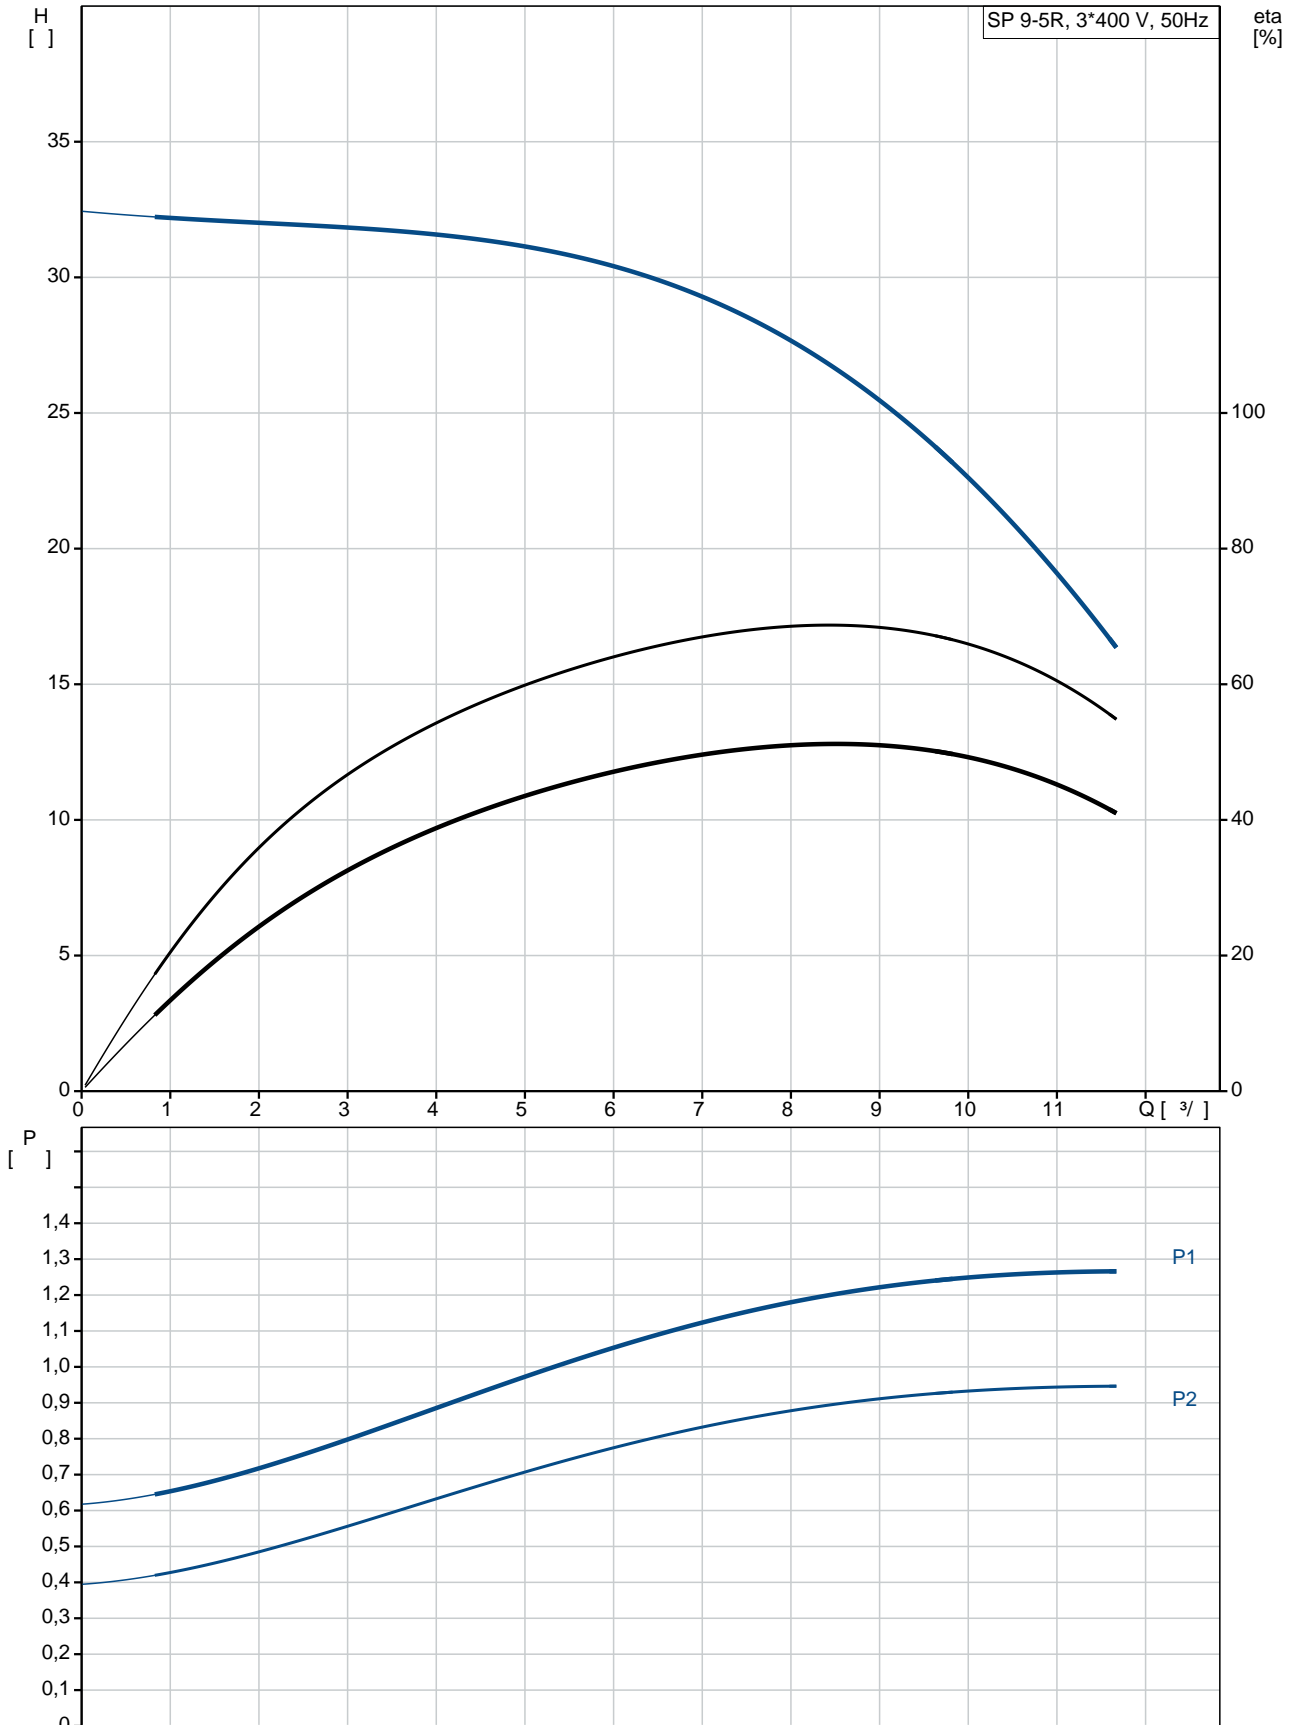

SP 9-5R
 EAN : 98699984
 5712600121522

2900 /
 9 ^{3/}
 25.5
 5
 NONE
 SIC/SIC
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40

EN 1.4539
 AISI AISI 904L
 EN 1.4539
 AISI AISI 904L
 DIN W.-Nr. 1.4539
 AISI 904 L

Rp2
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / ³

MS4000
 NEMA
 - P2: 1.1
 (2), 1.1

50 Hz
 3 x 380-400-415
 2.80-2.75-2.75 A
 440-480-500 %
 Cos - : 0.85-0.82-0.78
 2850-2870-2880 /


(IEC 34-5): IP68
 (IEC 85): F

79194605

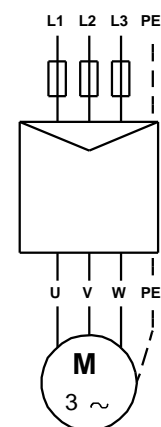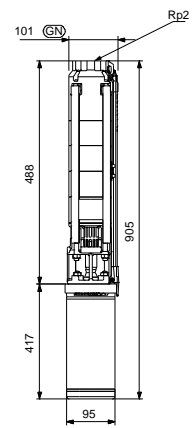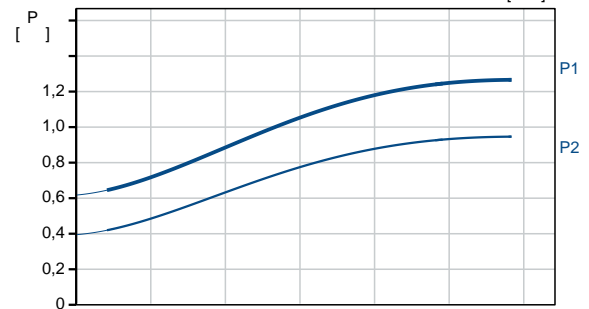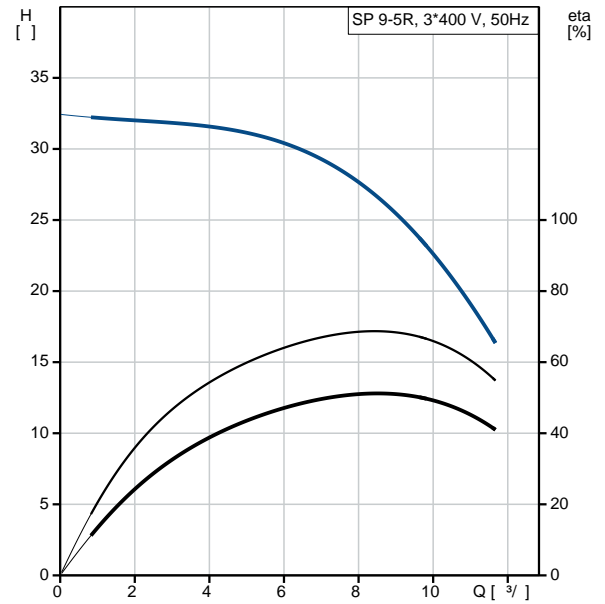


MEI :	0.70
ErP :	EuP
:	20.7
:	22.2
:	0.016 ³

98699984 SP 9-5R 50

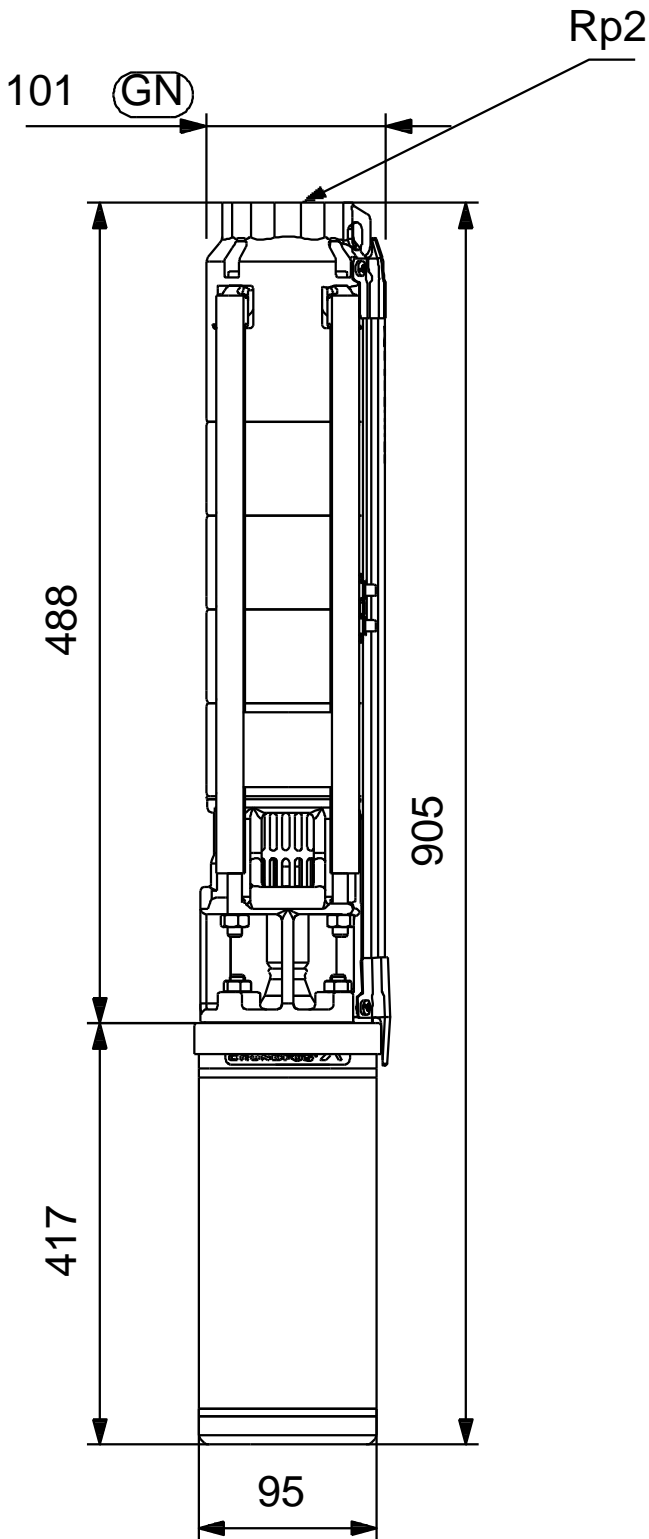

98699984 SP 9-5R 50

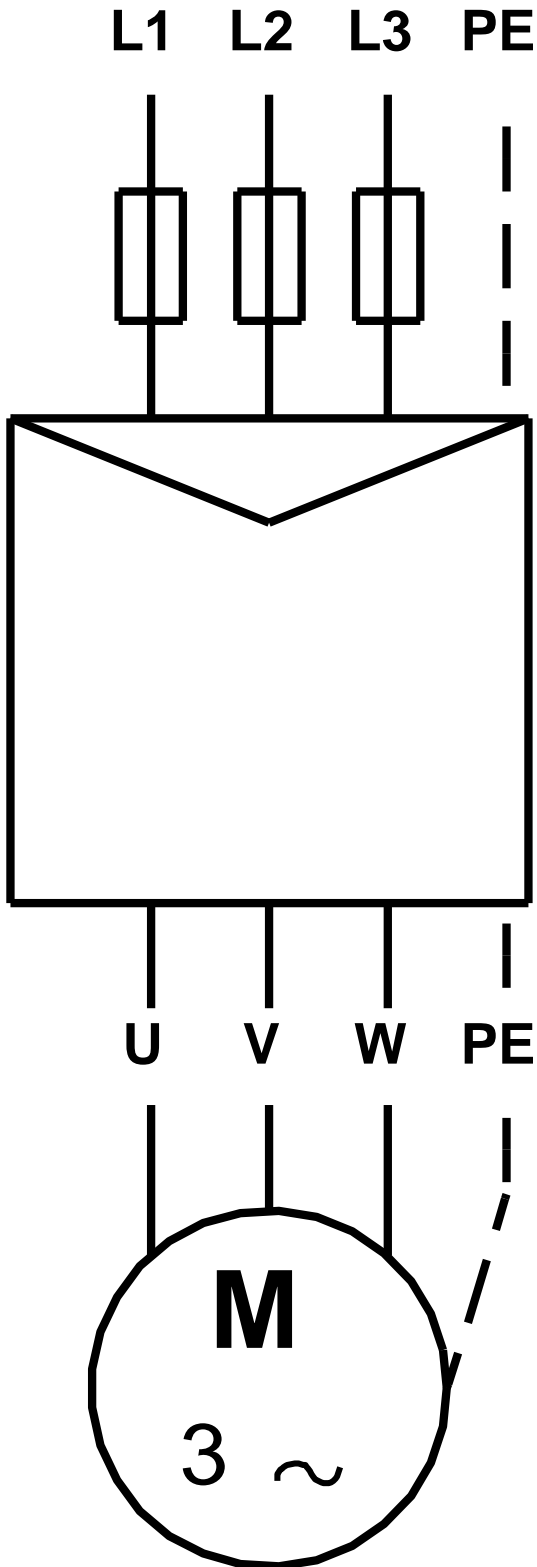

! [], .