

1 TPD 65-210/2 A-F-A-BAQE-JX1



: 98742402

EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

Frequency converter:

: 0 .. 120 °C  
: 20 °C  
998.2 / 3

: 2910 /

39.9 3/  
16.6  
: 127  
: BAQE  
- : ISO9906:2012 3B2

c : EN-GJL-250  
ASTM class 35


, EN/DIN: EN-GJL-200  
, AISI/ASTM: ASTM class 30

: -30 .. 60 °C





16  
- : 16 / 120 °C  
: DIN  
: DN 65

: PN 16  
 : 360  
 : FF215  
 :  
 : 100LC  
 - : IE3  
 - P2: 3  
 : 50 Hz  
 : 3 x 380-415D  
 : 6.3 A  
 : 840-920 %  
 Cos - : 0.87-0.82  
 : 2900-2920 /  
 : IE3 87,1%  
 : 87.1 %  
 3/4 : 88.0 %  
 1/2 : 87.7 %  
 : 2  
 (IEC 34-5): 55 Dust/Jetting  
 (IEC 85): F  
 : 87272297  
 :  
 , MEI : 0.7  
 ( ): 128  
 ( ): 152  
 : 0.45 <sup>3</sup>  
 C : HU  
 : 8413705100

## 98742402 TPD 65-210/2 A-F-A-BAQE-JX1 50

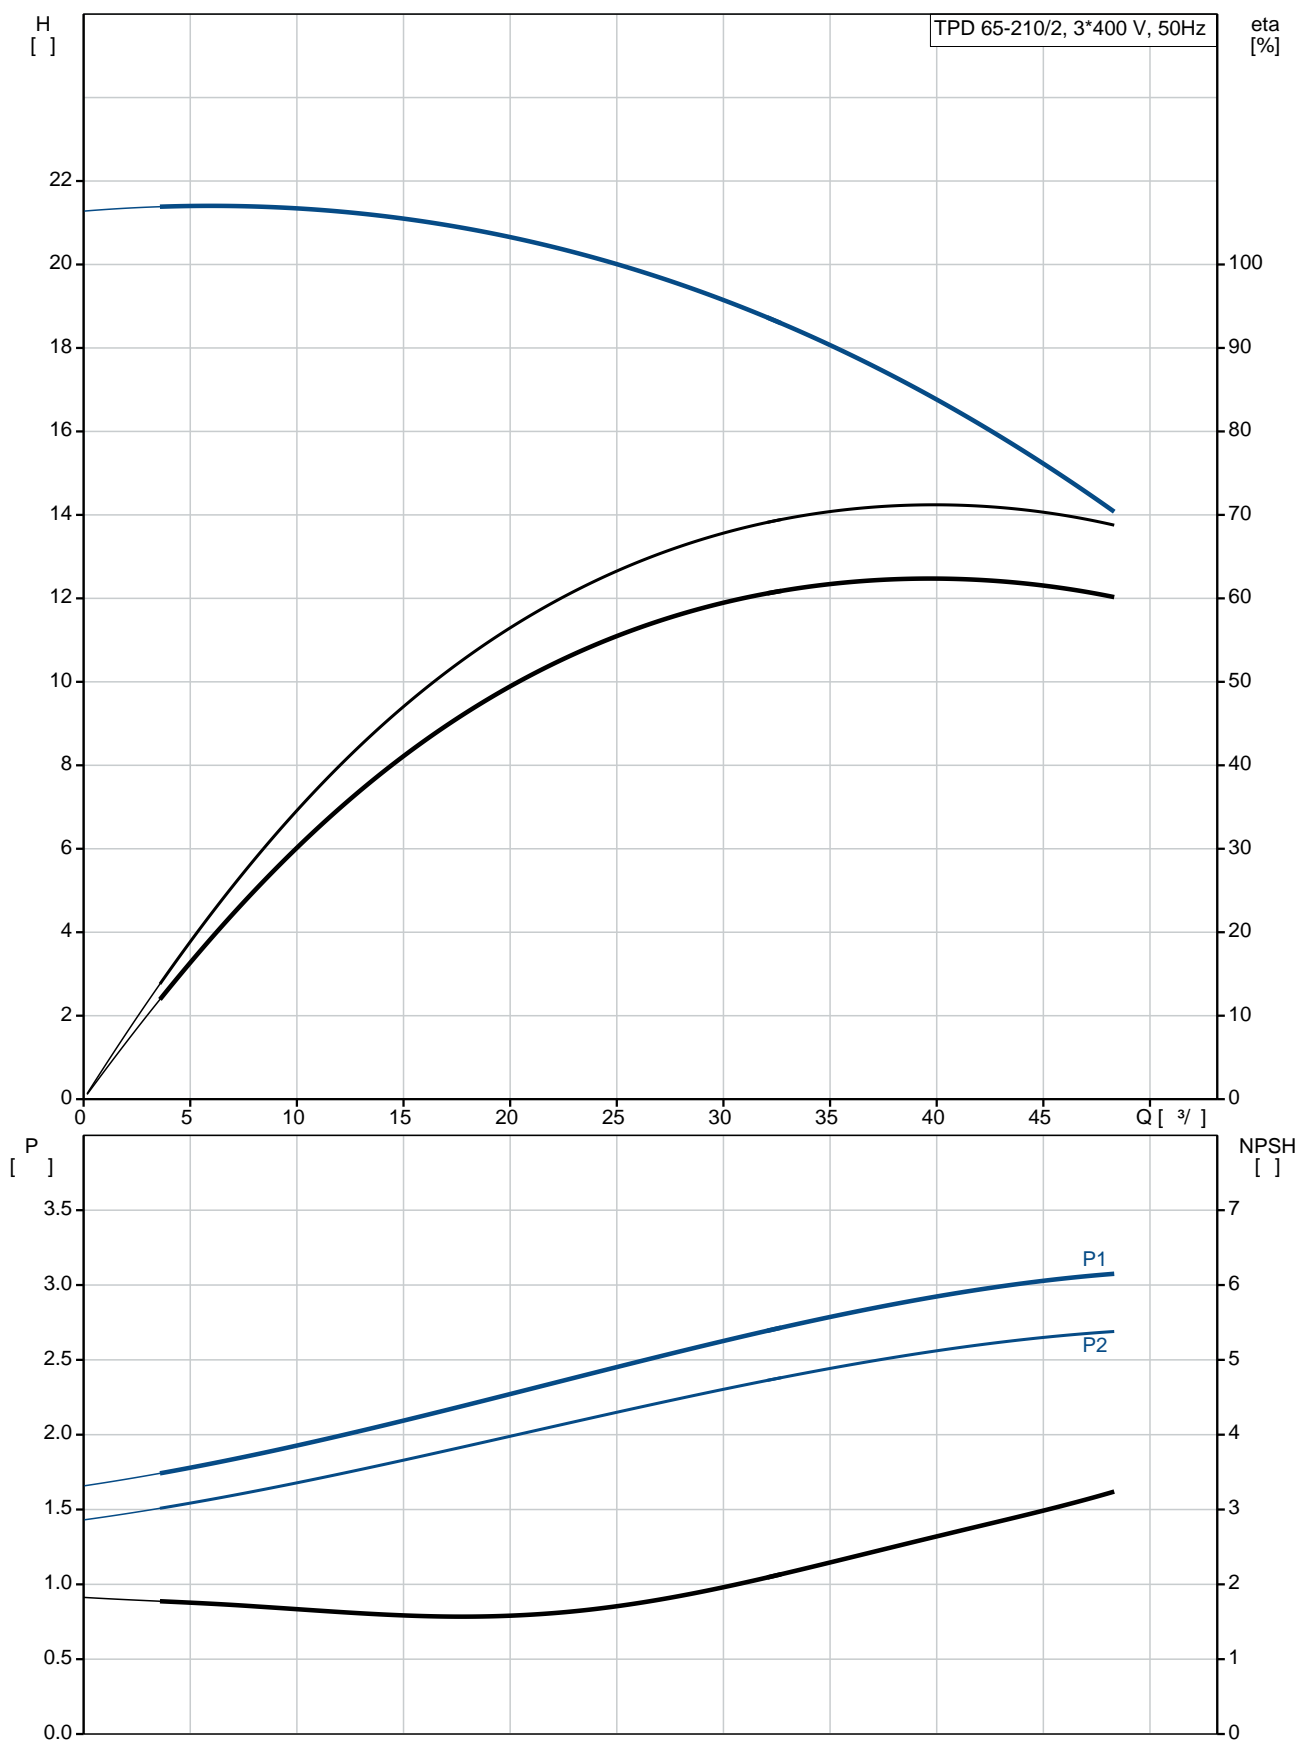


	TPD 65-210/2
	A-F-A-BAQE-JX1
	98742402
EAN	5712600811249
	2910 /
	39.9 <sup>3</sup> /
	16.6
	210
	127
	BAQE
	ISO9906:2012 3B2
	A
	EN-GJL-250
	ASTM class 35
	EN-GJL-200
	ASTM class 30
	A
	-30 .. 60 °C
	16
	16 / 120 °C
	DIN
	DN 65
	PN 16
	360
	FF215
	F
	0 .. 120 °C
	20 °C
	998.2 / <sup>3</sup>
	100LC
	IE3
- P2:	3
	50 Hz
	3 x 380-415D
	6.3 A
	840-920 %
Cos	0.87-0.82
	2900-2920 /
	IE3 87,1%
	87.1 %
	3/4 88.0 %
1/2	87.7 %
	2
(IEC 34-5):	55 Dust/Jetting

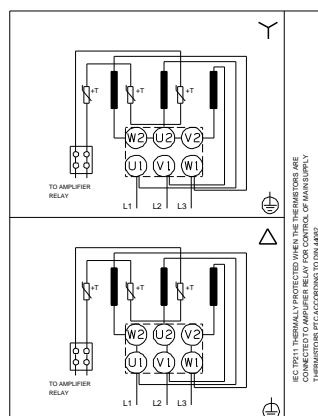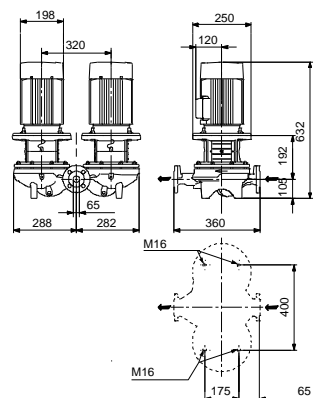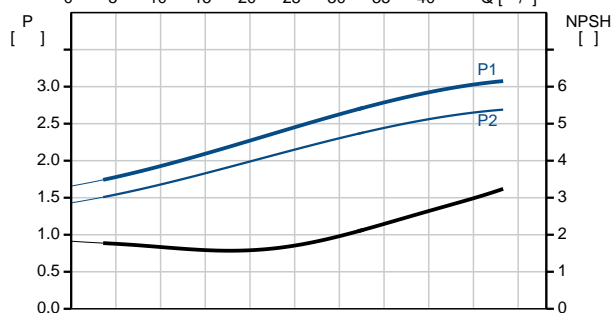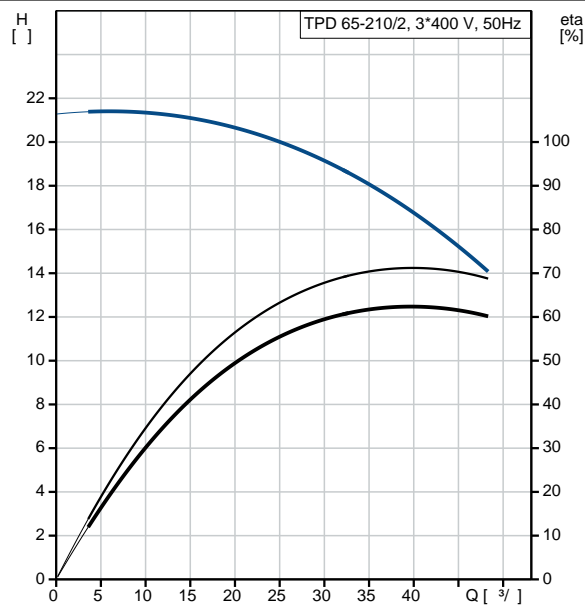

(IEC 85):	F	
:	PTC	
:	87272297	
:		
:		
:		
:		
, MEI :	0.7	
( ):	128	
( ):	152	
:	0.45 <sup>3</sup>	
C :	HU	
:	8413705100	

## 98742402 TPD 65-210/2 A-F-A-BAQE-JX1 50

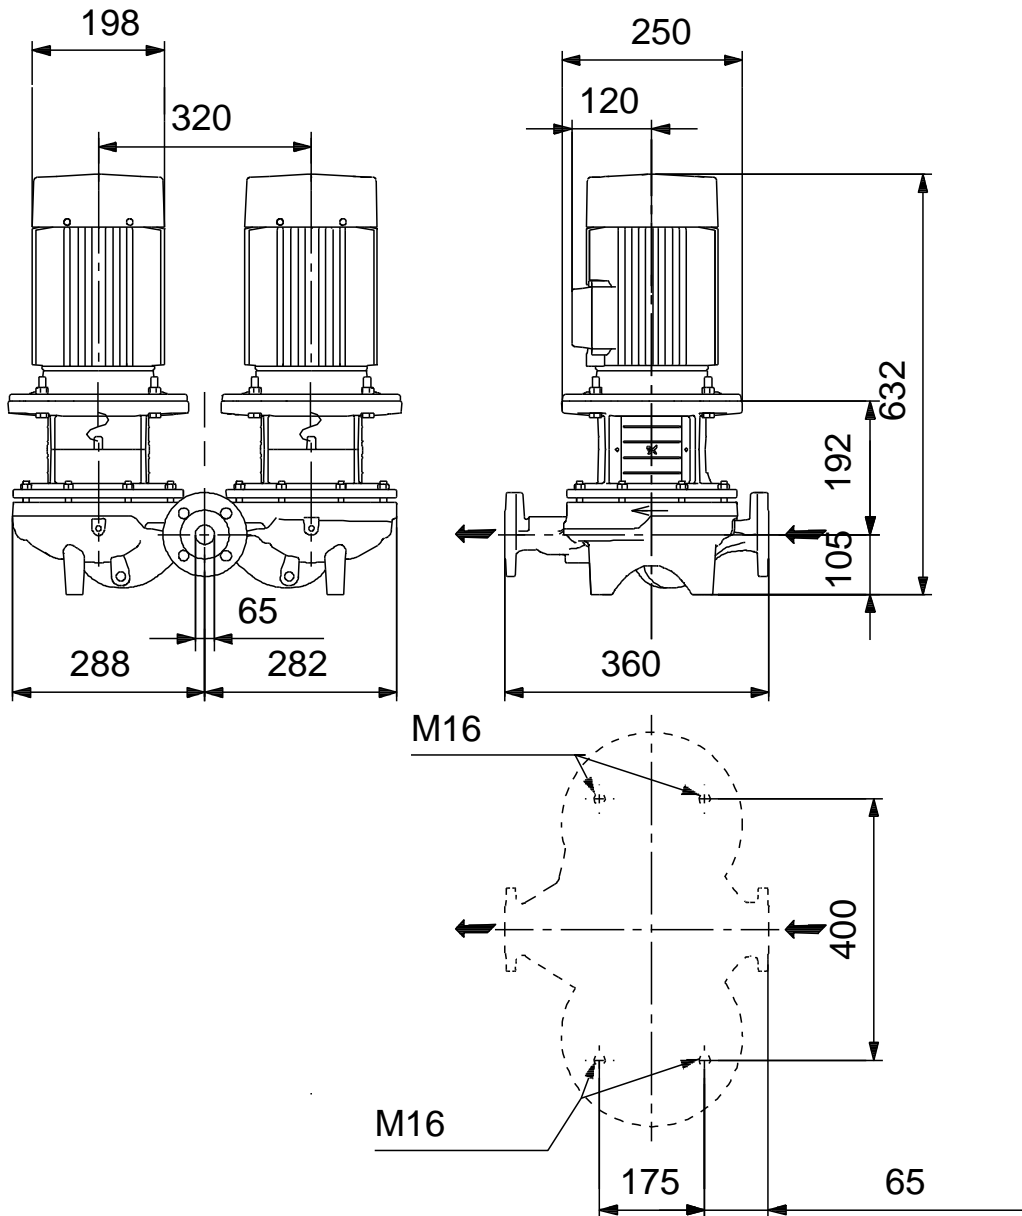

## 98742402 TPD 65-210/2 A-F-A-BAQE-JX1 50

