

1 TPD 50-80/4 A-F-A-BQQE-FX3



: 98760132

EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

Frequency converter:

: -25 .. 120 °C
: 20 °C
998.2 / 3

: 1450 /

16.6 3/
6.97
: 176
: BQQE
- : ISO9906:2012 3B2

c : EN-GJL-250
ASTM class 35


, EN/DIN: EN-GJL-200
, AISI/ASTM: ASTM class 30

: -30 .. 40 °C

16
- : 16 / 120 °C
: DIN
: DN 50

PN 16
440
FF165
90SA
- P2: 0.75
50 Hz
1 x 220-230
5.45 A
320 %
Cos - : 0.96
1390-1410 /
4
(IEC 34-5): 55 Dust/Jetting
(IEC 85): F
87200342
, MEI : 0.7
(): 125
(): 140
0.38 ³

98760132 TPD 50-80/4 A-F-A-BQQE-FX3 50

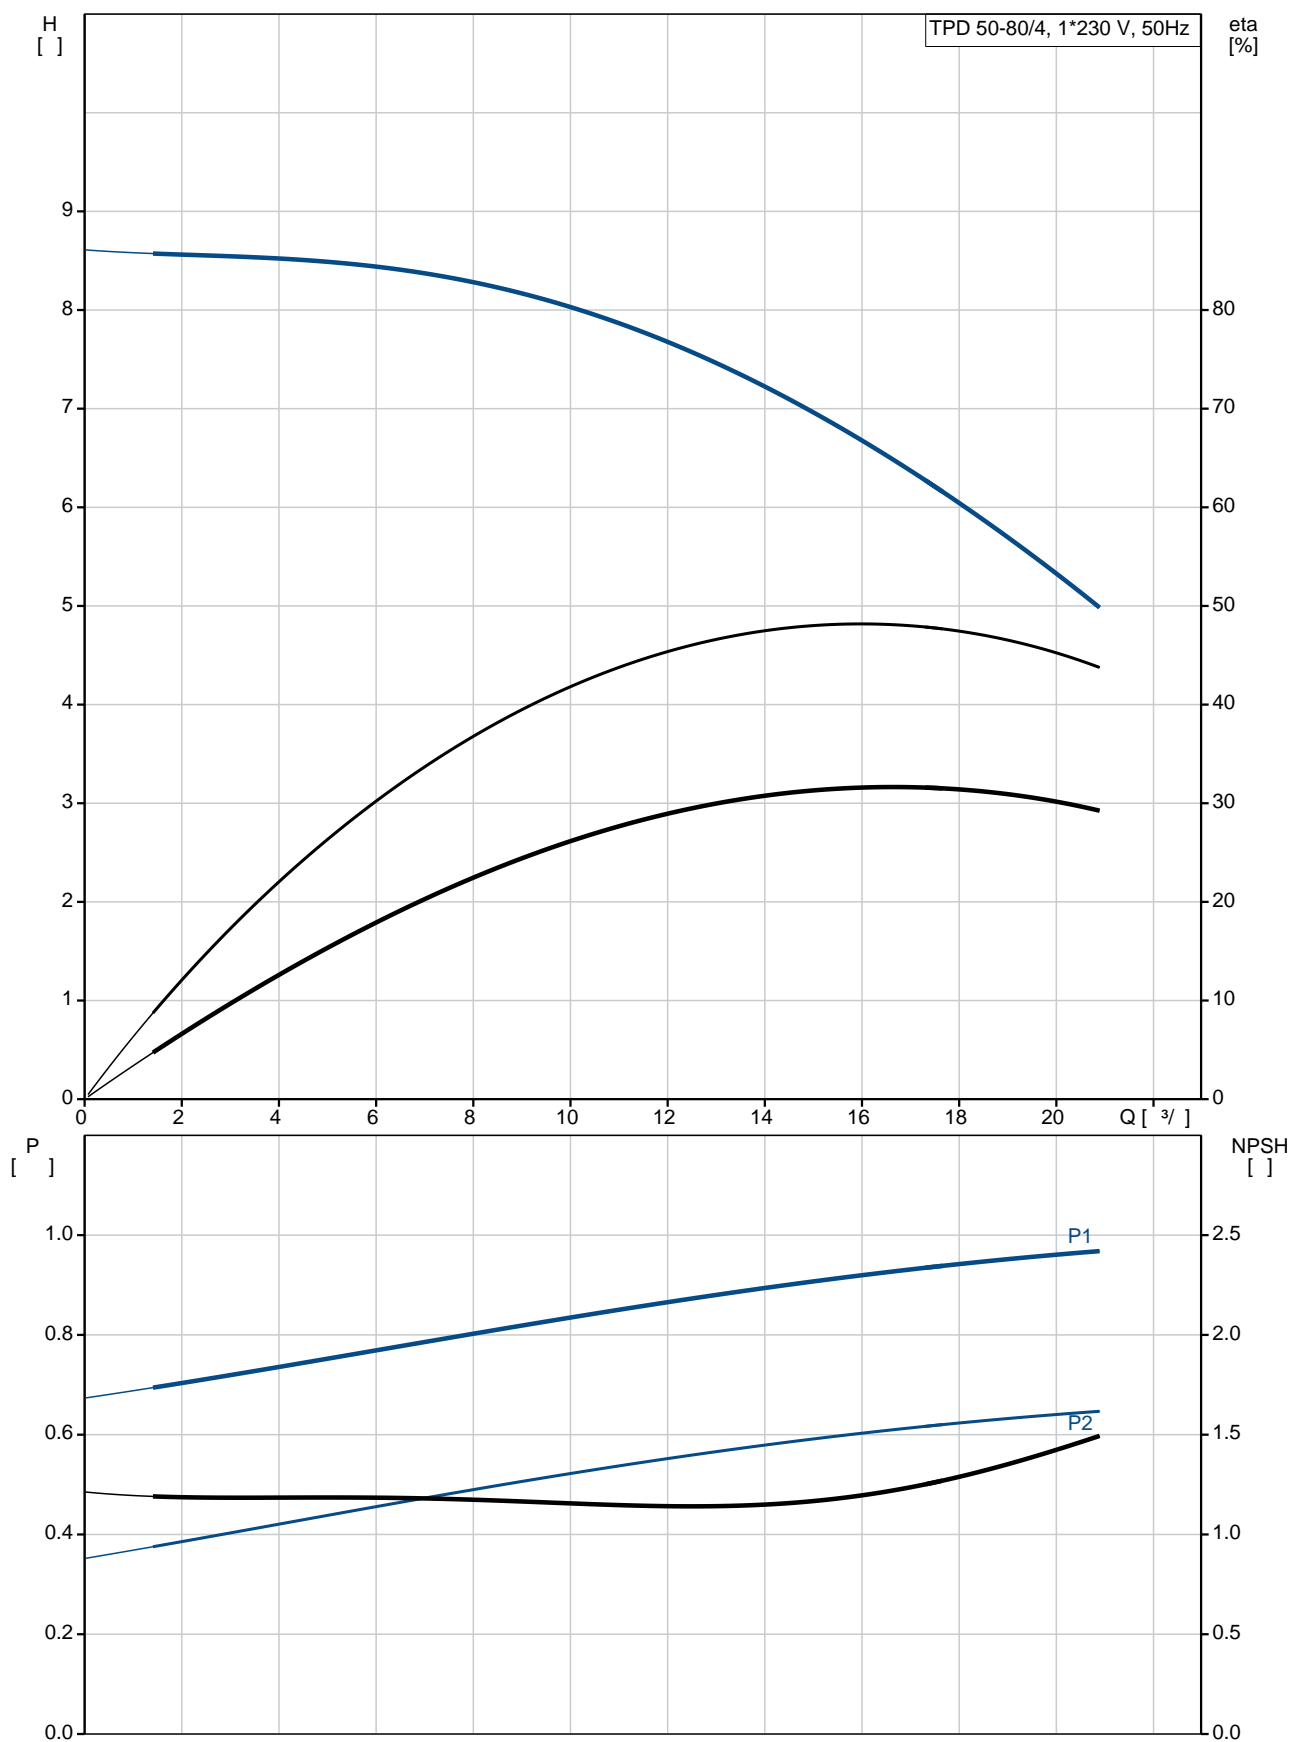

TPD 50-80/4
A-F-A-BQQE-FX3
98760132
EAN : 5712600991170

1450 /
16.6 ³/_l
6.97
80
176
BQQE
ISO9906:2012 3B2
A

EN-GJL-250
ASTM class 35
EN/DIN: EN-GJL-200
ASTM class 30
AISI/ASTM: A

-30 .. 40 °C
16
16 / 120 °C

DIN
DN 50
PN 16
440
FF165
F

-25 .. 120 °C

20 °C

998.2 / ³

90SA
- P2: 0.75
50 Hz
1 x 220-230

5.45 A

320 %

Cos : 0.96

1390-1410 /





4

(IEC 34-5): 55 Dust/Jetting

(IEC 85): F


PTO

87200342

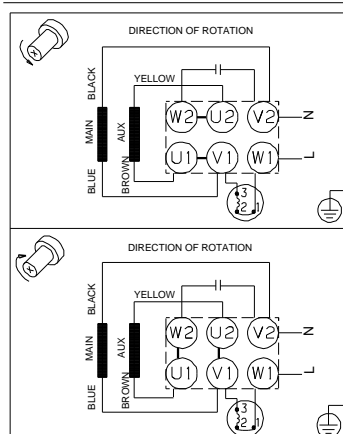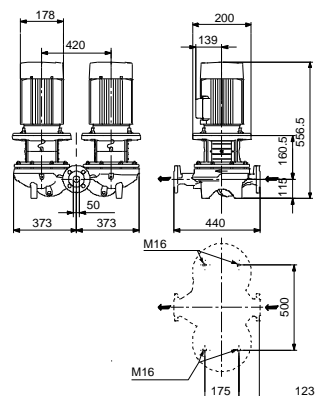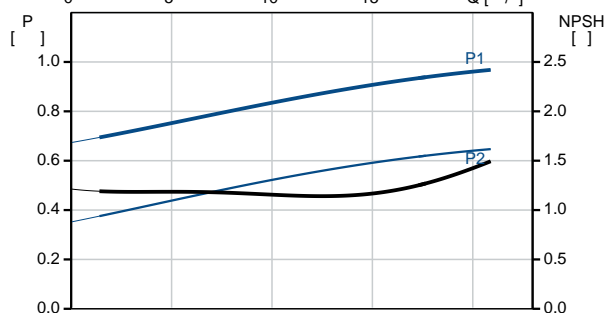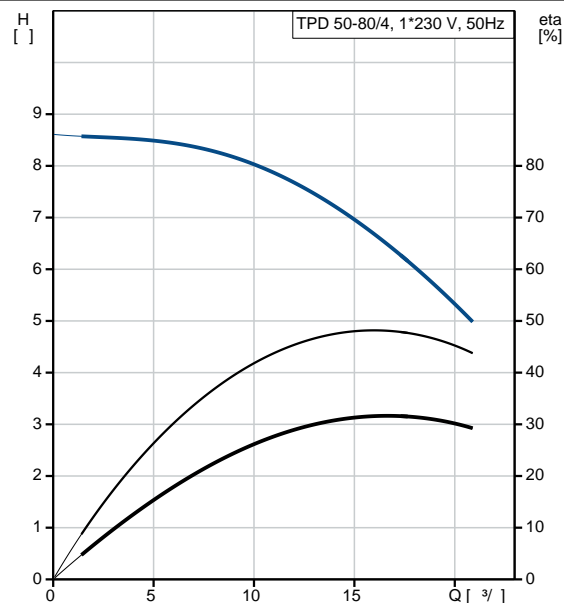

, MEI :	0.7
():	125
():	140
:	0.38 ³

98760132 TPD 50-80/4 A-F-A-BQQE-FX3 50

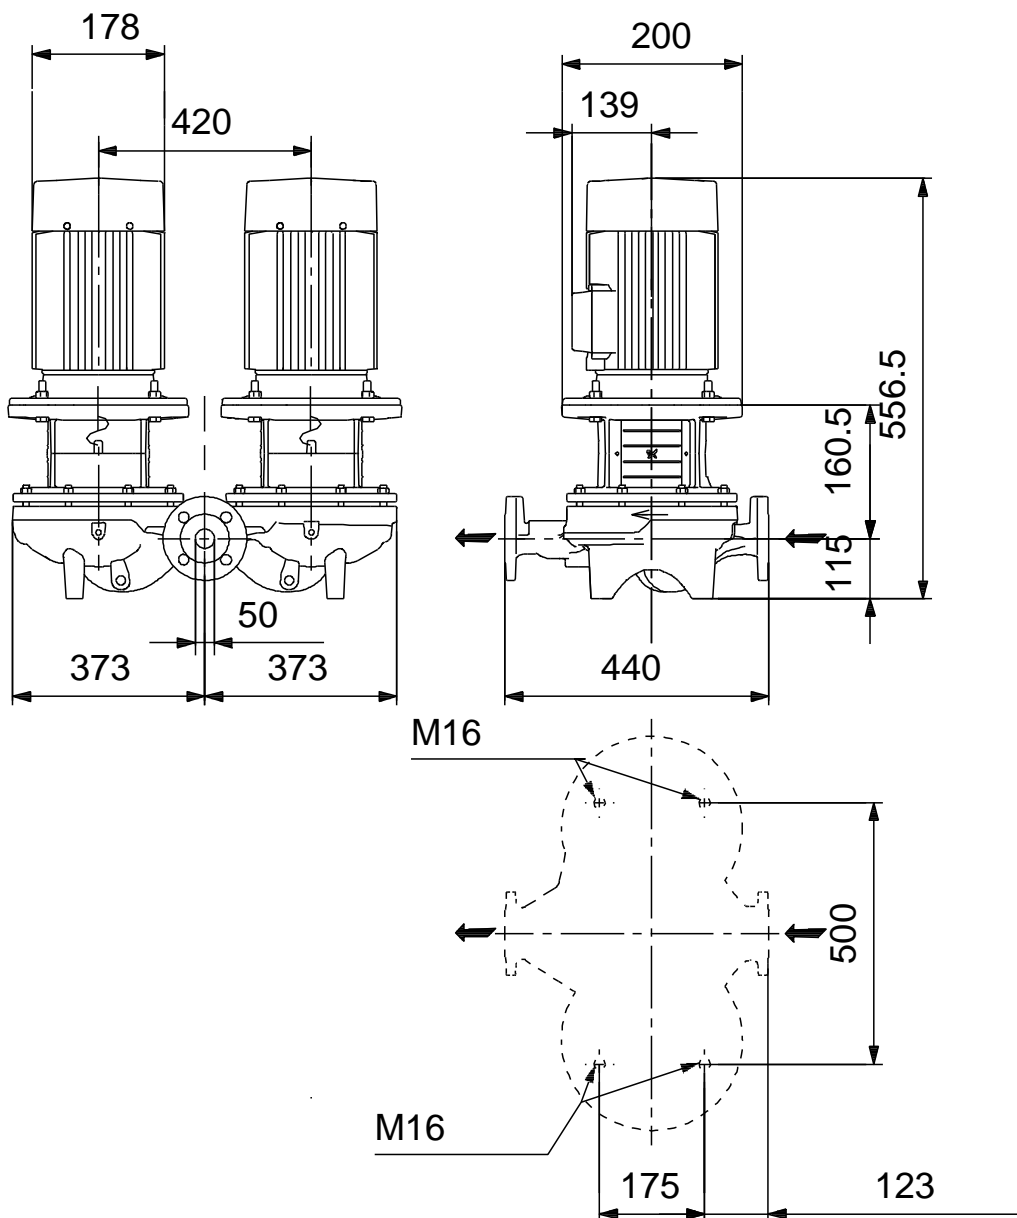

98760132 TPD 50-80/4 A-F-A-BQQE-FX3 50

