

1 TP 50-60/2 A-F-A-BQQE-DX1



: 98957977

12756. Pipework connection is via PN 6/10 DIN flanges (EN 1092-2 and ISO 7005-2).

EN

Frequency converter:

: -25 .. 120 °C
: 20 °C
: 998.2 / 3

: 2870 /

: 16 3/
: 4.6
: 74
: BQQE
- : ISO9906:2012 3B2


c : EN-GJL-250
: ASTM class 35
: EN/DIN: EN 1.4301
, AISI/ASTM: AISI 304

: -30 .. 40 °C





: 10
- : 10 / 120 °C
: DIN
: DN 50

: PN 6/10
 : 280
 : FT85
 :
 : 71B
 - P2: 0.37
 : 50 Hz
 : 1 x 220-230/240
 : 2.95/2.70 A
 : 280 %
 Cos - : 0.99
 : 2770 / : 60.0-56.0 %
 : 2
 (IEC 34-5): 55 Dust/Jetting
 (IEC 85): F
 : 85215102
 :
 , MEI : 0.60
 (): 25.9
 (): 29.4
 : 0.08 ³
 C : RU
 : 8413705100

98957977 TP 50-60/2 A-F-A-BQQE-DX1 50

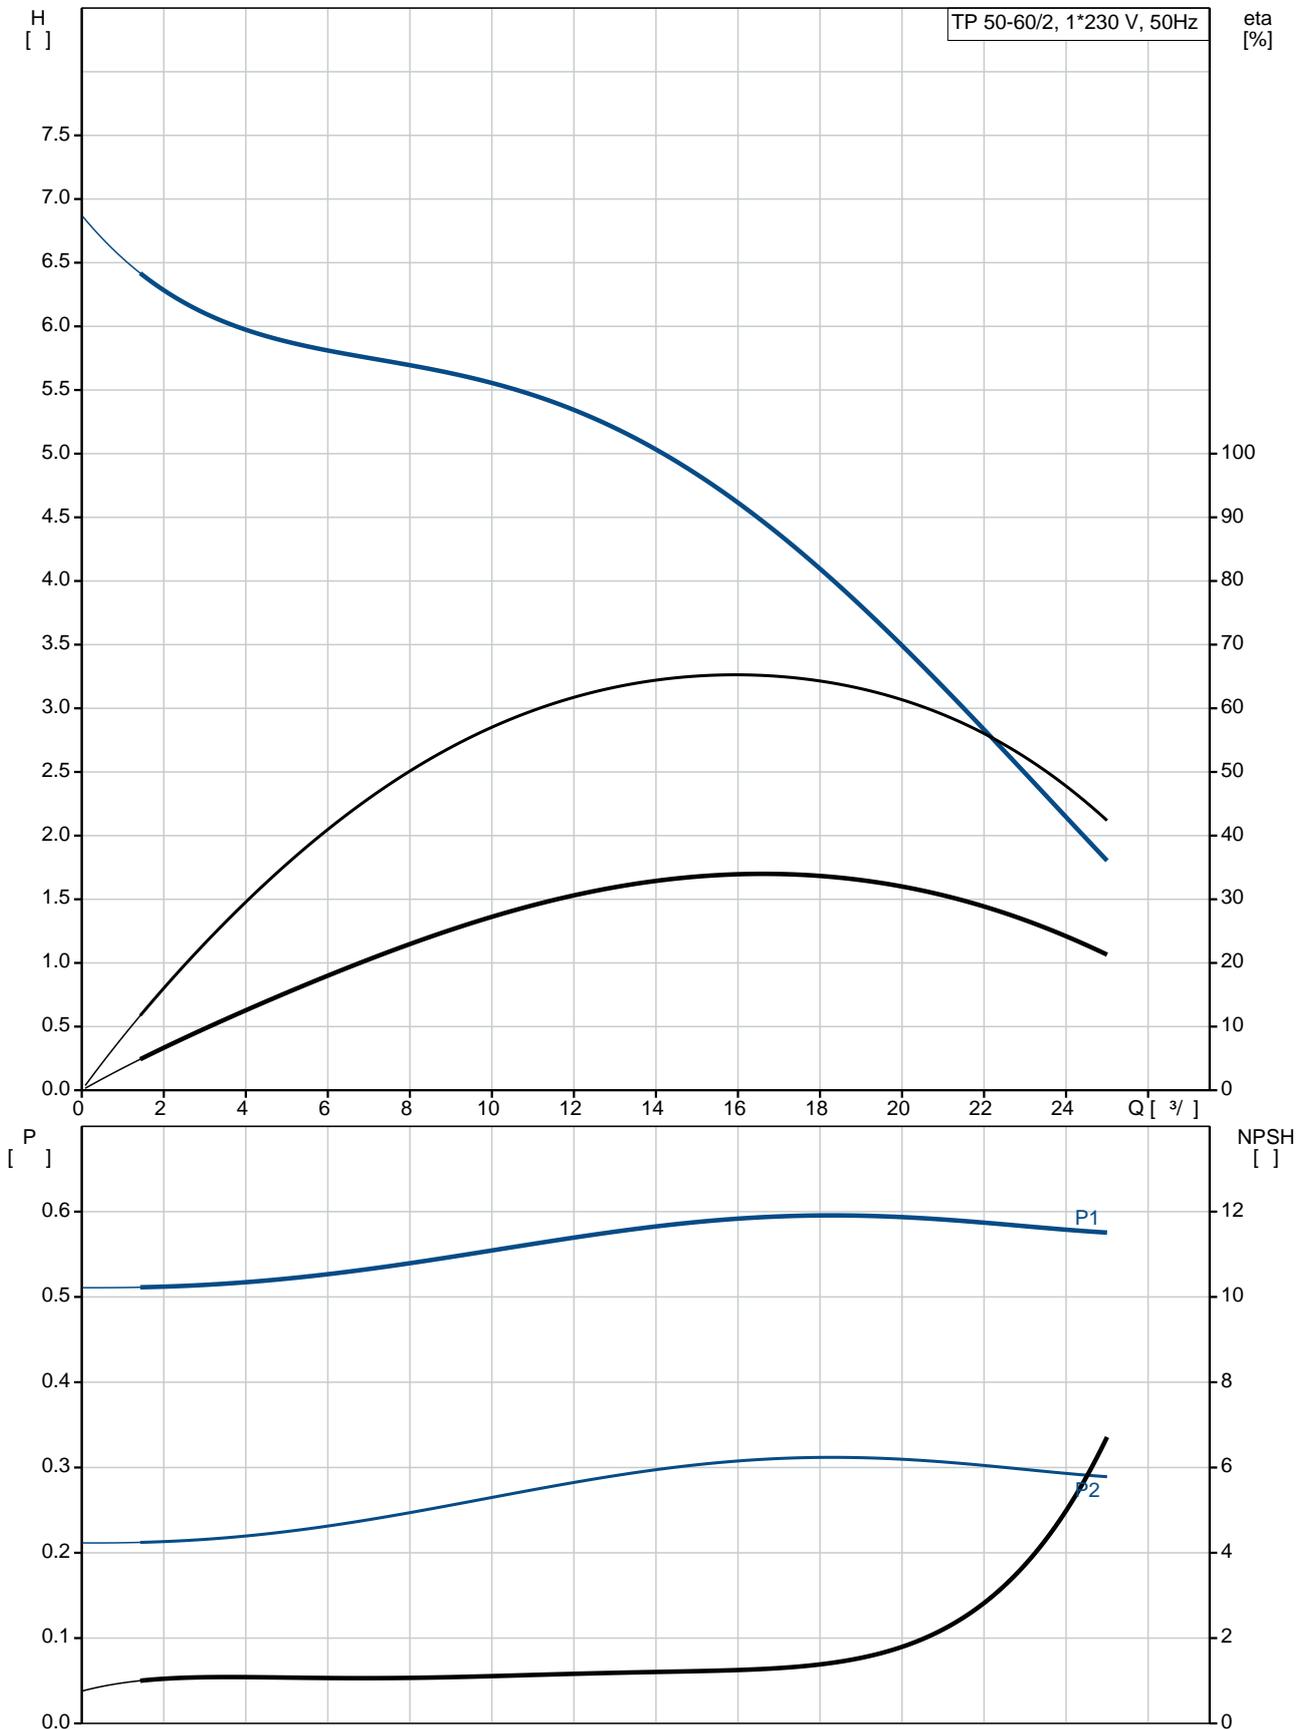


	TP 50-60/2
	A-F-A-BQQE-DX1
	98957977
EAN	5712604244449
	2870 /
	16 ^{3/}
	4.6
	60
	74
	BQQE
	ISO9906:2012 3B2
	A
	EN-GJL-250
	ASTM class 35
	EN/DIN: EN 1.4301
	AISI/ASTM: AISI 304
	A
	-30 .. 40 °C
	10
	10 / 120 °C
	DIN
	DN 50
	PN 6/10
	280
	FT85
	F
	-25 .. 120 °C
	20 °C
	998.2 / ³
	71B
	- P2: 0.37
	50 Hz
	1 x 220-230/240
	2.95/2.70 A
	280 %
Cos	0.99
	2770 /
	60.0-56.0 %
	2
	(IEC 34-5): 55 Dust/Jetting
	(IEC 85): F
	PTO
	85215102

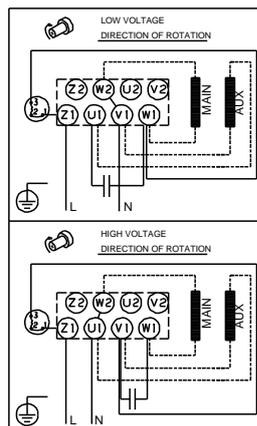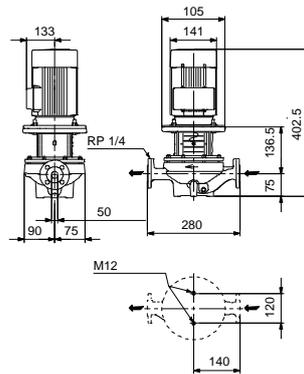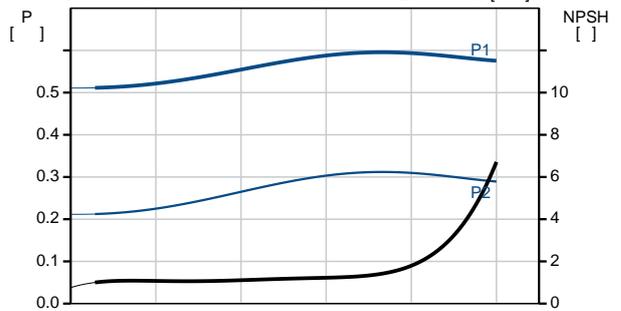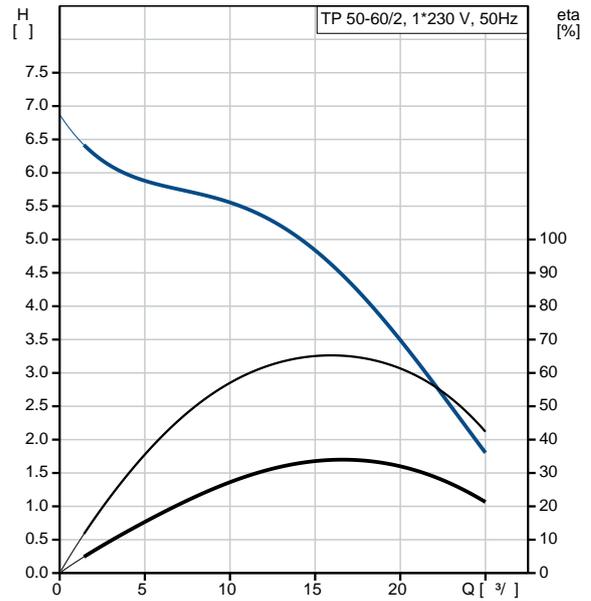

:	
, MEI :	0.60
(): :	25.9
(): :	29.4
:	0.08 ³
C :	RU
:	8413705100

98957977 TP 50-60/2 A-F-A-BQQE-DX1 50

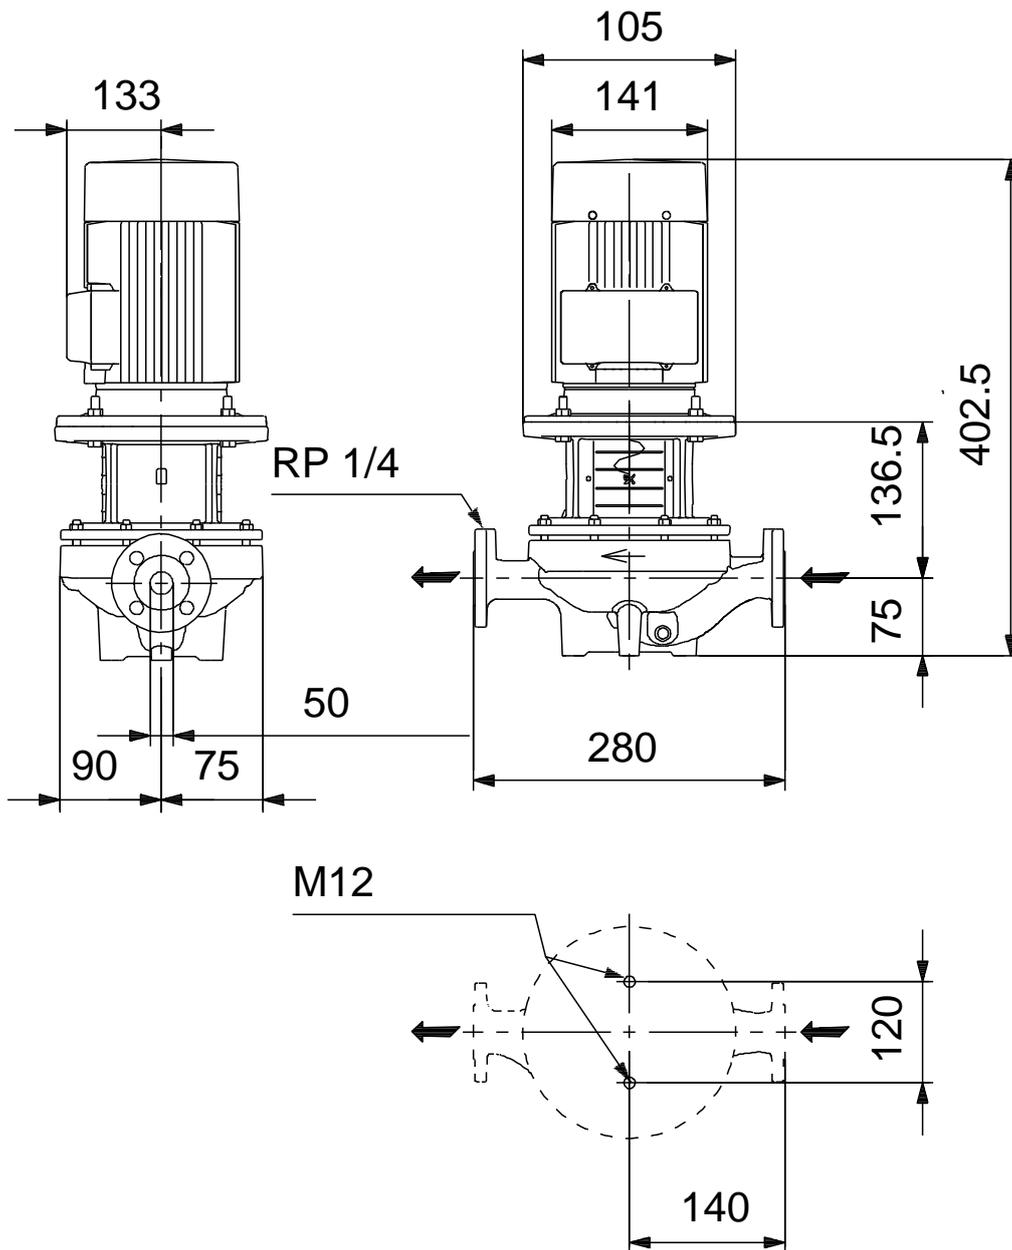

98957977 TP 50-60/2 A-F-A-BQQE-DX1 50

