

1 TPD 80-120/2 AI-F-A-BQQE-HX1



: 98958039

EN 12756. Pipework connection is via PN 6 DIN flanges (EN 1092-2 and ISO 7005-2).

Frequency converter:

: -25 .. 120 °C
: 20 °C
: 998.2 / 3

: 2910 /

: 42.5 3/
: 7.91

: 95
: BQQE
- : ISO9906:2012 3B2

c : EN-GJL-250
: ASTM class 35


, EN/DIN: EN 1.4301
, AISI/ASTM: AISI 304

: -30 .. 60 °C

: 6
- : 6 / 120 °C

: DIN
 : DN 80
 : PN 6
 : 360
 : FT115
 :
 : 90SD
 - : IE3
 - P2: 1.5
 : 50 Hz
 : 3 x 220-240D/380-415Y
 : 5.70/3.30 A
 : 750-820 %
 Cos - : 0.84-0.78
 : 2890-2910 /
 : IE3 84,2%
 : 84.2-84.2 %
 3/4 : 86.4 %
 1/2 : 86.0 %
 : 2
 (IEC 34-5): 55 Dust/Jetting
 (IEC 85): F
 : 85U01906
 :
 , MEI : 0.70
 (): 91.3
 (): 114
 : 0.38 ³

98958039 TPD 80-120/2 AI-F-A-BQQE-HX1 50

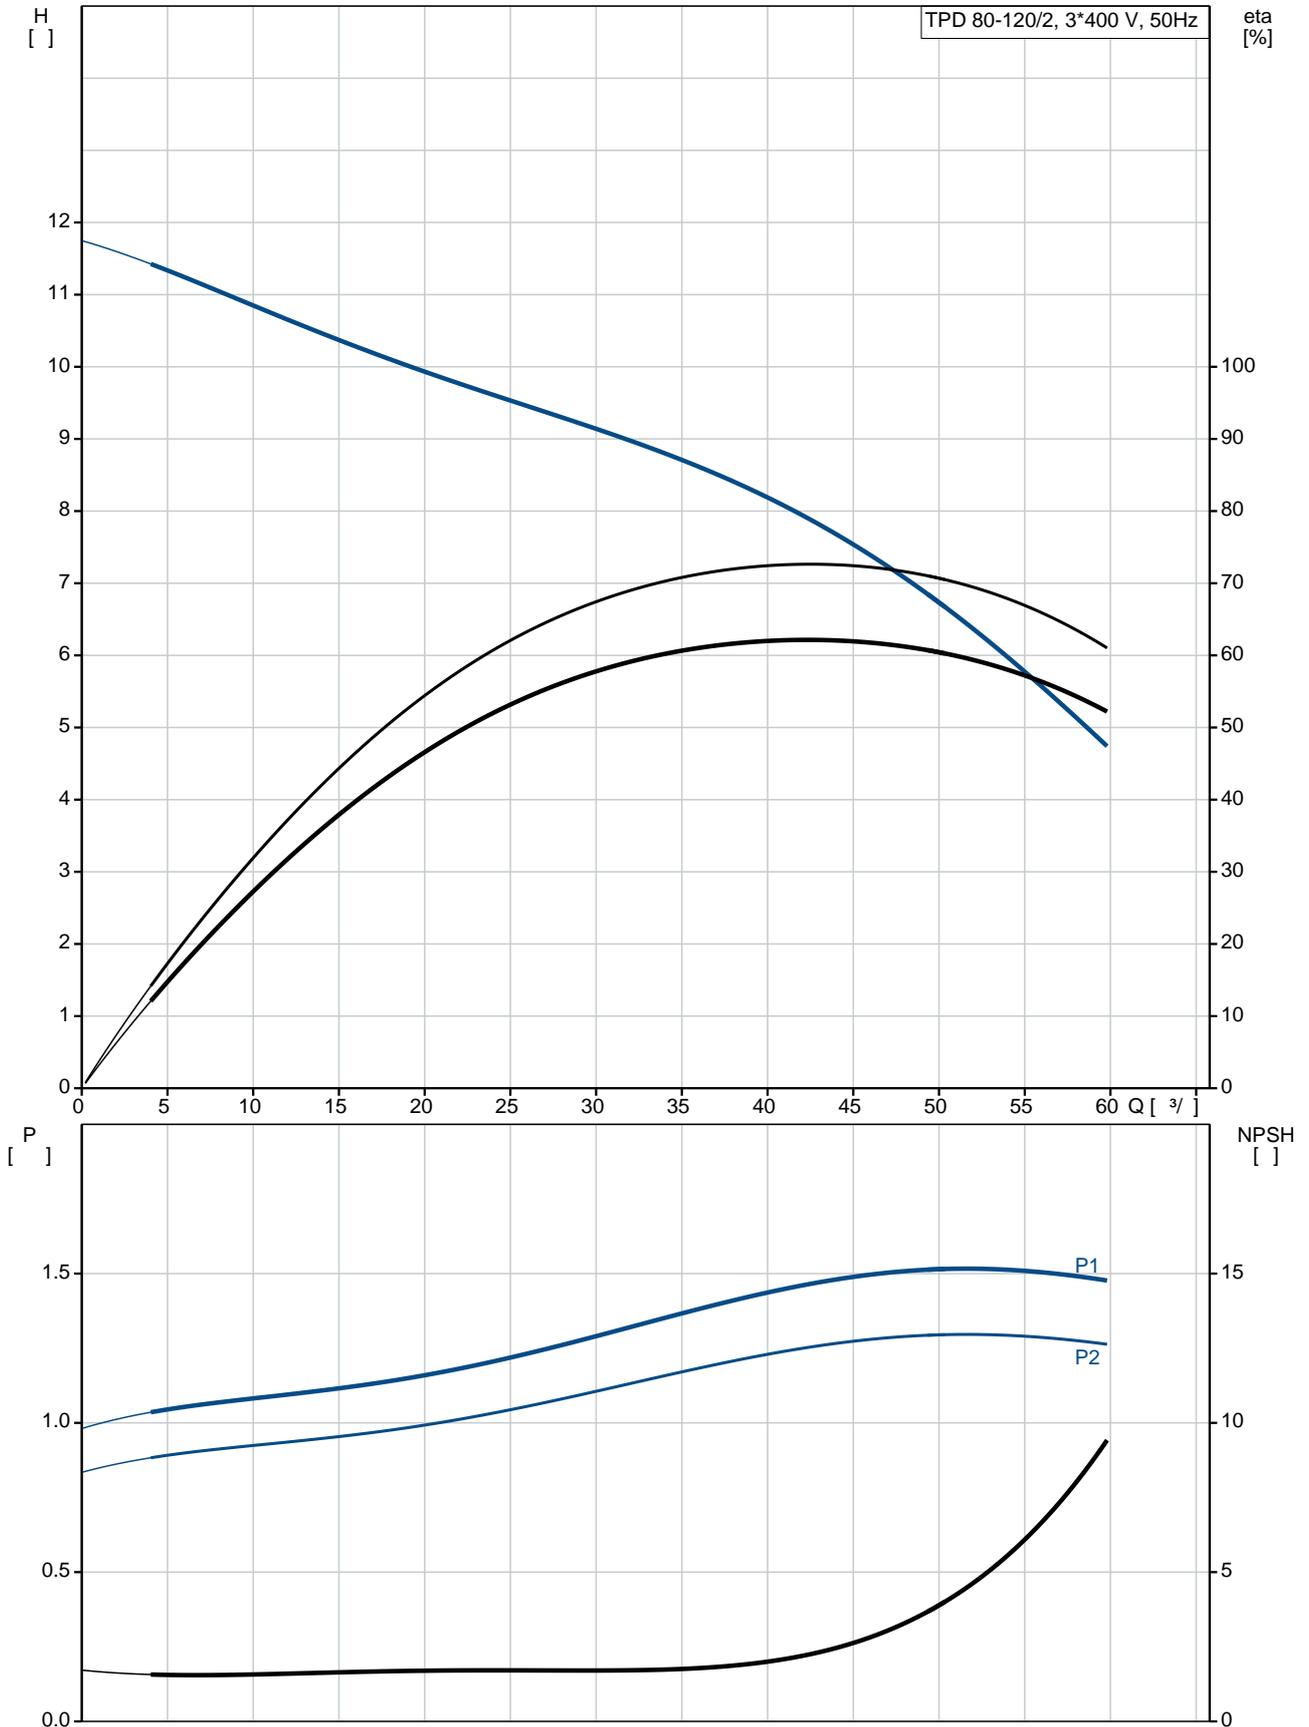

TPD 80-120/2
 AI-F-A-BQQE-HX1
 98958039
 EAN : 5712604245064

2910 /
 42.5 ³/_l
 7.91
 120
 95
 BQQE
 ISO9906:2012 3B2
 AI

c : EN-GJL-250
 ASTM class 35

EN/DIN: EN 1.4301
 AISI/ASTM: AISI 304
 A

-30 .. 60 °C

6

6 / 120 °C

DIN

DN 80

PN 6

360

FT115

F

-25 .. 120 °C

20 °C

998.2 / ³

90SD

IE3

- P2: 1.5

50 Hz

3 x 220-240D/380-415Y

5.70/3.30 A

750-820 %

Cos : 0.84-0.78

2890-2910 /

IE3 84,2%





84.2-84.2 %

3/4 86.4 %


1/2 : 86.0 %

2



TPD 80-120/2, 3*400 V, 50Hz

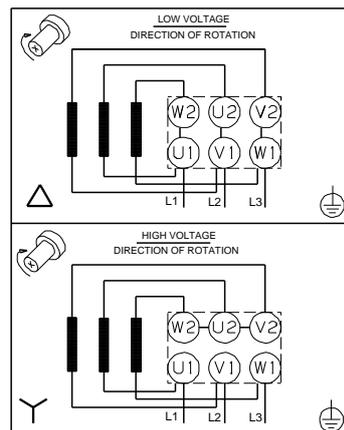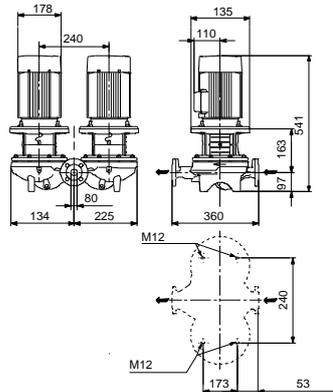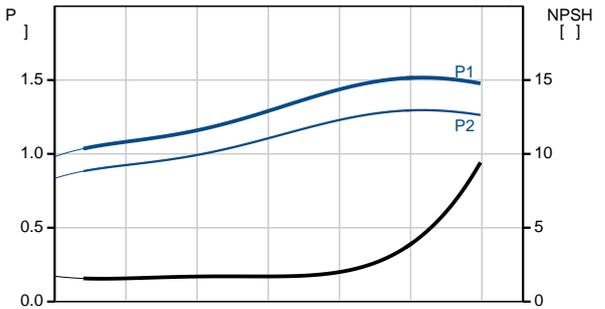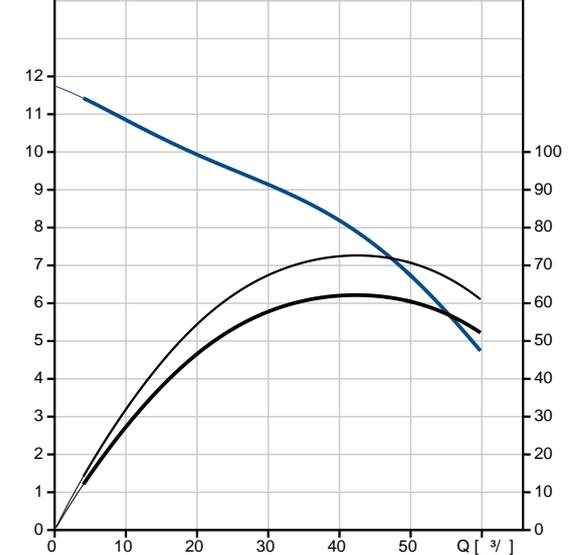

98958039 TPD 80-120/2 AI-F-A-BQQE-HX1 50

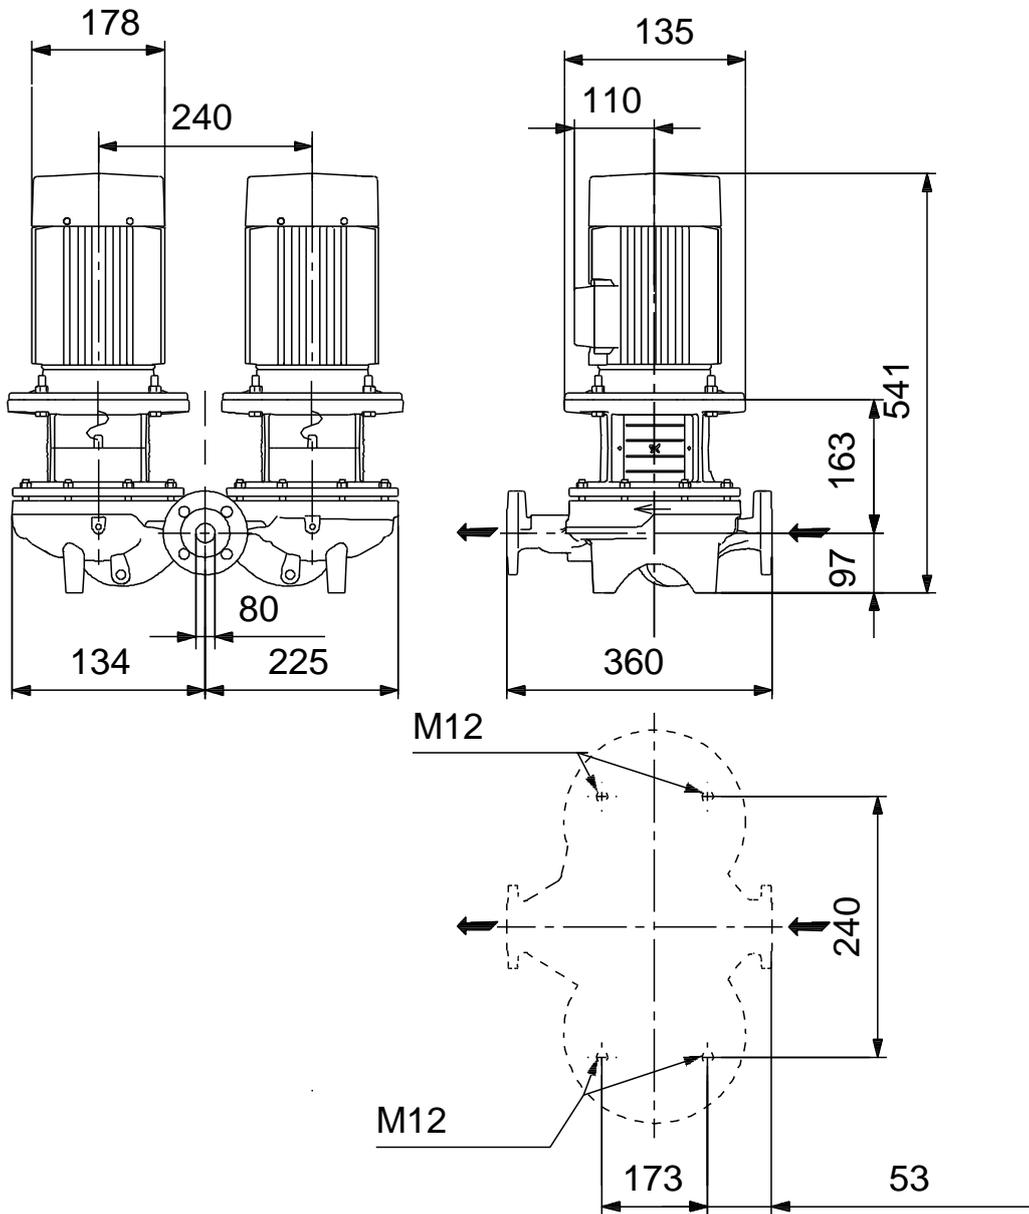

98958039 TPD 80-120/2 AI-F-A-BQQE-HX1 50

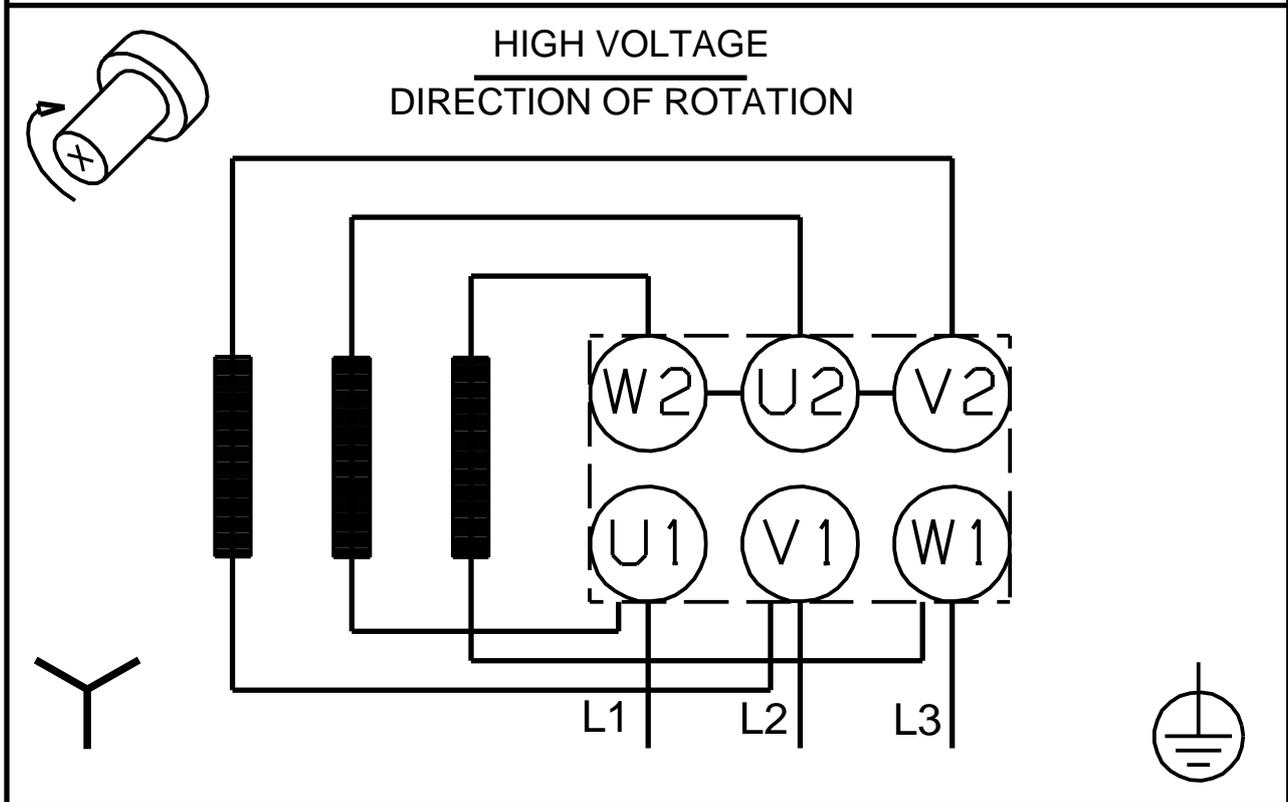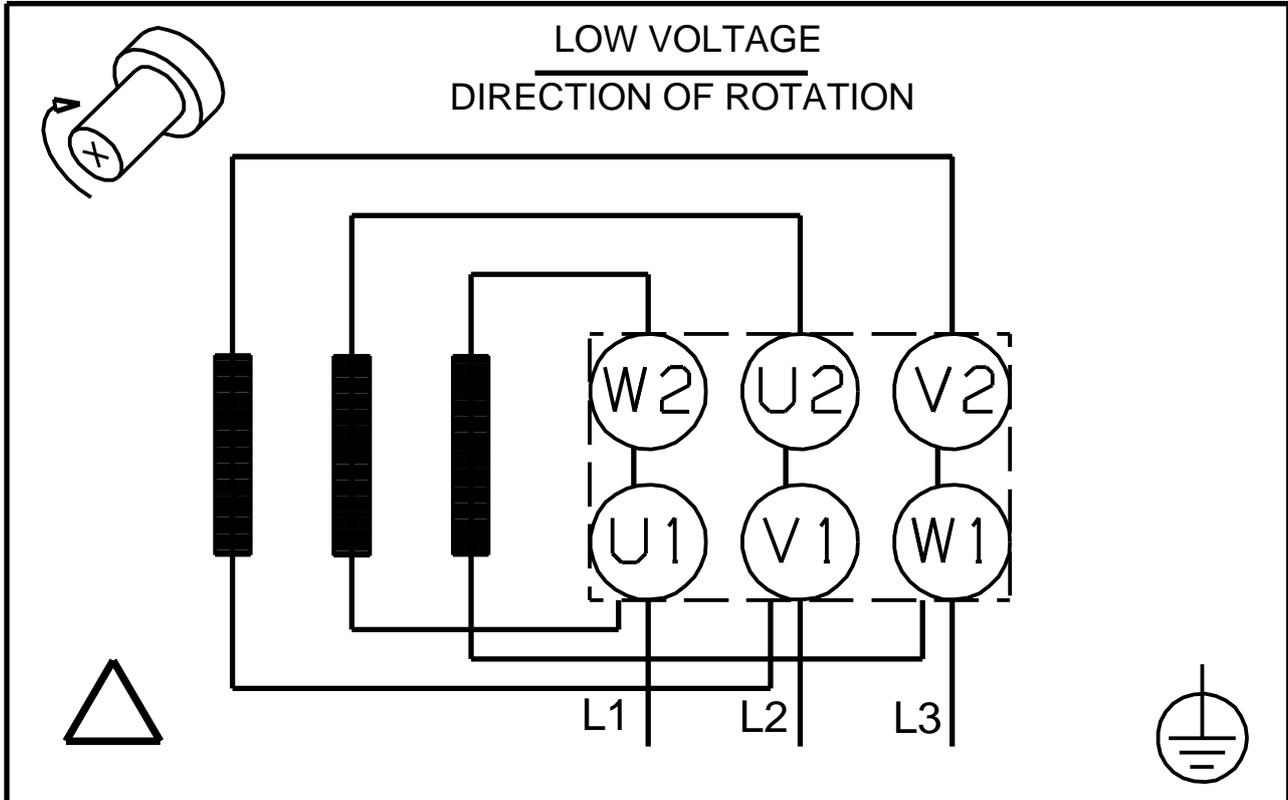

! [], .