

1 TPE 80-170/4 A-F-A-BQQE-KD3



: 99113699

12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2).

EN

IE5

IEC 60034-30-2.

Frequency converter:

: -25 .. 120 °C
: 20 °C
: 998.2 / 3

: 1455 /

: 67.9 3/
: 14.4
: 219
: BQQE
- : ISO9906:2012 3B2


c : EN-GJL-250
: ASTM class 35
: EN/DIN: EN-GJL-200
, AISI/ASTM: ASTM class 30

: -20 .. 50 °C





: 16
- : 16 / 120 °C
: DIN

: DN 80
 : PN 16
 : 500
 : FF215
 :
 : 112ME
 - : IE5
 - P2: 4
 : 50 Hz
 : 3 x 380-500
 : 7.70-6.00 A
 Cos - : 0.92-0.87
 : 180-2200 /
 : 90.3% : 90.3 %
 : 4
 (IEC 34-5): IP55
 (IEC 85): F
 : 98971183
 :
 : , MEI : 0.70
 (): 88.3
 (): 103
 : 0.38 ³
 Danish VVS No.: 382055170
 Finnish LVI No.: 4616478
 Norwegian NRF no.: 9043653
 C : RU
 : 8413705100

99113699 TPE 80-170/4 A-F-A-BQQE-KD3 50

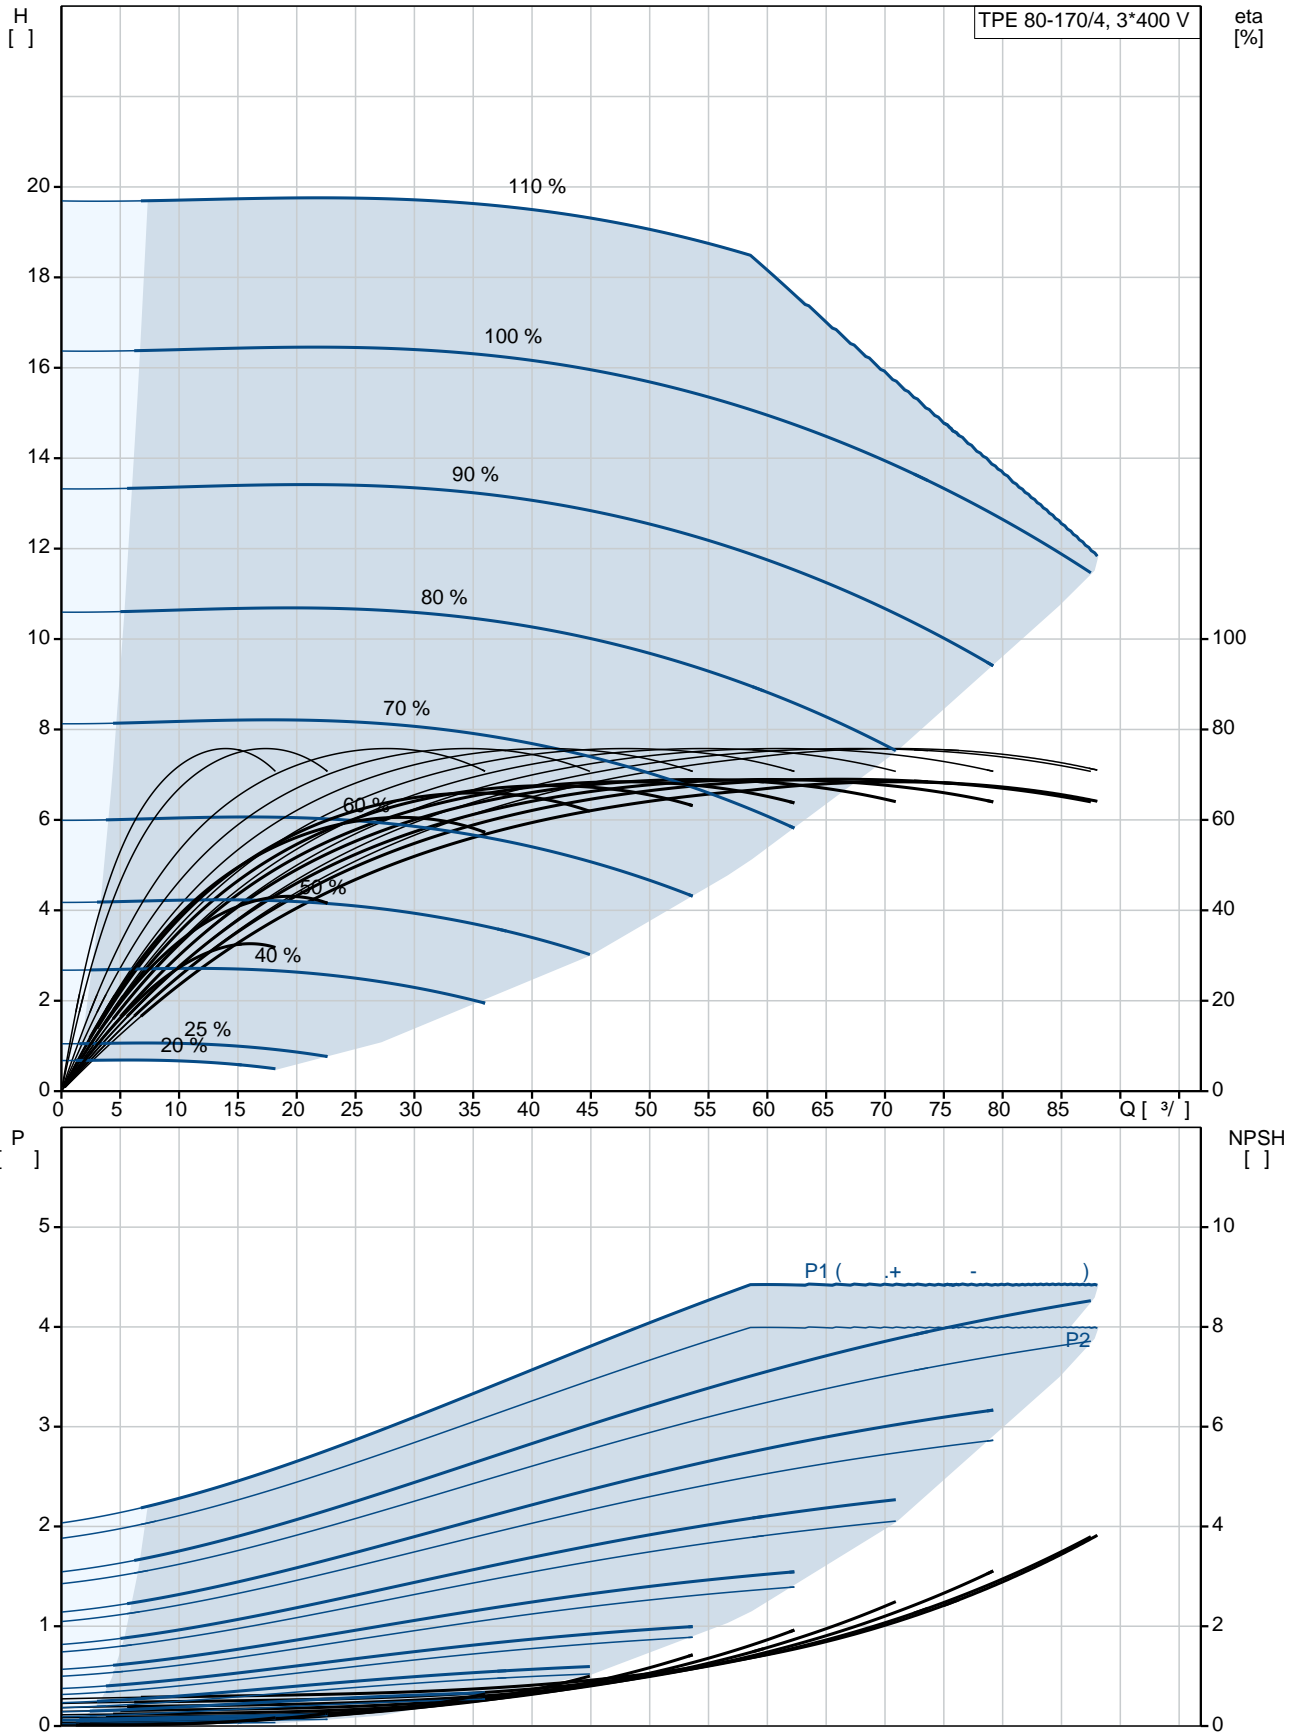


	TPE 80-170/4 A-F-A-BQQE-KD3
	99113699
EAN	5712607014575
	1455 /
	67.9 ³ /
	14.4
	170
	219
	BQQE
	ISO9906:2012 3B2
	A
	EN-GJL-250
	ASTM class 35
	EN-GJL-200
	ASTM class 30
	A
	-20 .. 50 °C
	16
	16 / 120 °C
	DIN
	DN 80
	PN 16
	500
	FF215
	F
	-25 .. 120 °C
	20 °C
	998.2 / ³
	112ME
	IE5
	- P2: 4
	50 Hz
	3 x 380-500
	7.70-6.00 A
Cos	0.92-0.87
	180-2200 /
	90.3%
	90.3 %
	4
	(IEC 34-5): IP55
	(IEC 85): F

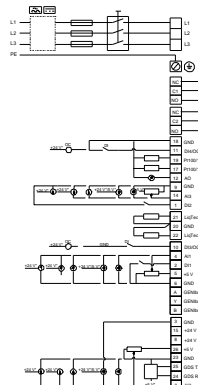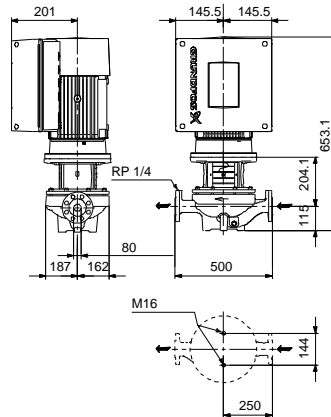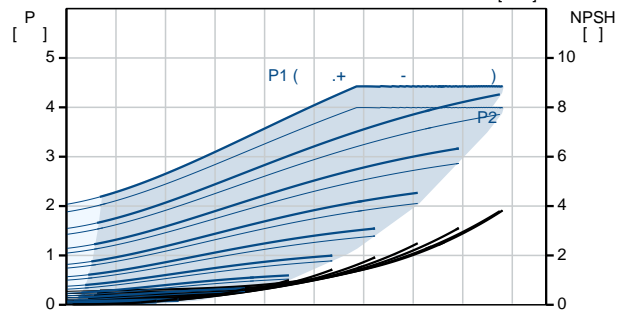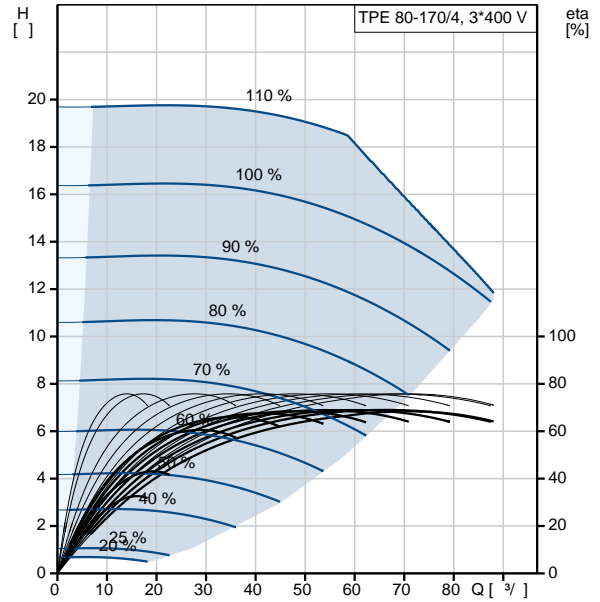

:	ELEC	
:	98971183	
:		
:	HMI200 -	
:	FM300 - Advanced	
:	()	
:		
:		
:		
, MEI :	0.70	
()::	88.3	
()::	103	
:	0.38 ³	
Config. file no:	99100731	
Danish VVS No.:	382055170	
Finnish LVI No.:	4616478	
Norwegian NRF no.:	9043653	
C :	RU	
:	8413705100	

99113699 TPE 80-170/4 A-F-A-BQQE-KD3 50

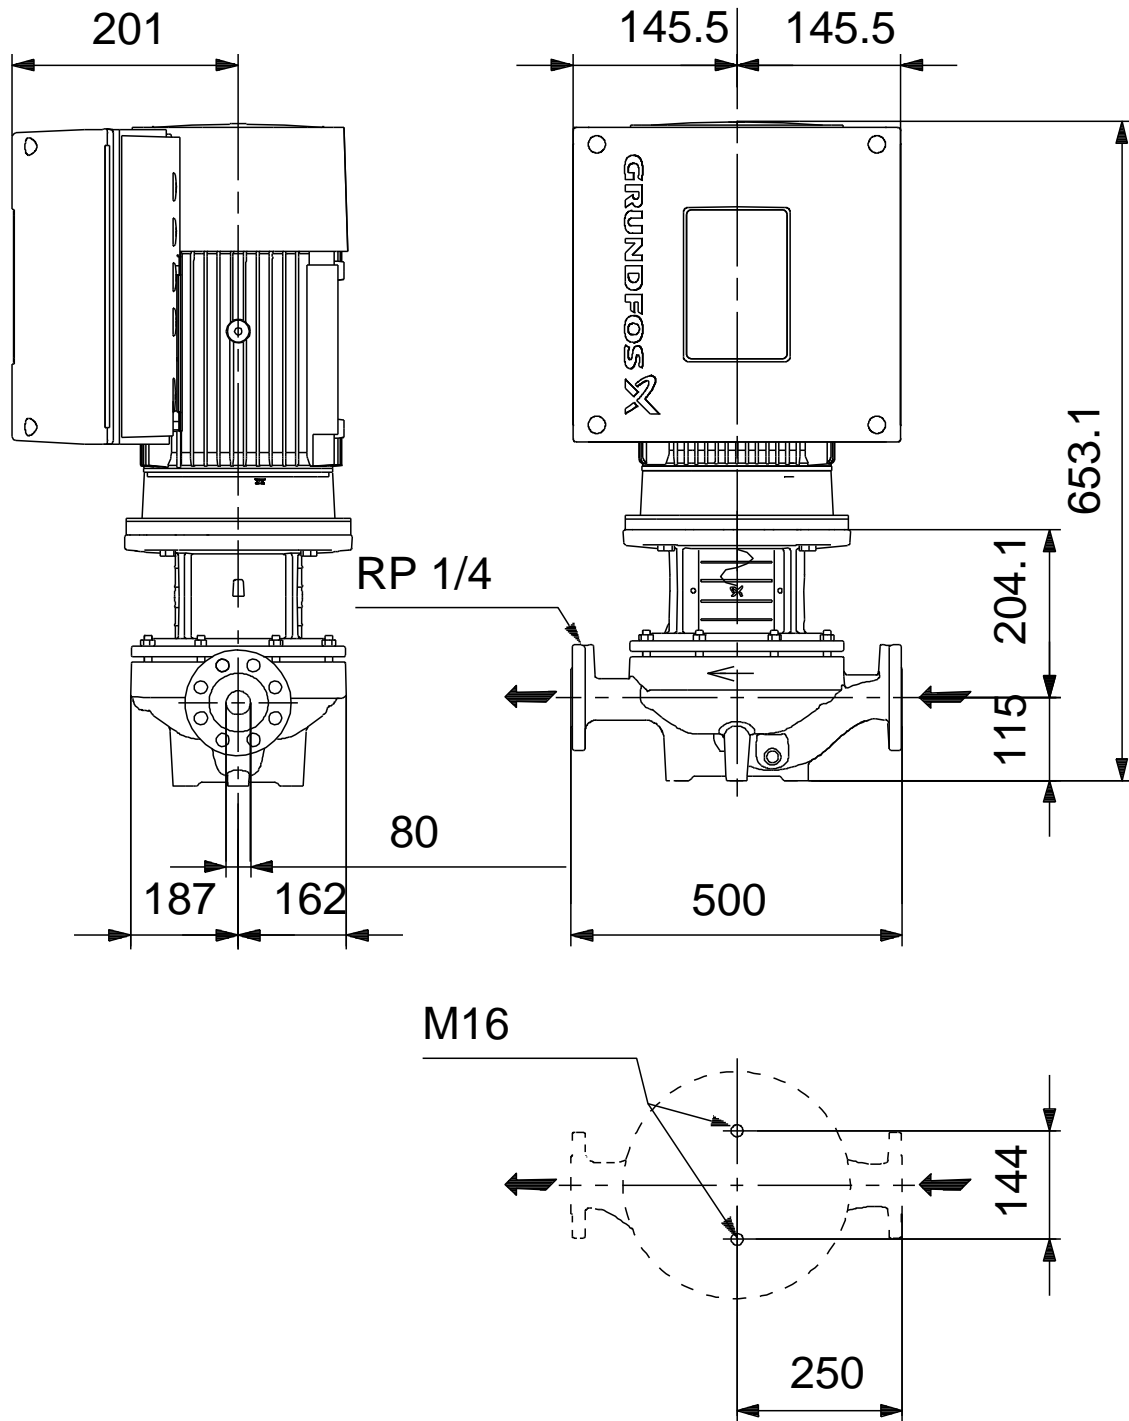

99113699 TPE 80-170/4 A-F-A-BQQE-KD3 50



!

[], .