

1 JP 4-47 PT-H BBVP



: 99463875

: Grundfos JP 4-47 PT-H Grundfos JP, Grundfos GT-H  
20

JP 4-47 PT-H

2,2

8

JP

: 0 .. 40 °C  
: 20 °C  
: 998.2 / 3

: 4 3/  
: 41  
: BBVP  
: CE, EAC  
: ISO9906:2012 3B

Adjustable start pressure:

Y

: 1.0 - 5.0  
: 2800 /

c : EN 1.4301  
AISI 304

: 0 °C

Maximum ambient temperature: 40 °C

: PN 6  
: G 1  
: G 1

- P1: 850  
: 50 Hz  
: 1 x 230  
: 3.8 A  
: 11.3 A  
- : 13 /450  
(IEC 34-5): IP44  
(IEC 85): F


Length of cable: 1.5  
: SCHUKO

: 20




: 14  
: 17

Finnish LVI No.: 4732540  
Norwegian NRF no.: 9040044  
C : HU  
: 8413705100

## 99463875 JP 4-47 PT-H BBVP 50

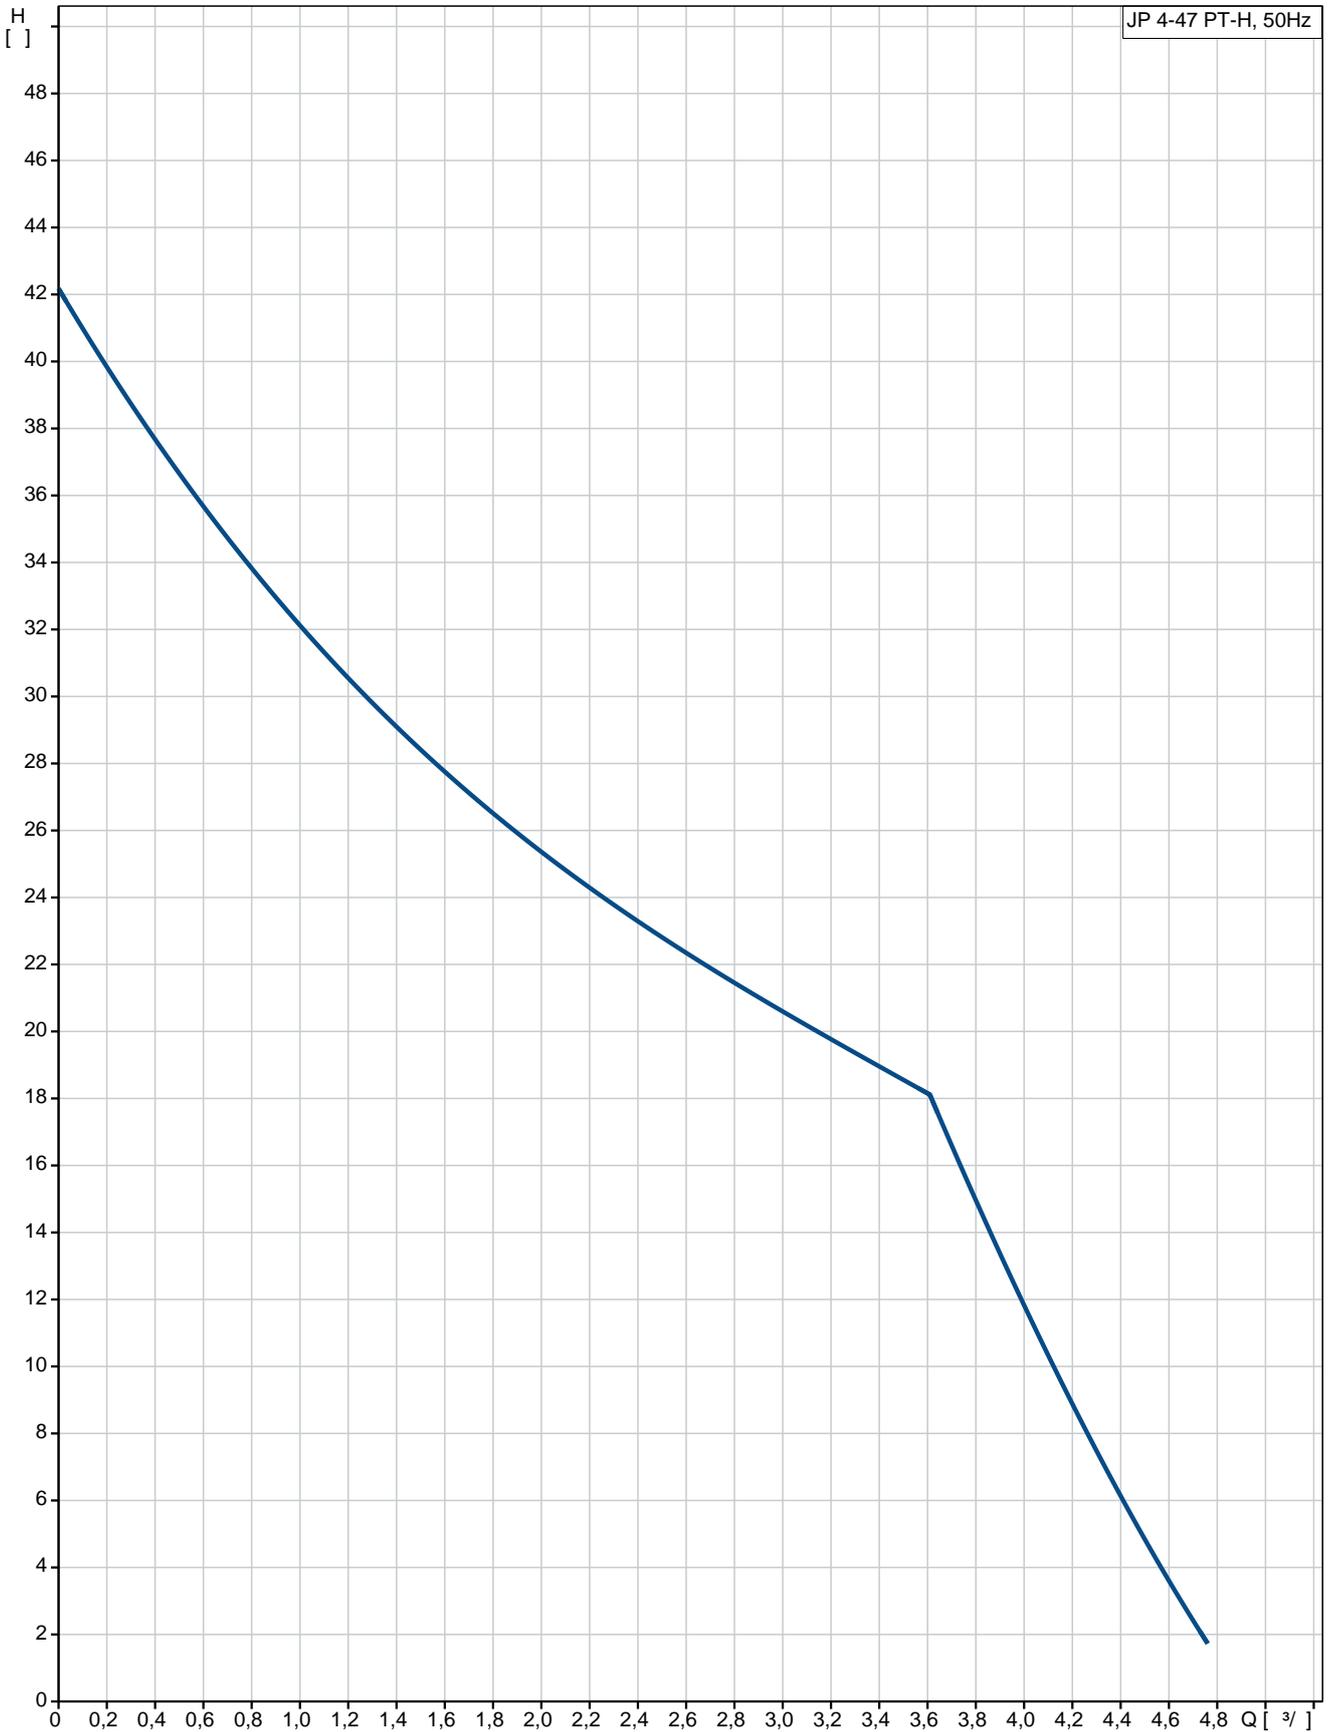

	JP 4-47 PT-H BBVP
	99463875
EAN	5713829542457
	4 3/
	41
	BBVP
	CE,EAC
	ISO9906:2012 3B
Adjustable start pressure:	Y
	1.0 - 5.0
	2800 /
	EN 1.4301
	AISI 304
	0 °C
Maximum ambient temperature:	40 °C
	PN 6
	G 1
	G 1
	0 .. 40 °C
	20 °C
	998.2 / 3
	850
- P1:	50 Hz
	1 x 230
	3.8 A
	11.3 A
	13 /450
(IEC 34-5):	IP44
(IEC 85):	F
Length of cable:	1.5
	SCHUKO
	20
	14
	17
Finnish LVI No.:	4732540
Norwegian NRF no.:	9040044
C	HU
	8413705100

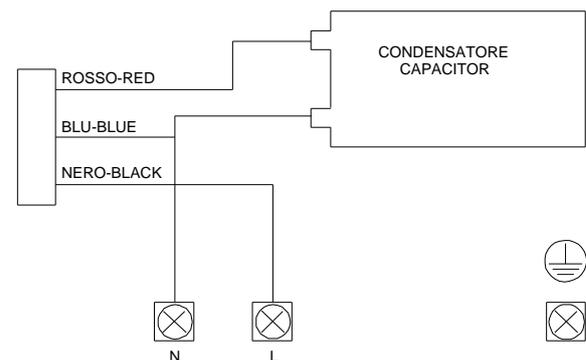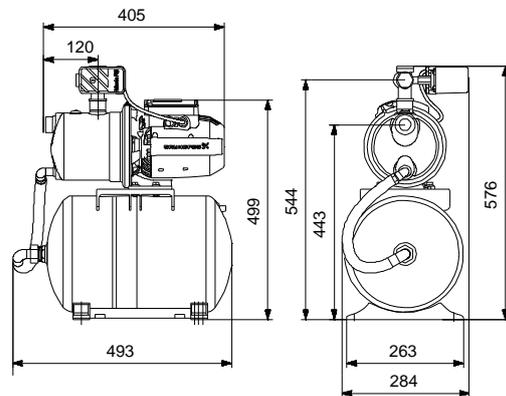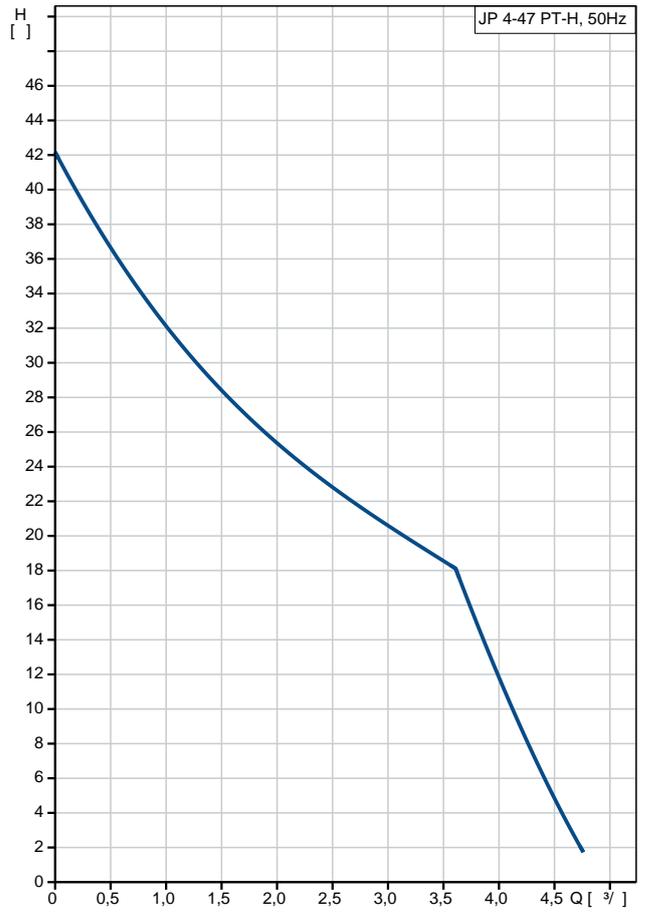

**99463875 JP 4-47 PT-H BBVP 50**

