

1 JP 5-48 PT-H BBVP



: 99594666

: Grundfos JP 5-48 PT-H Grundfos JP, Grundfos GT-H

20

JP 5-48 PT-H

2,2

8

JP

: 0 .. 40 °C

: 20 °C

: 998.2 / 3

: 5 3/

: 45.6

: BBVP

: CE,EAC

- : ISO9906:2012 3B

Adjustable start pressure: Y
: 1.0 - 5.0
: 2800 /

:
:
c : EN 1.4301
: AISI 304
:

: : 0 °C

Maximum ambient temperature: 40 °C
: PN 6
: G 1
: G 1


:
- P1: 1490
: 50 Hz
: 1 x 230
: 6.6 A
: 27.9 A
- : 25 /450
(IEC 34-5): IP44
(IEC 85): F

Length of cable: 1.5
: SCHUKO




:
: 60

:
: 25
: 28

99594666 JP 5-48 PT-H BBVP 50

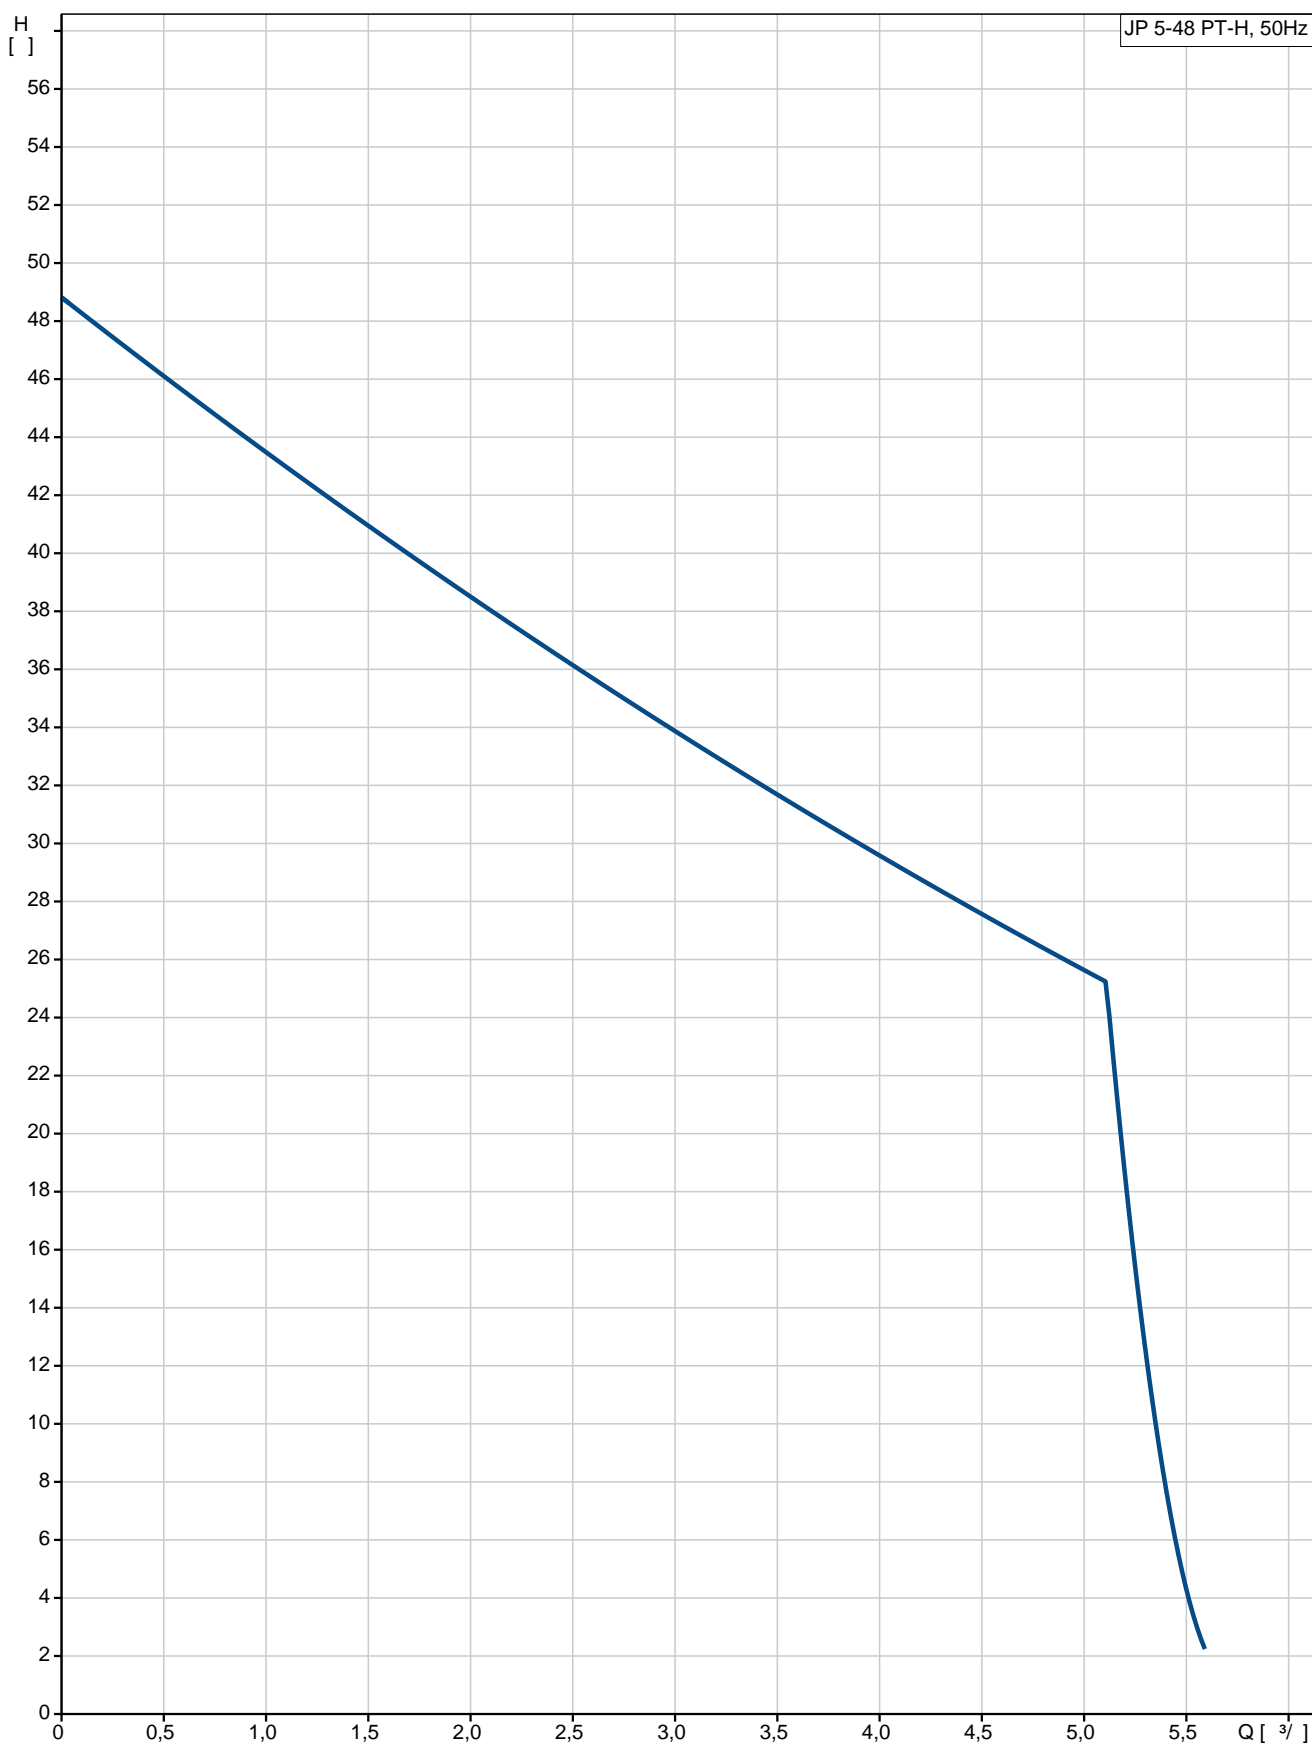

	JP 5-48 PT-H BBVP
	99594666
EAN	5713831612957
	5 3/
	45.6
	BBVP
	CE,EAC
	ISO9906:2012 3B
Adjustable start pressure:	Y
	1.0 - 5.0
	2800 /
c	EN 1.4301
	AISI 304
	0 °C
Maximum ambient temperature:	40 °C
	PN 6
	G 1
	G 1
	0 .. 40 °C
	20 °C
	998.2 / 3
- P1:	1490
	50 Hz
	1 x 230
	6.6 A
	27.9 A
	25 /450
(IEC 34-5):	IP44
(IEC 85):	F
Length of cable:	1.5
	SCHUKO
	60
	25
	28

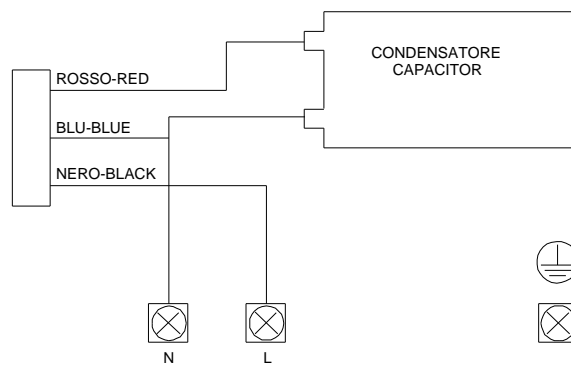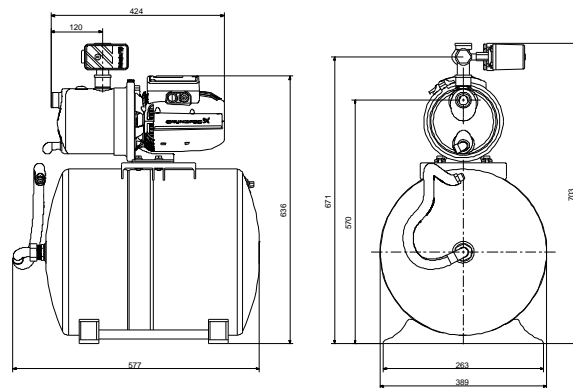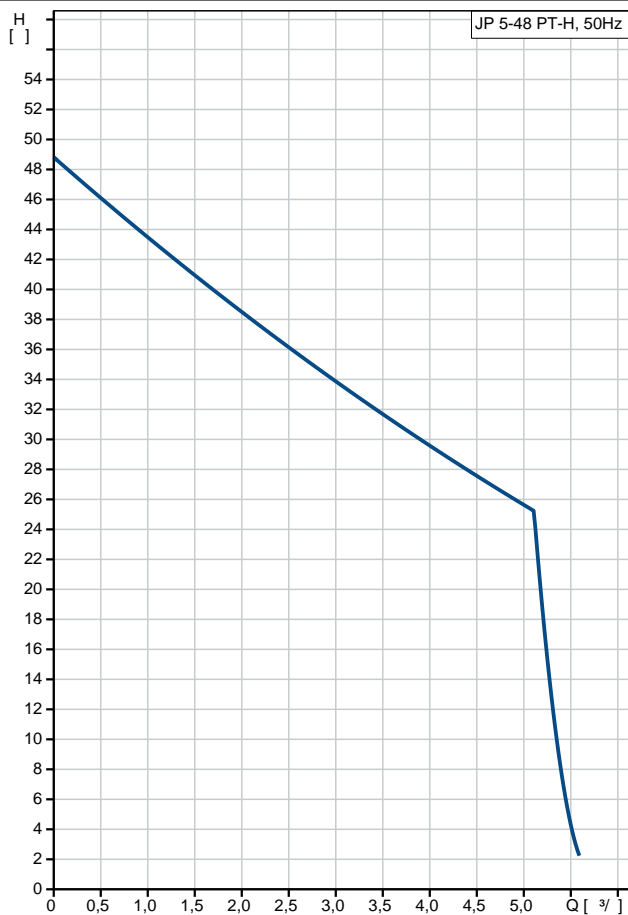

99594666 JP 5-48 PT-H BBVP 50

